
Submitted Model No.:_	
Specific Features:	

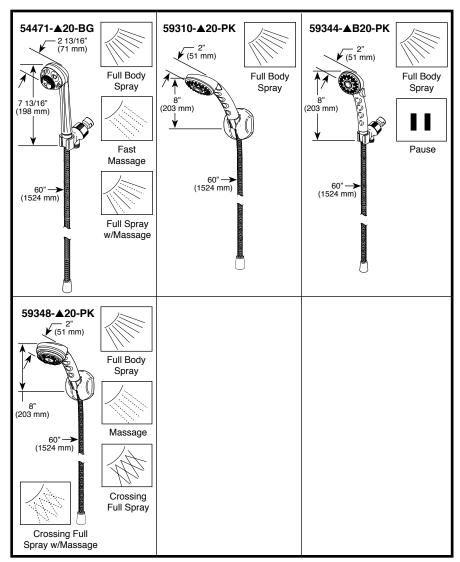

▲ Designate proper finish suffix

Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

ODELTA

PERSONAL HAND HELD SHOWERS

- 60" Hose
- Certified Dual Check Valves
- Shower Arm or Wall Mount

STANDARD SPECIFICATIONS:

- 60" ultraflex hose (54471: Stainless)
- Includes double check valves for backflow prevention.
- Meets EPA criteria for WaterSense.
- Shower arm mount: 54471, 59344.
- Wall mount: 59310, 59348.
- 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa).

WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.





COMPLIES WITH:

- ASME A112.18.1/CSA B125.1 ◆
- EPA WaterSense®





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2012 Masco Corporation of Indiana