Parts and Damage Replacement Procedure

1. Please inspect your purchase immediately.

ITEM IN THE SPACE PROVIDED BELOW.

Model Number

2. This procedure covers product purchased from an authorized Reseller and was received in its originally sealed carton.

A COPY OF YOUR PURCHASE RECEIPT OR INVOICE MUST BE ATTACHED TO THIS ORDER FORM. NO ORDERS WILL BE PROCESSED WITHOUT PROOF OF PURCHASE.

| NAM | 1E: | | | | | |
|-----------------|--|-----------------|---------------------------------|---|--|--|
| ADDRESS: | | | | (No Post Office Boxes) | | |
| CITY: | | STATE: | | ZIP: | | |
| PHONE: | | | FAX: | | | |
| EMA | IL: | | | | | |
| ()()() | Damaged /scratche Mechanical malfund Missing pieces Unfinished surface Wrong color | ed, cracked, b | roken, crushed | ck appropriate Box. , etc. echanisms, lid stays, etc. | | |
| () () () () | Missing pieces Unfinished surface | shorry arawer (| giiacs, 39919 6 1111 | octionisms, no stays, etc. | | |


IF MORE THAN ONE MODEL NUMBER IS LISTED ABOVE, PLEASE SPECIFY THE EXACT MODEL NUMBER OF

Part Letter Code


YOUR

Quantity


ASSEMBLY INSTRUCTION

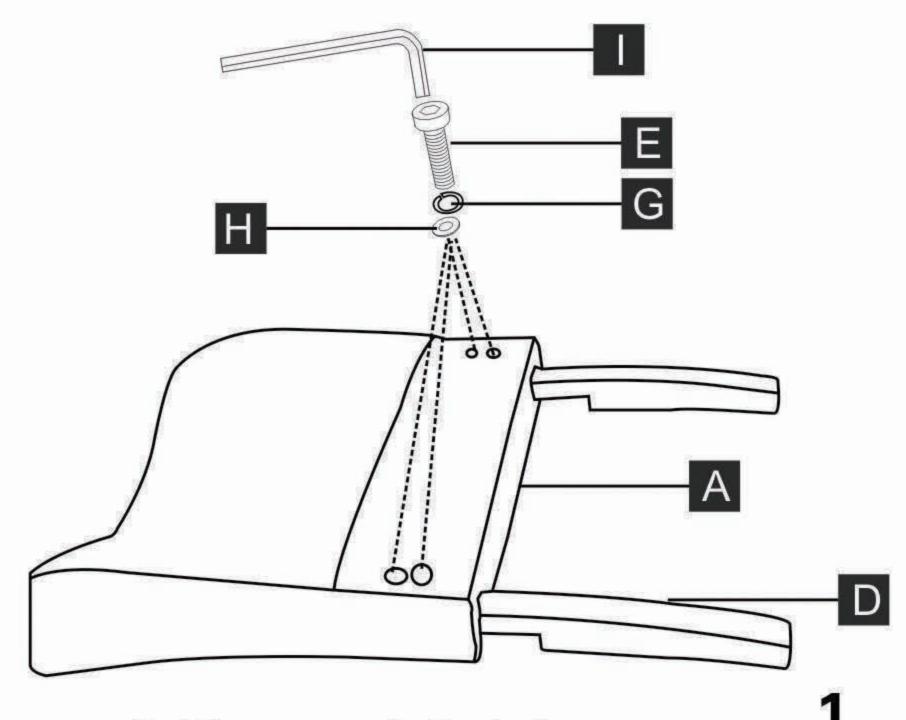


Put the screws in the holes, tight the screws, but not too tight, 100% is ok.

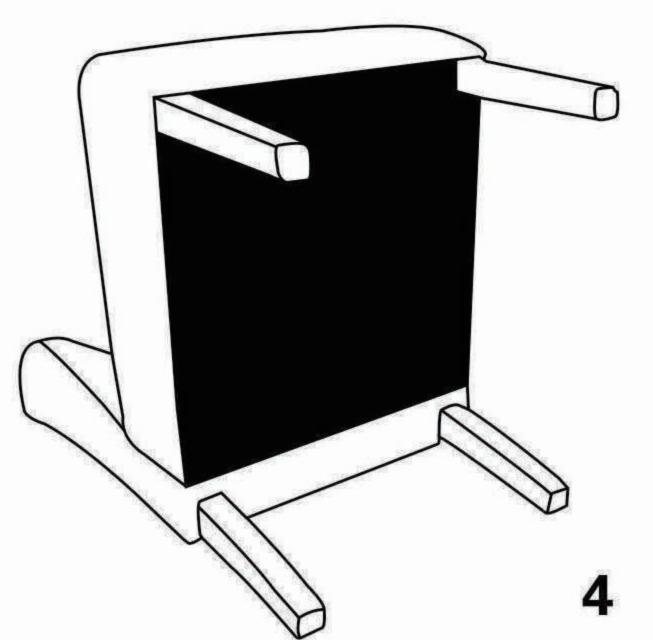


Stand the chair upright&ensure it is level before tightening all screws, Then tight all the screws to 100% Then Stick the black part on the seat

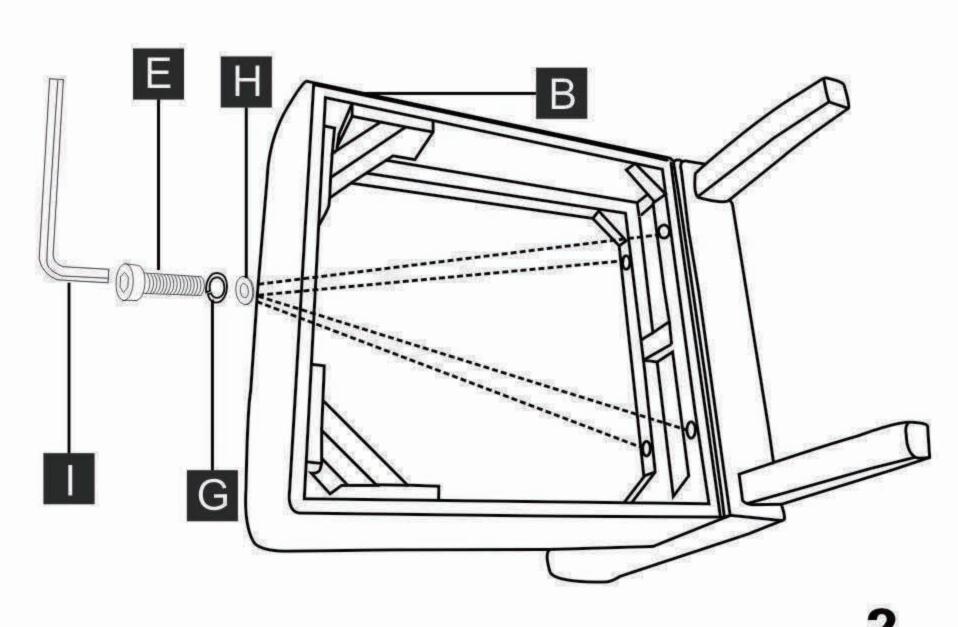


Put the screws in the holes, tight the screws, but not too tight, 90% is ok.

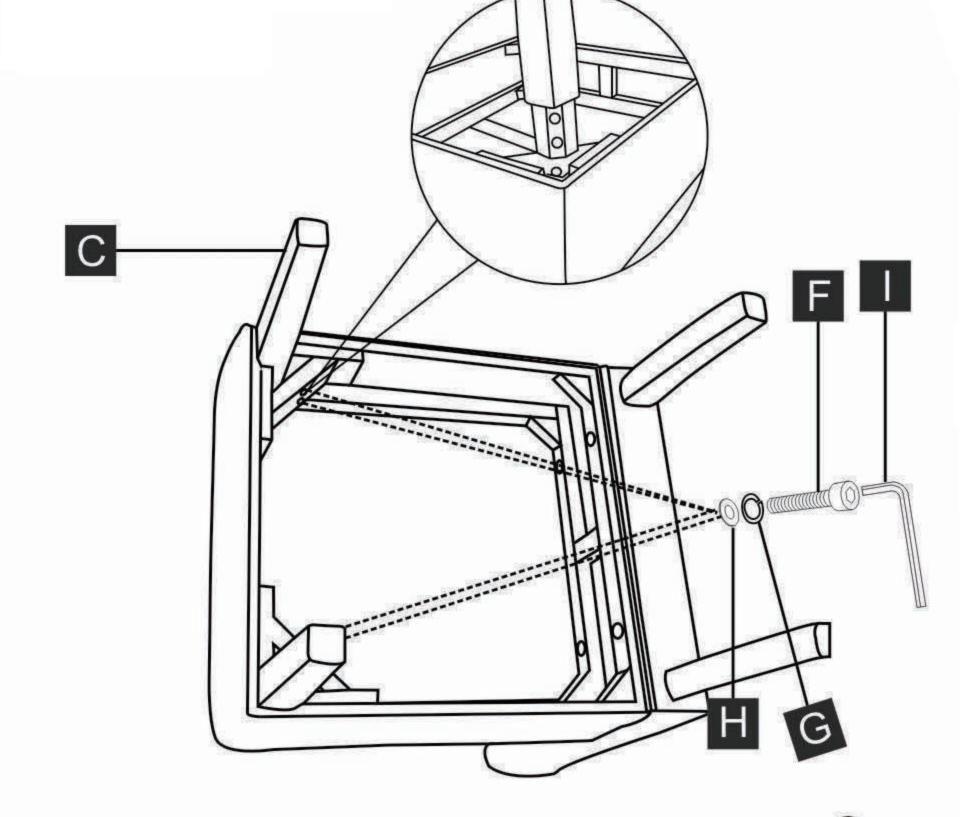

Put the screws in the holes, tight the screws, but not too tight, 90% is ok.

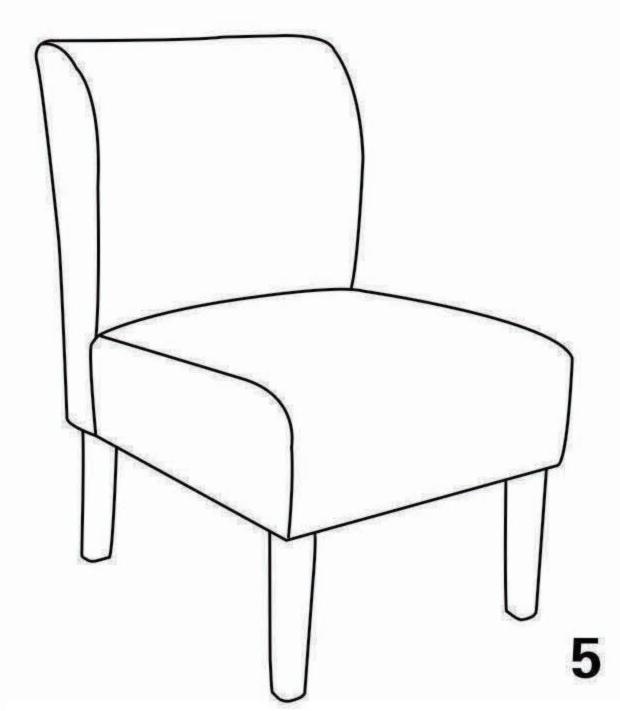

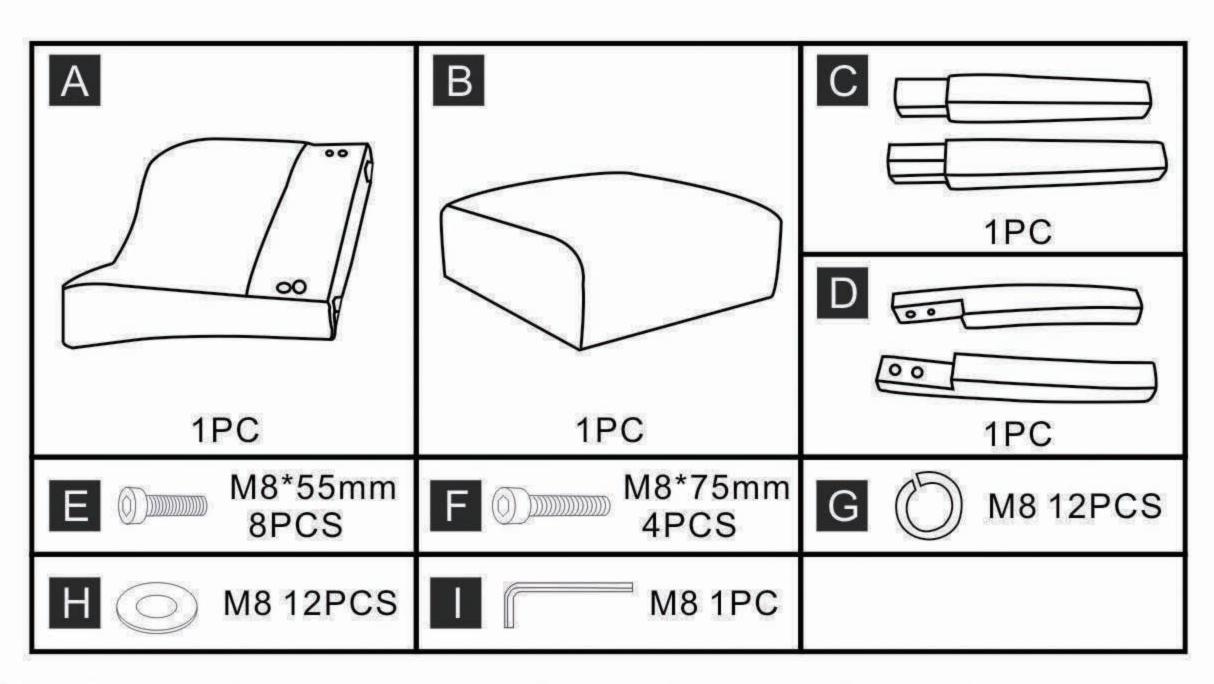

Please find leg and hardware pack inside the dust cover underneath seat cushion