
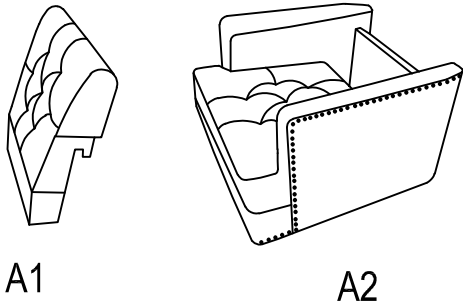

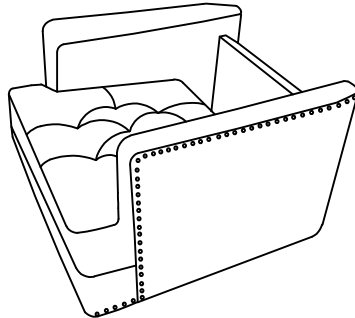



Parts List

Label	Picture	Description	QTY
A	 A1 A2	Chair :Seat Backrest(A1) and Seat Box(A2)	A1-1PC A2-1PC
B	 Front Legs	Wooden Legs	2
C	 Hind Legs	Wooden Legs	2
D		Washer Rings	7


Assembly Preparation

Before Beginning Assembly:

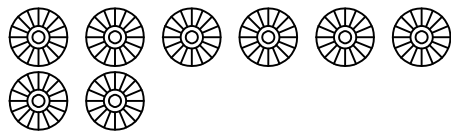

Assembly Steps


Step 1



Position the Chair on its back, as shown

The wooden foot is placed in the gap behind the seat frame and can be taken out directly


Step 2



Insert the threaded Stem
Into the threaded Hole.


Install the leg into the chair by putting a Washer Ring (improves tightness and security of leg) on the threaded stem, (The use of washer rings are OPTIONAL and is especially useful to help alleviate slight wobbliness); and then insert the threaded stem into the threaded hole at each corner of the bottom of the chair. Tighten by turning leg clockwise. Repeat the same procedure to install the other 3 remaining legs.

Step 3



Position yourself behind the chair. Place the back rest(A1) into the body slot(A2). While tilting the back rest slightly forward. Then gently pull the back rest towards you while pushing it down all the way into the Chair Seat slot. located to the rear of the seat box. (as marked by the arrow above).

Step 4



Make sure all parts are connected and locked into position before this chair is used.