
CAMMOO

Reliable, Durable, Dependable

OPERATOR'S MANUAL
60"HEAVY-DUTY ADJUSTABLE WORKBENCH

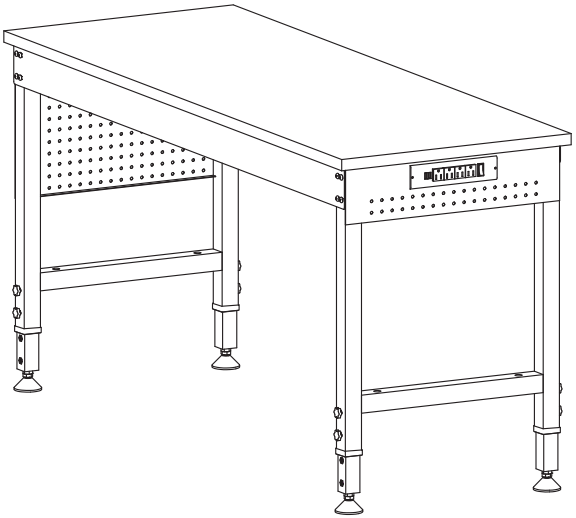

⚠ NOTES:

1. Please read and follow all safety rules and operating instructions before first use.
2. Check that all parts are present before assembling. If anything is missing, please contact us immediately.
3. **Returns:** Contact us for a free return shipping label to avoid any unexpected costs to you.
4. **Message Us:** Via the platform (Go to "Your Orders" and find this purchase)

We are committed to resolving your issue!

TABLE OF CONTENTS

Safety Information ---------- 1
Specifications ---------- 2
Package Contents ---------- 3
Assembly ---------- 4-7
Maintenance ---------- 7
Care and Cleaning ---------- 7

FOR YOUR SAFETY: CAREFULLY READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE USE.

SAFETY INFORMATION

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.

1. THIS PRODUCT IS INTENDED FOR INDOOR USE ONLY.

2. THIS PRODUCT IS NOT DESIGNED FOR COMMERCIAL NOR INDUSTRIAL USAGE.

⚠ CAUTION!

- Check all nuts and bolts periodically for tightness.When required, tighten them.
- DO NOT leave children unattended near this product.
- Keep the product on level surfaces. The product could become unstable and it may tip over if stored or moved on an uneven surface, which may cause personal injury, death or product damge.
- DO NOT alter this product in any manner. For example, do not weld external bar locks or attach electrical equipment. This may cause product damage or personal injury.
- Any assembly or maintenance of the product must be carried out by adults only.
- Use at least two people to move, assemble or install this workbench. Failure to do so can result in personal injury or product damage.
- DO NOT stand on the product and do not use it as scaffold.

3. EXTENSION CORD:

- Only use a three-wire extension cord with all three prongs intact. Never remove the round grounding prong.
- Extension cord must be connected to a 125Volt GFCI protected outlet with proper ground. If GFCI outlet is not available, use an extension cord with GFCI protection built in.
- Check the insulation and plugs of extension cord before using. Do NOT use cord if it is worn or damaged.
- Do NOT overload extension cord.
- Do NOT connect extension cord to outlet that also supplies critical safety equipment with power.
- Make sure the power supply cord is unplugged before any servicing or cleaning.

4. ELECTRICAL SHOCK HAZARD:

- Do not plug cord into outlet with wet hands.
- Do not use this workbench near a bathtub, a shower, or a swimming pool.
- Workbench plugs must match the outlet.
- Never modify the plug in any way.
- Unmodified plugs and matching outlets will reduce the risk of electric shock.
- Avoid body contact with earthed or grounded surfaces. There is an increased risk of electric shock if your body is earthed or grounded.

5. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.

Operation is subject to the following two conditions:

1) This device may not cause harmful interference, and
2) This device must accept any interference received, including interference that may cause undesired operation.

"Please note that changes or modifications of this product are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment."

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:



- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

SPECIFICATIONS

Model	WBC60
Specification	60"
Maximum load of workbench	2000 lbs
Adjust height of workbench	28.2"-38.8"
The length x width of table	60"x 22"
Maximum output of power strip	1500 watts
USB Current	5V DC, 2.1A

PACKAGE CONTENTS

- Ensure all components are present. If any components are missing, do not proceed with assembly. Message Us: Via the platform (Go to "Your Orders" and find this purchase).

PART	PIC	DESCRIPTION	QTY
A		Right leg	1
B		Left leg (with power strip port)	1
C		Rubber wood top	1
D		Wide beam	1
E		Narrow beam	1

PART	PIC	DESCRIPTION	QTY
F		Power strip	1
G		M8×15 inner hexagonal at head bolt	12
H		M4X15 screw	2
I		M5×12 self tapping screw	18
J		Glides	4
K		Hex key	1
L		Screwdriver	1

Tools required (not included):


Gloves


Goggles



Electric drill


ASSEMBLY

Step 1: Attach the legs


PART	A	B	C	I
DESCRIPTION	Right leg	Left leg (with power strip port)	Rubber wood top	M5×12 self tapping screw
PIC				
QTY	1	1	1	6


- Attach the Right leg(A) to the Rubber wood top(C) with 3pcs M5×12 self-tapping screws(I).



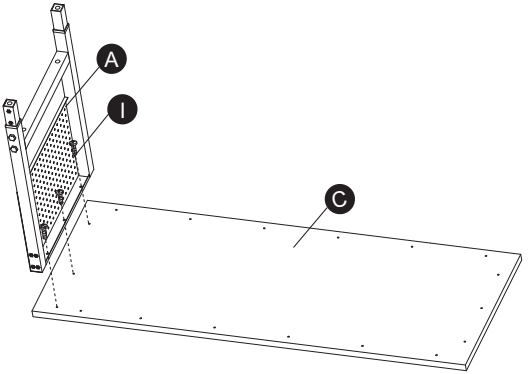

- Attach the Left leg(with power strip port)(B) to the Rubber wood top(C) with 3pcs M5×12 self-tapping screws(I).



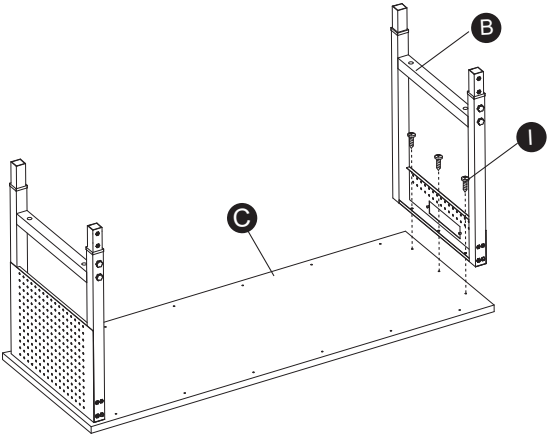

⚠NOTES:


- Assemble on a flat surface. A piece of cardboard is recommended to keep the product from being scratched during assembly.
- Since the wood is hard, an electric drill is recommended when assembling.
- Do not tighten all screws before completing Step 3.


ASSEMBLY

Step 2: Attach the beams


PART	D	E	I	G
DESCRIPTION	Wide beam	Narrow beam	M5×12 self tapping screw	M8×15 inner hexagonal at head bolt
PIC				
QTY	1	1	12	12


- Attach the Wide beam(D) to the Right and Left leg(A) and (B) with 8pcs M8X15 inner hexagonal at head bolts(G), and then attach the Wide beam(D) to the Rubber wood top(C) with 6pcs M5×12 self-tapping screws(I).

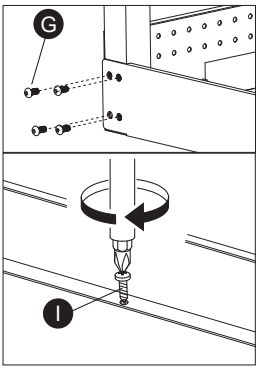

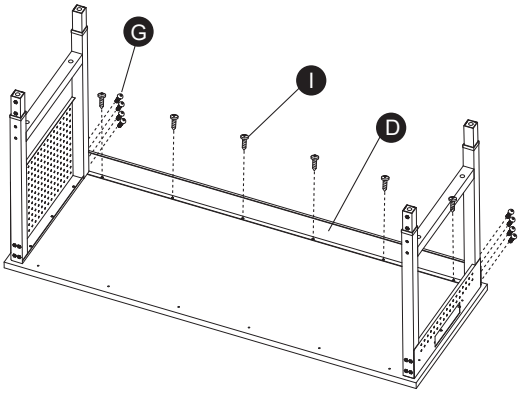

- Attach the Narrow beam(E) to the Right and Left leg(A) and (B) with 4pcs M8X15 inner hexagonal at head bolts(G), and then attach the Narrow beam(E) to the Rubber wood top(C) with 6pcs M5×12 self-tapping screws(I).

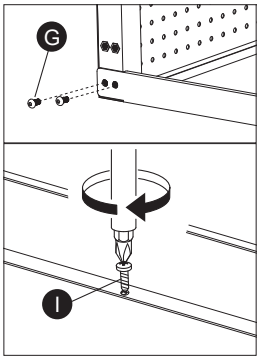

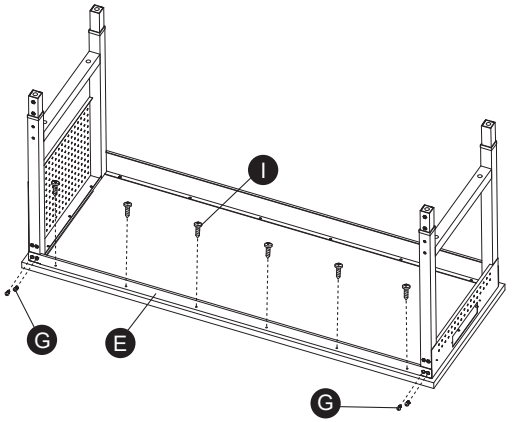


⚠NOTES:


- Since the wood is hard, an electric drill is recommended when assembling.
- You can adjust the assembly position of the leg with power strip as you need.

Step 3: Attach adjustable height for the workbench


PART	L
DESCRIPTION	Glides
PIC	
QTY	4


- Unscrew the pre-installed bolts on the legs, adjust it to the required height and then screw in the bolts.



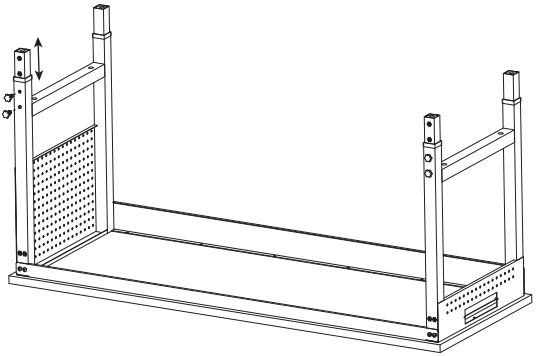

- Insert the adjusting Glides(L) and adjust it to the required height.



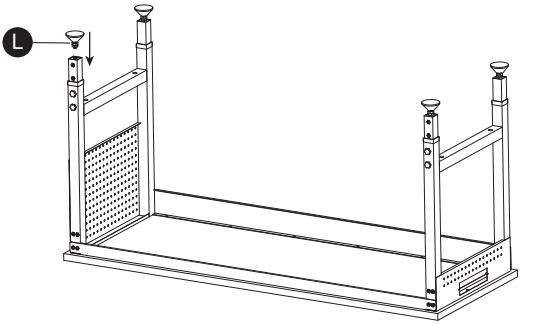

⚠NOTE:


- The workbench features 6 adjustable height levels. With glides installed, the overall height ranges from 28.2" to 38.8".

ASSEMBLY

Step 4: Attach the power strip

PART	F	H
DESCRIPTION	Power strip	M4X15 screw
PIC		
QTY	1	2

- Attach the Power strip(F) to the Left leg(with power strip port)(B) with 2pcs M4X15 screws(H).

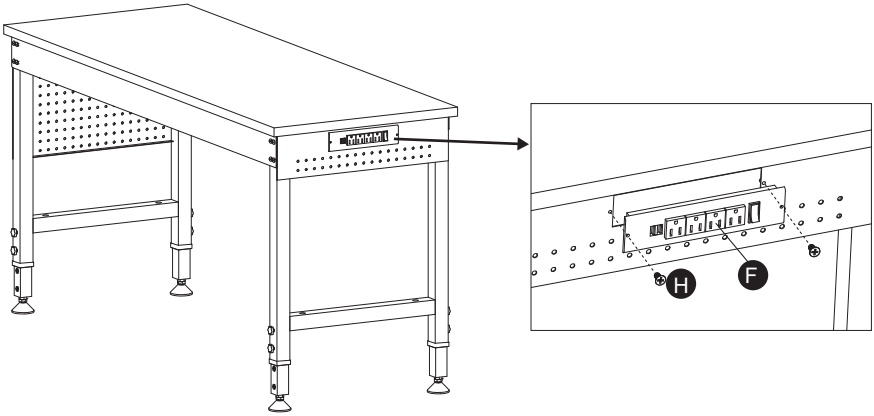

MAINTENANCE

- Check all nuts and bolts periodically for tightness. When required tighten them.

CARE AND CLEANNG

- Periodically clean the workbench surfaces with a soft rag and water. Grease and oil can be removed with most standard cleaning fluids. For safety, use a nonflammable cleaning fluid.

Manufacturer: Shenzhen Cammoo Trade Co,. Ltd.
Add: Fortune Building 39H-W2, 88 Fuhua 3rd Road, Gangxia Community, Futian Street, Futian District, Shenzhen City, Guangdong, China, 518000.

MADE IN CHINA