

Verdera® | K-99007-TL

24" x 30" lighted medicine cabinet

Features

- Internal LED light guides provide optimally bright bathroom vanity lighting for grooming tasks
- Brightness at 1300 lumens ensures consistent lighting with no hot spots or dark spots
- Approx. 3000 Kelvin light appearance delivers a neutral light ideal for overall bathroom aesthetics as well as tasks
- Minimum 80 CRI (color rendering index) lets you see yourself in the truest light for makeup application, grooming, and skin care
- Integrated LED bulbs have an estimated life expectancy of 36,000 hours
- Compatible with wall-mount LED dimmers (not included), which allow you to control lighting from multiple locations in the space
- Internal aluminum shelf has two electrical outlets for powering small devices such as toothbrushes and shavers
- Two adjustable tempered-glass shelves offer additional bathroom storage
- Front mirror, inside door mirror, and back panel mirror provide superior visibility to make grooming easier
- 108° door swing with soft-close hinges



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 00:06 - US-CA

THE BOLD LOOK
OF **KOHLER®**

Codes/Standards

cUL Listed
UL Listed

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Cutout

Width:	23-1/2" (597 mm)
Height:	28-1/4" (718 mm)
Depth:	3-11/16" (94 mm)

Material

- Anodized aluminum construction with a durable rustproof and chip-resistant finish

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-99012 30" mirrored side kit for medicine cabinet

Required Electrical Service


One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Outlet, Lights:	120 V, 15 A, 60 Hz
-----------------	--------------------

Electrical Component Ratings

Outlet:	120 V, 15 A, 60 Hz
Lights:	120 V, 0.8 A, 60 Hz



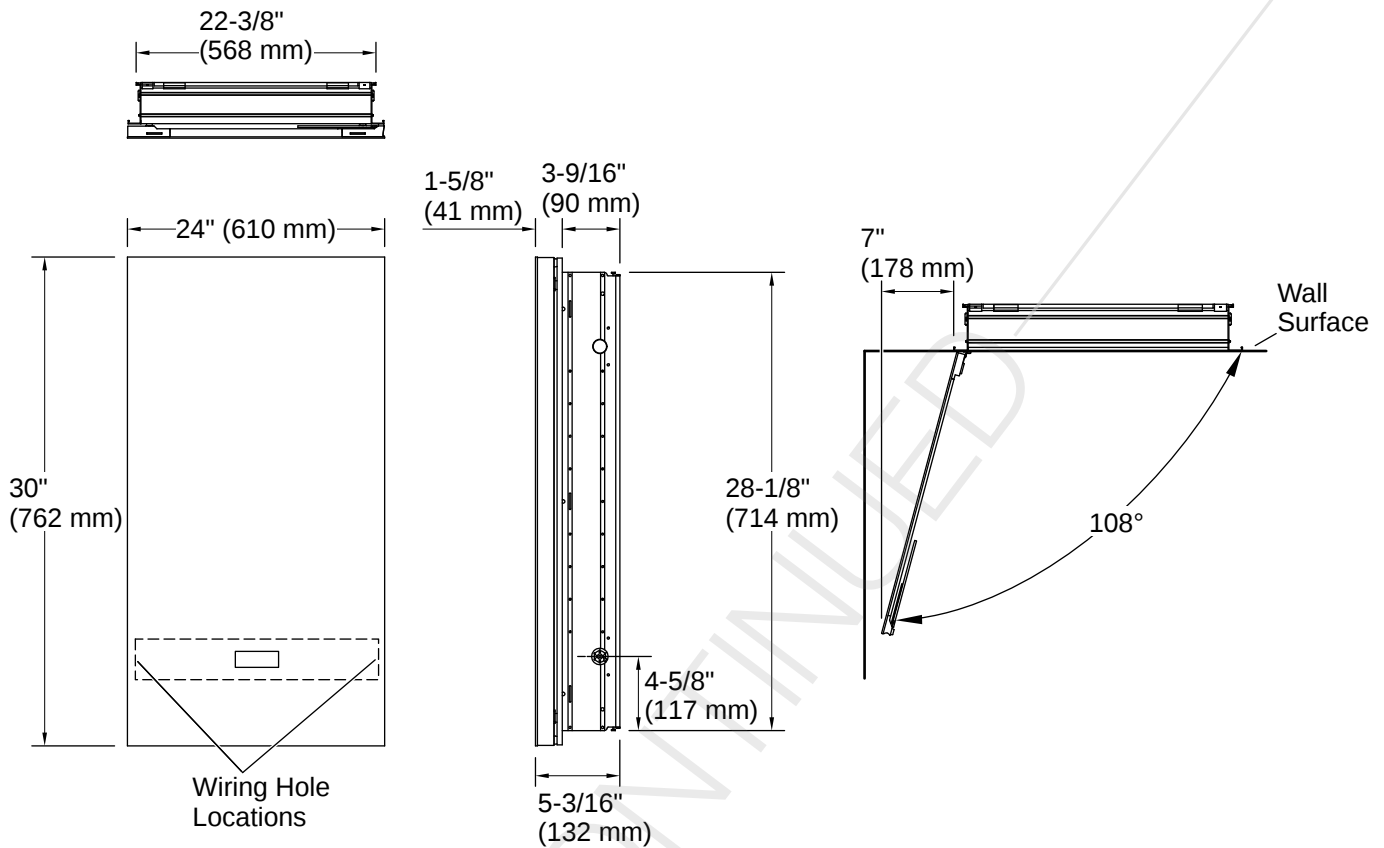

Installation

- Can be installed with left- or right-hand swing
- Includes mounting hardware for surface or recessed installation
- Mirrored side kits for surface mount installation sold separately

Installation Notes

Install this product according to the installation instructions.

To recess mount, the wall cavity must be framed and the cabinet secured to framing studs. Reroute electrical or water supply lines from the cavity. Consult a professional if drain or vent piping is encountered, or if the wall is load-bearing.

To determine the height of the cabinet, ensure the door will clear all obstacles (such as a faucet). A minimum 3" (76 mm) distance is required.

A dimmer switch is required. This product is compatible with most residential dimmer switches intended for incandescent and dimmable LED bulbs.

Cutout for recess-mount installation: 23-1/2" (597 mm) width x 28-1/4" (718 mm) height x 3-11/16" (94 mm) depth.

