


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

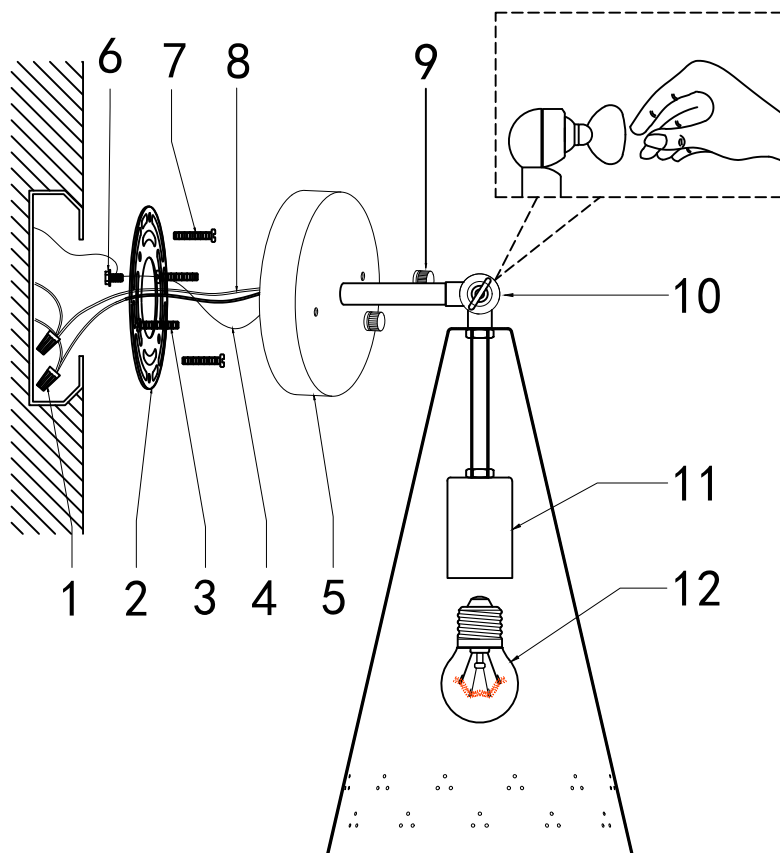

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Secure the mounting bracket (2) to the junction box using the screws (7).
2. Wiring Connections
 - Use wire connectors (1) to connect the fixture's black ("L") wire to the house's black wire (+), the white ("N") wire to the white wire (-). Secure the fixture ground wire (4) and the house ground wire to the mounting bracket (2) using the green grounding screw (6).
 - Ensure no exposed conductors remain outside wire connectors or outside the junction box.
3. Slide the fixture backplate (5) onto the threaded studs (3), then secure the assembled light by tightening the decorative nuts (9).
4. Loosen the adjustable swivel joint (10) by turning it counterclockwise. Adjust the shade to the desired direction, then tighten the joint clockwise to lock it in place.
5. Install the light source (12) into the socket (11) as indicated (bulb not included).
Restore power to test the fixture.
Installation complete.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.