


outline drawing:

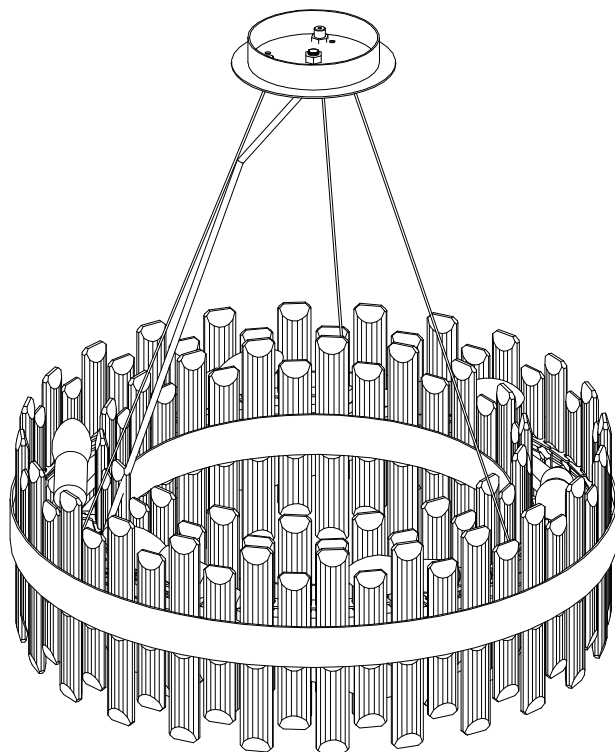


model:

Technical data: Power supply
voltage 110-120V, bulb type
E12Max40Wx12PCS (not included)

CAUTION



- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation. If the wires are defective, do not attempt installation .
- In some countries, electrical installation work can only be carried out by authorized electrical contractors. Please contact the local power department for advice.



IMPORTANT Before starting the installation work, please make sure to cut off the power supply to the circuit.

IMPORTANT Keep children away from the installation process .

Required tools (not included):



Ladder



Phillips
screwdriver



pincers

Required tools (including):




Hex
Wrench



glove

The hardware kit provides:

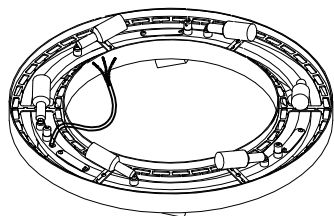


Lamp, lamp body



CONNECTORS



Installation board



tray



mounting screw



Hanging plate screws



76#*2 Long crystal A-42 string




100#*2 long crystal B-42 string



cable tie




Gecko rubber stopper



Self tapping screws


•The components displayed on each lamp may vary slightly

step 1

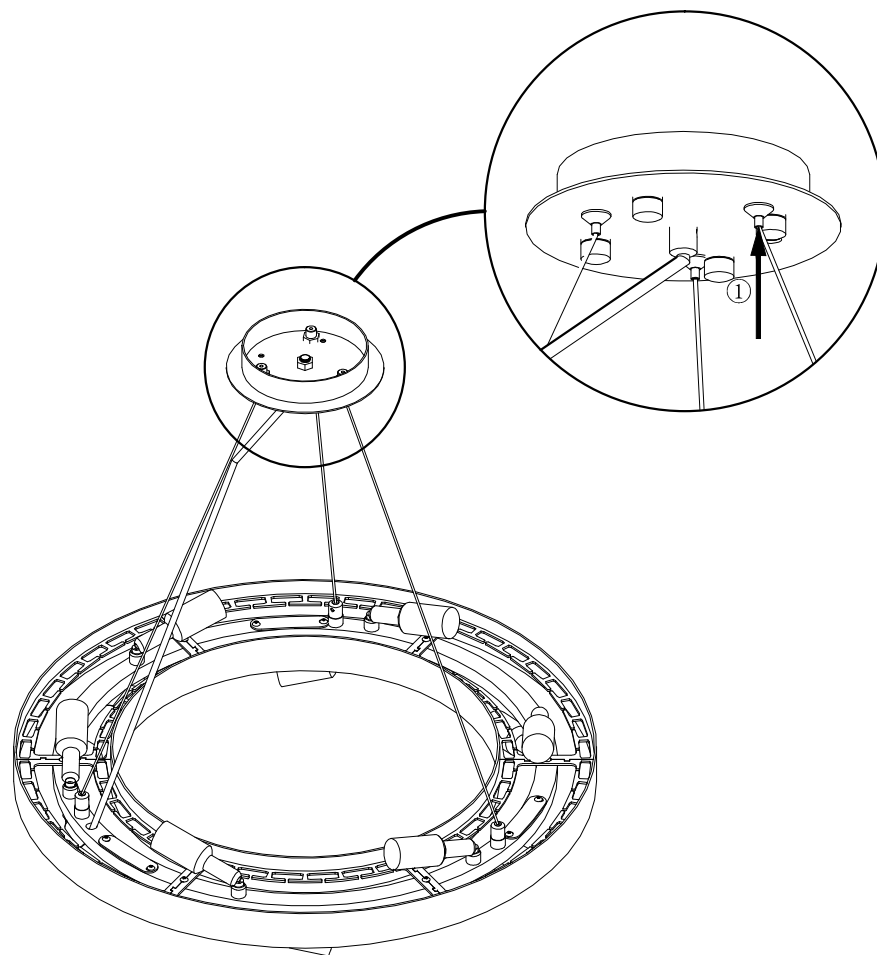


① Thread the steel wire rope through the small hole adjusted by the regulator, thread the main wire through the large hole lock wire head, and adjust the installation height of the lamp through the regulator.

Step 2

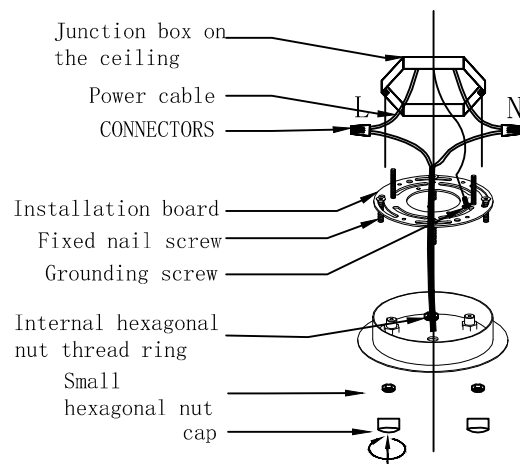


- ① Thread all the wires through the canopy and installation kit.
- ② Connect the power cable with two cable connectors.
- ③ Connect the grounding wire and tighten it with the grounding screw.
- ④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws.
- ⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut.
- ⑥ Tighten the fixing screws on the rain shelter holes.
- ⑦ Tighten the cap tightly.

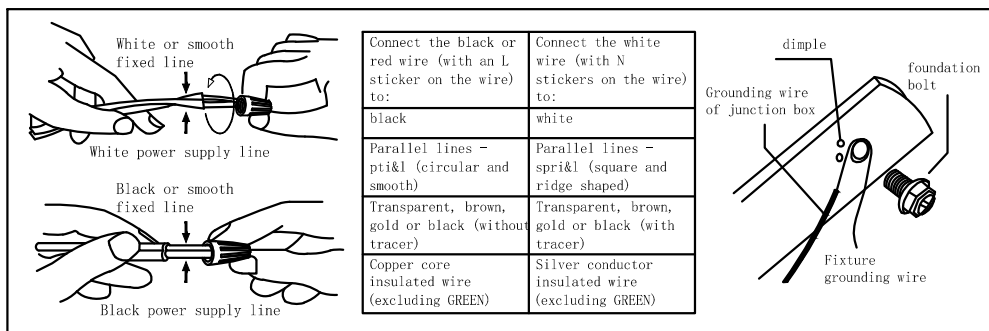

Step 3

Kind reminder: Before installing the crystal, please clean it thoroughly .

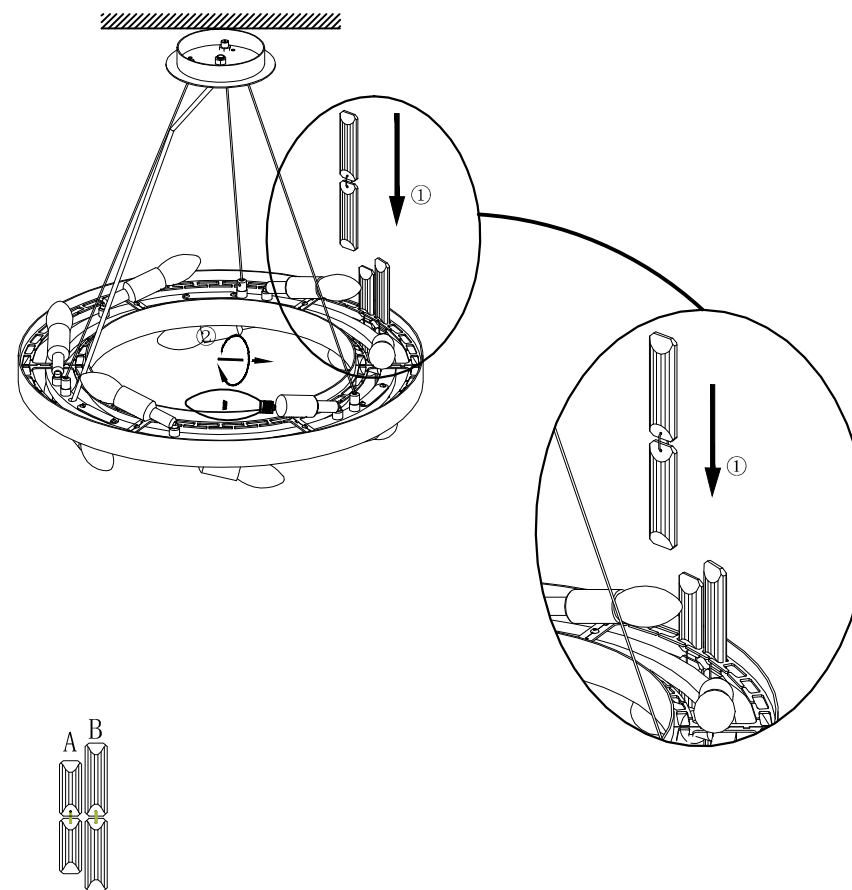

Crystal installation:
Two types of crystal
strings intersecting
and hanging

- ① Place the crystal on the crystal rack by threading it through the gap in the hardware ring from above or below.
- ② Tighten the light bulb (E12 maximum 40W, not included).