



# FLEXStyle™


## TECHNICAL SPECIFICATIONS FLEXSTYLE SHOWER WALLS

### DESIGN FEATURES:

- Acrylic Capped ABS Coextruded bi-color sheet system.
- 7" hexagon tile or 10x20 block patterns
- White sheet with gray grout lines
- Chemical & UV Resistant material
- Non-porous easy to clean system
- High Gloss, high impact, PMMA-based top layer



| MODEL              | DESCRIPTION                                                                                   |
|--------------------|-----------------------------------------------------------------------------------------------|
| FST6036803-WG-B-NI | FlexStyle 60"W x 36"D x 80"H White/Gray Block Shower Wall Surround with Brushed Nickel Trim   |
| FST6036803-WG-H-BK | FlexStyle 60"W x 36"D x 80"H White/Gray Hexagon Shower Wall Surround with Black Trim          |
| FST6036803-WG-H-NI | FlexStyle 60"W x 36"D x 80"H White/Gray Hexagon Shower Wall Surround with Brushed Nickel Trim |
| FST6036803-WG-B-BK | FlexStyle 60"W x 36"D x 80"H White/Gray Block Shower Wall Surround with Black Trim            |

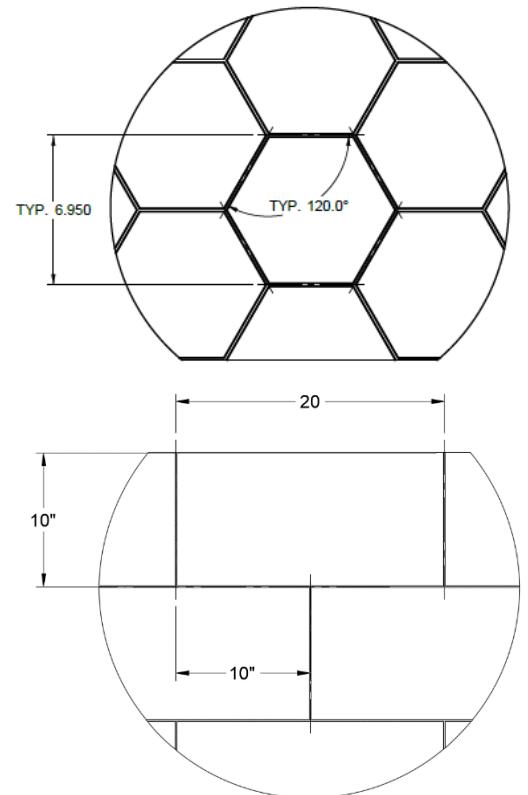

**Impact Resistance:** ASTM D-256 Izod Impact strength 3.2 ft-lbs/in

**Fire Tested:** Vicat softening temperature 120°C/h, Heat Deflection temperature annealed (264 psi) 203°F, Burning Behavior HB UL 94

**UV Tested:** ASTM D1729 dE of < 0.06 no noticeable color change