
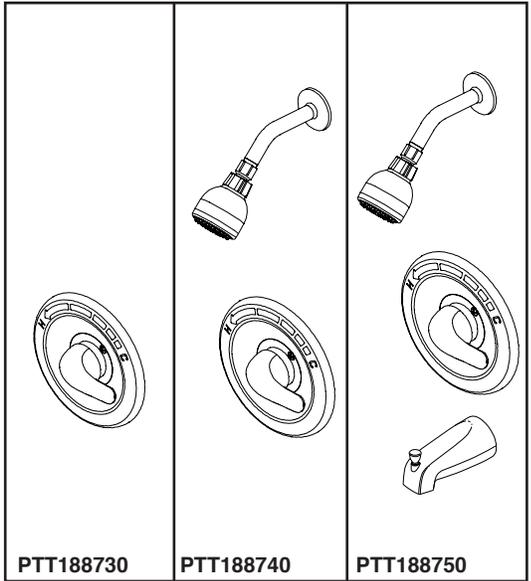
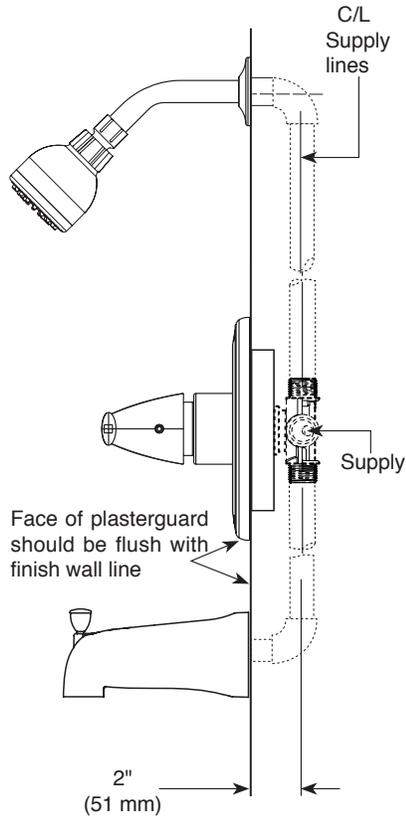


# PEERLESS®

PTT188730  
PTT188740  
PTT188750

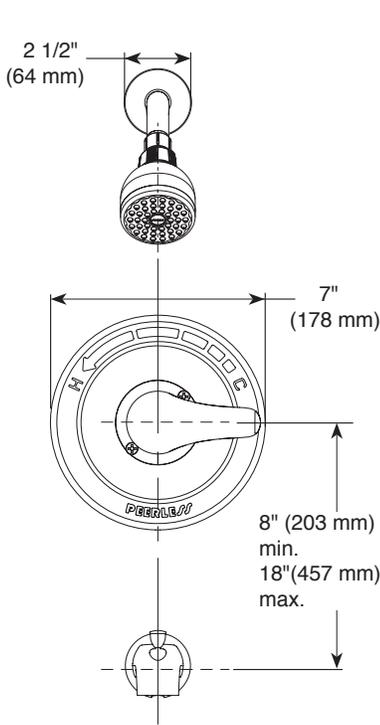

### TUB AND SHOWER FAUCET TRIM




- Valve Only (PTT188730 Series)
- Shower Only (PTT188740 Series)
- Tub/Shower (PTT188750 Series)

### STANDARD SPECIFICATIONS:

- Slip-on tub spout, model PTT188750.
- Pressure balanced bath mixing valve.
- Tub/Shower. Requires 1 1/2" wall cavity.
- Back-to-back installation capability.
- Temperature control to rotate a maximum of 120° from full cold to the maximum temperature.
- Temperature only controlled with handle.
- Showerhead maximum flow rate is 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa.
- For use with PTR188700 Series rough valve body; not included.

### WARRANTY:

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

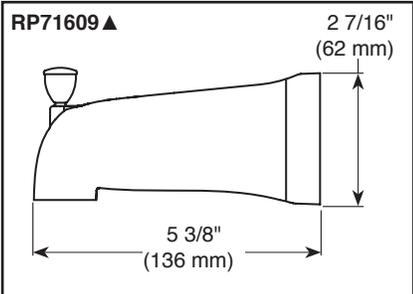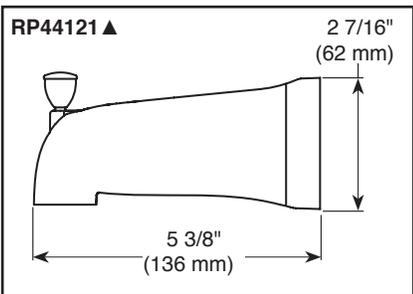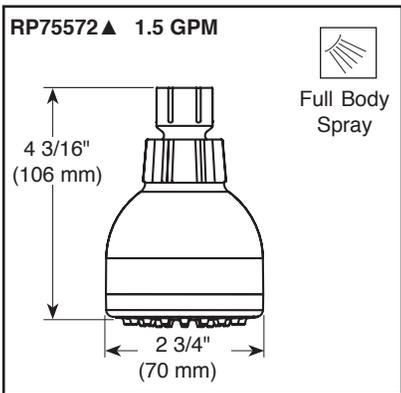

\*1/2"-14 threaded tub spout with slip-on adapter included



### COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
  - EPA WaterSense® - Applies to PTT188740 and PTT188750 only
- Indicates compliance to ICC/ANSI A117.1 - Valve control only