


Assembly and Installation Instructions

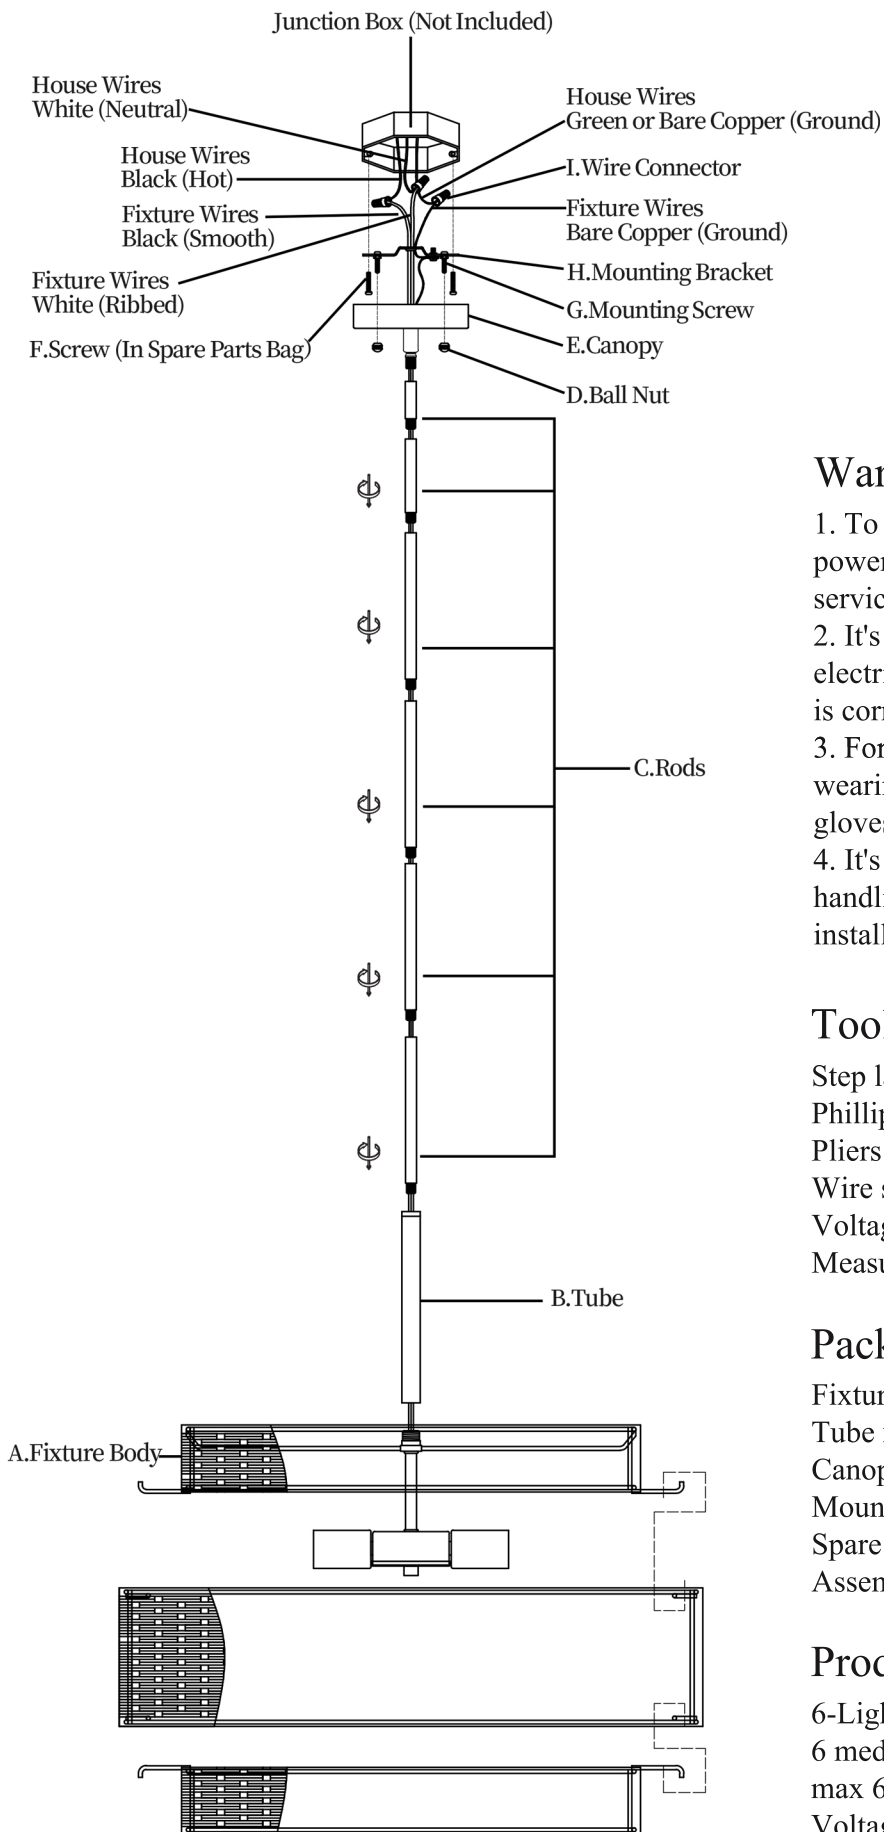

Warning

1. To prevent electrical shock, always turn off the power at the circuit breaker before installing or servicing this chandelier.
2. It's recommended to consult a professional electrician to ensure the branch circuit conductor is correct and for help with complex installations.
3. For added safety during installation, consider wearing appropriate protective gear such as gloves and safety glasses.
4. It's recommended to have an assistant for handling and securing the chandelier during installation as this chandelier is heavy.

Tools Required

- Step ladder
- Phillips head screwdriver
- Pliers
- Wire strippers
- Voltage tester
- Measuring tape (to adjust height)

Package Contents

- Fixture Body x 1 & Lampshade x 2
- Tube x 1 & Rod x 6
- Canopy x 1
- Mounting Bracket x 1 & Mounting Screws x 2
- Spare Parts Bag x 1
- Assembly and Installation Instructions x 1

Product Specifications

- 6-Light Chandelier
- 6 medium base (E26) bulbs, max 60W each (bulbs not included)
- Voltage: 120V

Assembly Instructions

1. Unpack the fixture carefully, checking all parts for completeness and free of damage. If you find any missing or damaged parts, please reach out at your earliest convenience for a resolution.
2. Prior to assembly, use the measuring tape to determine the accurate hanging height for the fixture. Select the necessary rod(s) to achieve the desired fixture height.
3. Thread the fixture wires through the tube (B) and selected rods (C) in sequence, then through the canopy (E).
4. Attach the tube (B) to the fixture body (A), ensuring not to pinch any wires. Following this, connect rods (C) to the top of the tube (B), securing firmly but cautiously to avoid over-tightening or cross-threading.
5. Attach the rod (C) top ends securely inside the canopy (E). Double-check that all connections are stable.

Installation Instructions

1. Using a voltage tester, ensure no power is running through the junction box. Ensure the junction box is structurally secure and without any exposed wires.
2. Securely fasten the mounting bracket (H) to the ceiling junction box using the provided screws (F) from the spare parts bag.
3. **Wire Connection Steps:**
 - a. Locate the wire connectors (I) supplied with the fixture.
 - b. Attach the fixture's ground wire to the green screw on the mounting bracket (H). To do this, wrap the ground wire clockwise around the green screw, ensuring that the wire is securely in contact with the screw. Tighten the screw firmly to hold the ground wire in place. **Make sure that there is enough excess ground wire to allow for a secure connection to the house's ground wire.**
 - c. Take the house wire end and the fixture wire end, black (hot) to black (smooth), white (neutral) to white (ribbed), and green/bare copper (ground) to bare copper (ground). ensuring a tight, fully insulated connection.
 - d. Align the two ends and insert them together into the wire connector (I). Once they are in place, twist the connector (I) until it feels tight. A good indication of secure connection is when the wires remain

- connected when tugged lightly. Repeat the process for each wire pair.
4. Gently raise the fixture, aligning it with the mounting bracket (H). Secure it using the provided mounting screws (G) and ball nuts (D). Hide any visible wiring properly.
5. Once the fixture is secure, carefully screw in the light bulbs, ensuring not to exceed the recommended wattage.
6. Attach the remaining lampshades to the fixture body (A) as directed. Make sure they are hooked and placed evenly.
7. Restore power at the breaker and maintain a safe distance from the fixture until it's confirmed to be functioning correctly. This measure is necessary for maintaining safety during the post-installation phase.

Friendly Reminder

1. When installing your new chandelier, it's perfectly normal if the chandelier initially appears uneven. Given the unique nature of the materials used, some slight variances are normal and add to the uniqueness of your piece. Please feel free to gently adjust the shades to achieve a harmonious balance.
2. If you encounter any difficulties during the installation process, never hesitate to seek assistance, we're committed to ensuring your installation process is as smooth and successful as possible.

Maintenance Instructions

1. Inspect the chandelier periodically for any loose connections or signs of wear and tear. Secure any loose parts and replace worn out components promptly to enhance its longevity.
2. Clean with a soft, dry cloth, a feather or microfiber duster. Avoid using liquid cleaners or abrasive materials.
3. When replacing bulbs, ensure the chandelier is switched off and cooled down before handling. Use bulbs of appropriate wattage to prevent heat damage.
4. This chandelier is intended for indoor and dry conditions only. Exposure to outdoor or moist environments can lead to damage.