


INSTALLATION MANUAL CHANDELIER

Model No.: JTP002WFG-15A / JTP002BL-15A

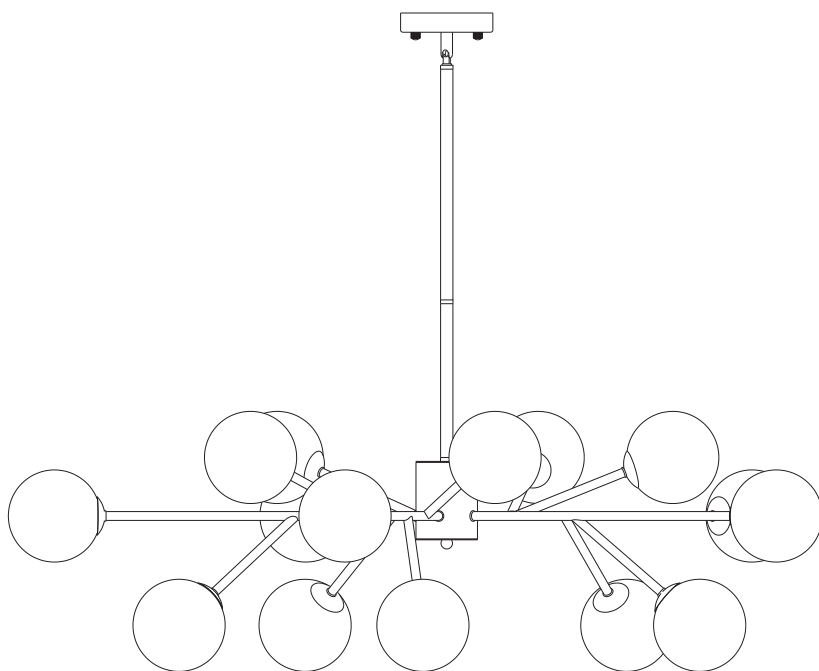

Scan for Installation Video

Safety Rules

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS

CAUTION: Before assembling the lighting fixture, refer to the section titled Wiring Connections. If you feel you do not have enough electrical wiring experience, either refer to a do-it-yourself wiring handbook or have your lighting fixture installed by a qualified, licensed electrician.


INSTALLATION & OPERATION INSTRUCTIONS GENERAL

Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.


All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Installation Preparation


Tools You Need




☒ Ladder




☒ Pliers




☒ Wire Strippers



☒ Screwdrivers



☒ Wrench



☐ Power Drill
(optional)




☐ Drill Bit
(optional)

What to Expect with your Installation




☒ Check the box to see the weight of the light



☒ Angled ceiling applicable

Packing List

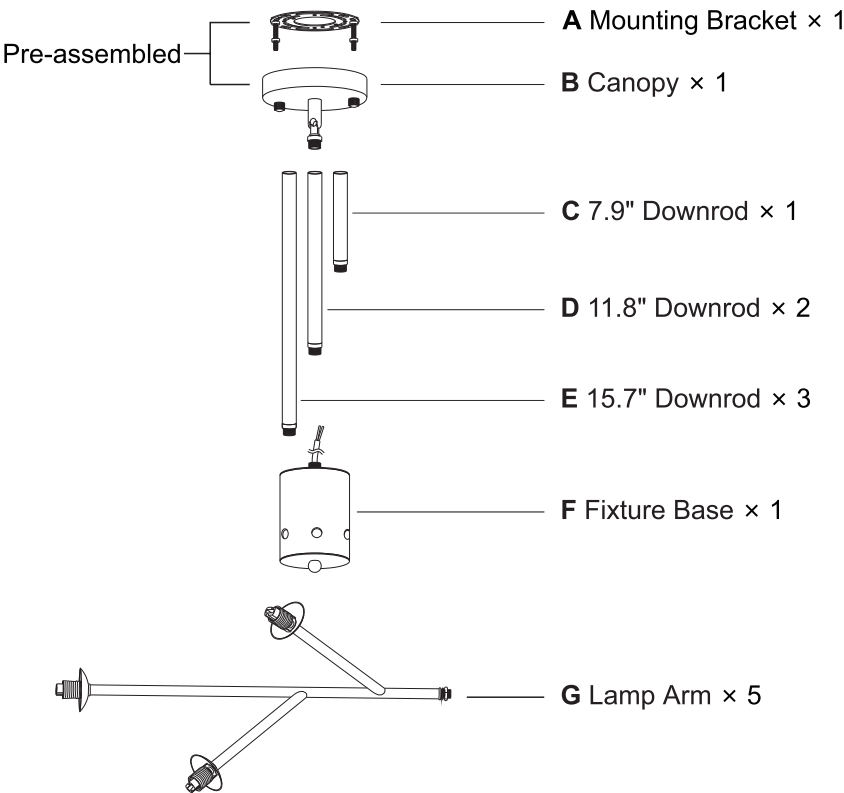

Installation Kit


AA	11x	BB	2x	CC	4x	DD	4x	EE	4x
									
Wire Nut		Outlet Box Screw		Wood Screw		Washer		Plastic Anchor	
FF	15x	GG	3x	HH	3x	JJ	1x		
									
Glass Shade		White Wire		Black Wire		Gloves			

- NOTE:
- 1. The listed quantity is for installation, extra hardware may be included.
 - 2. The mounting bracket (A) is pre-assembled on the canopy (B).

Installation Instructions

1. Remove the Mounting Bracket


Loosen the knurled nut from the canopy (B), and take out the mounting bracket (A).

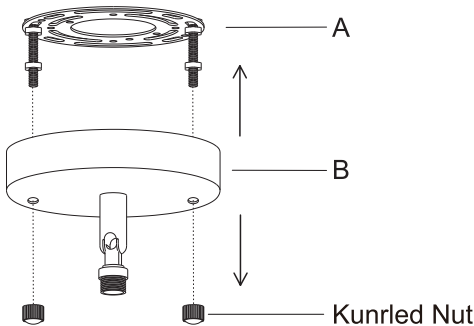

2. Mount the Bracket (3 Options)


Option1. (For Outlet Box)

Secure the mounting bracket (A) to the outlet box with screws taken off from outlet box or screws (BB) and washers (DD) provided.

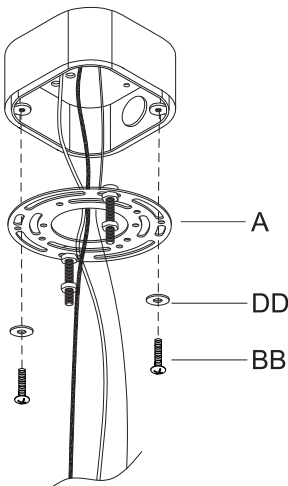


Option 2. (For Solid Wood Structure)

Mark and drill the screw holes on the solid wood structure. Mount the mounting bracket with wood screws (CC) and washers (DD).

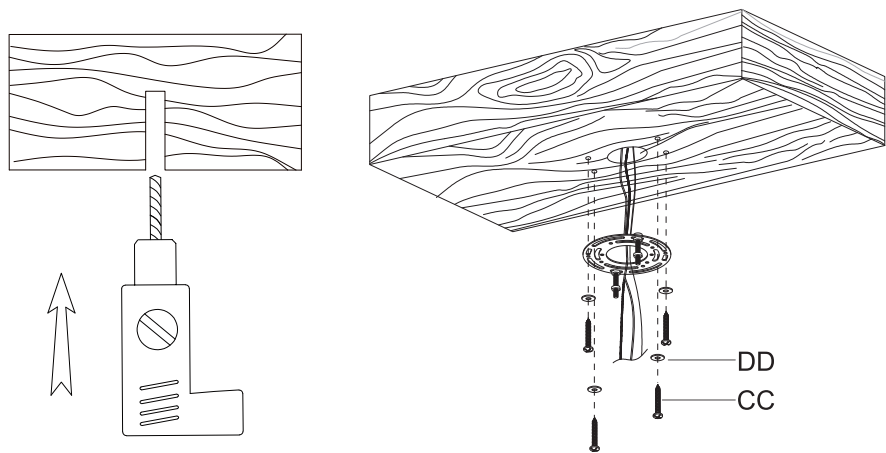


Option 3. (For Concrete Structure)

Mark and drill the anchor holes on the concrete structure, and then insert the plastic anchors (EE). Mount the mounting bracket to the concrete structure with wood screws (CC) and washers (DD).

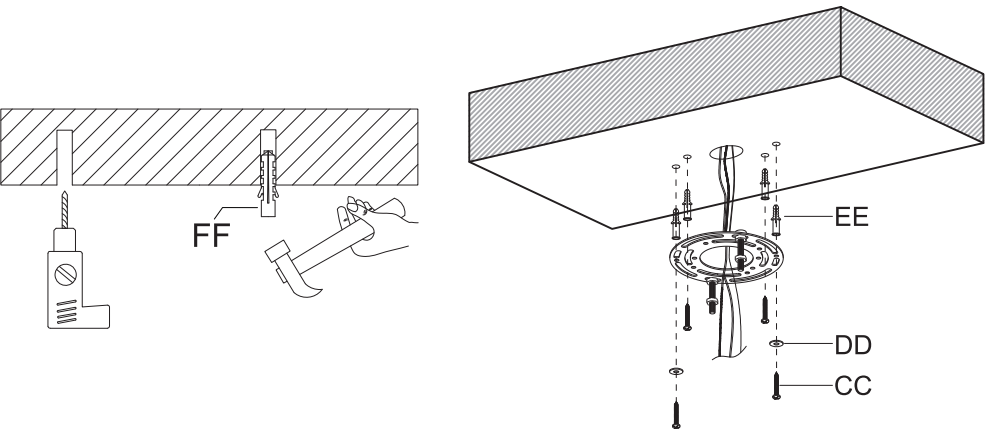


3. Install the Lamp Arm


Step 1: Remove the dome nut on fixture base (F) and then take off the fixture cover, the fixture body and the center rod.

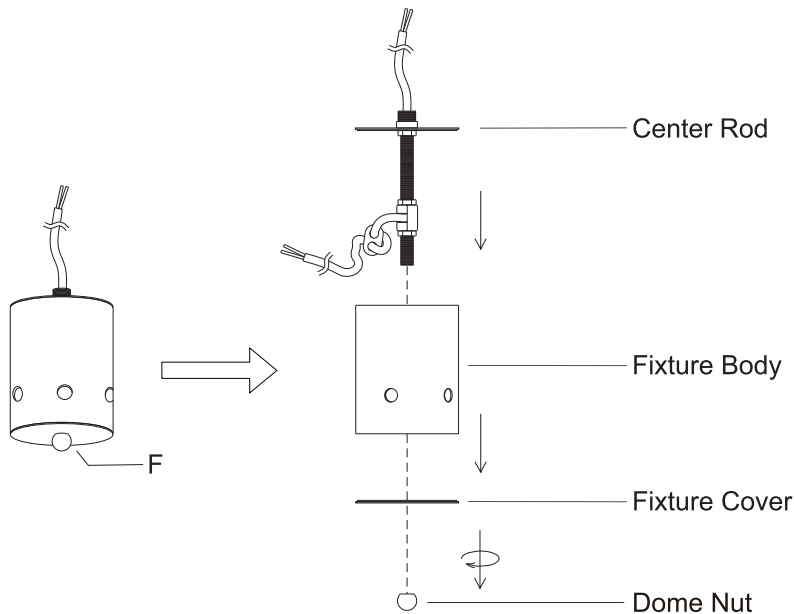


Step 2: Cut the cord tie with scissors, then remove the hex nut and washer of lamp arm (G).

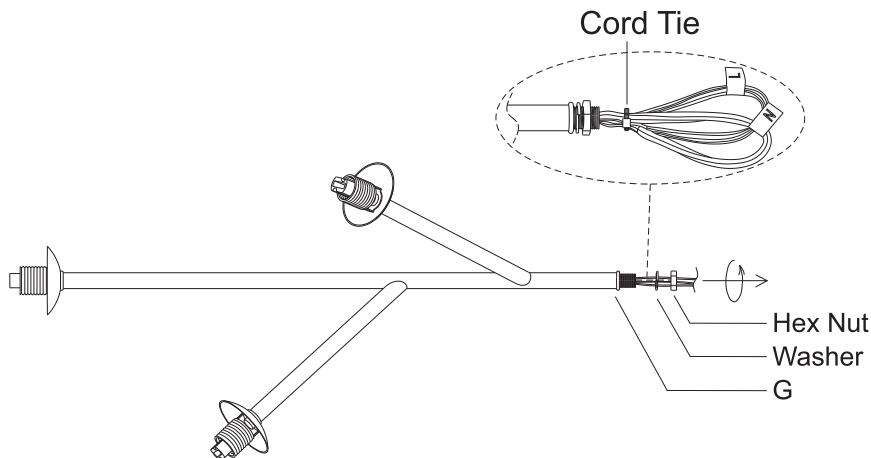

Step 3: Attach the lamp arm (G) onto the fixture body and secure it with the removed washer and hex nut. Install the five lamp arms one at a time to complete assembly.

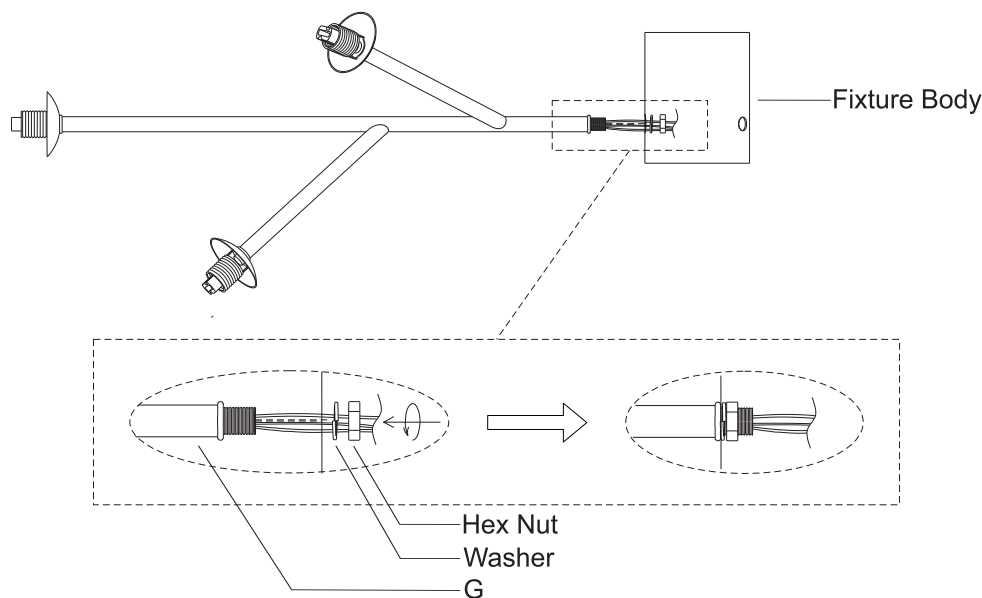


Step 4: Thread the center rod through the fixture body.

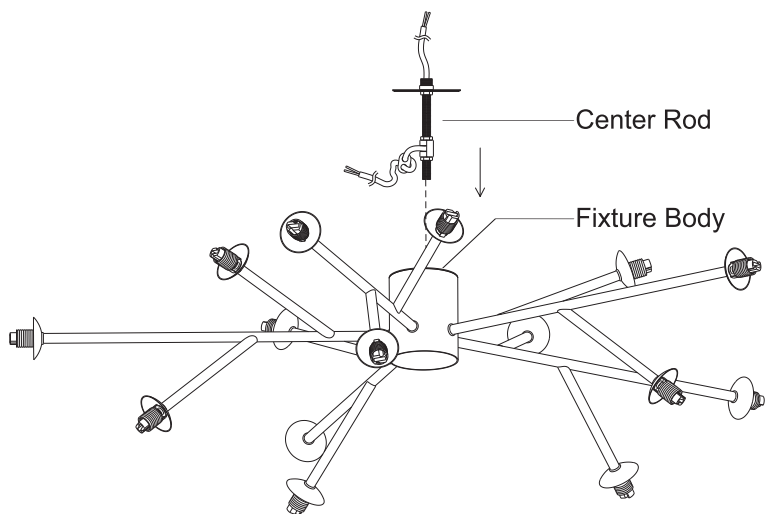


Step 5: Divide the 15 neutral wires (white) from lamp arms into 3 groups of 5 wires each. Connect each group to white wire (GG) with wire nut (AA).

Step 6: Divide the 15 hot wires (black) from lamp arms into 3 groups of 5 wires each. Connect each group to black wire (HH) with wire nut (AA).

Step 7: Connect the wire (GG/HH) to fixture base wire with wire nut (AA). (black to black, white to white).

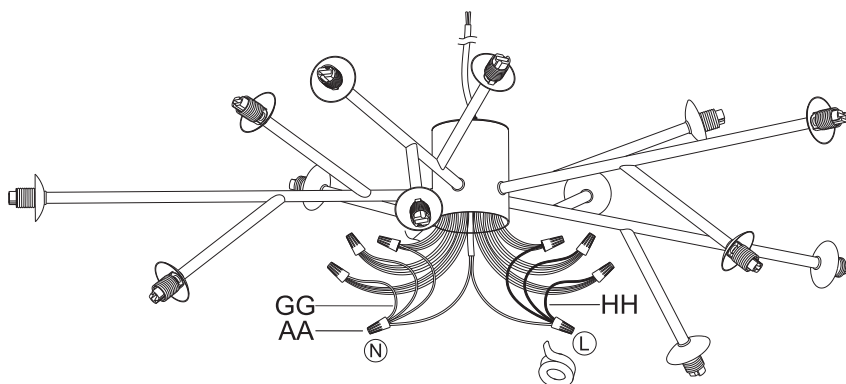


Step 8: Fix the fixture cover to the fixture body with dome nut.

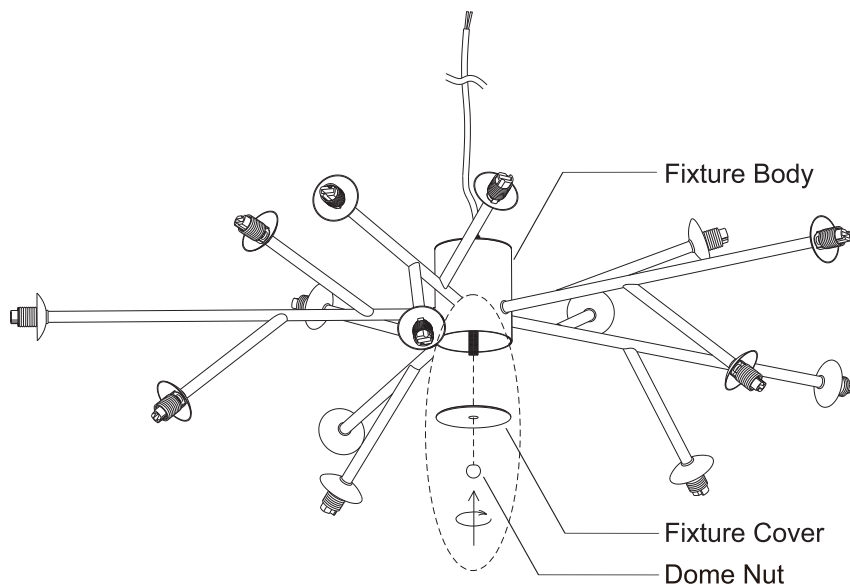

4. Install the Downrod


Step 1: Thread the supply wire through the downrod (C or D or E) and canopy (B).

Step 2: Secure the canopy (B) to the downrod (C or D or E), then attach them to the fixture base (F).

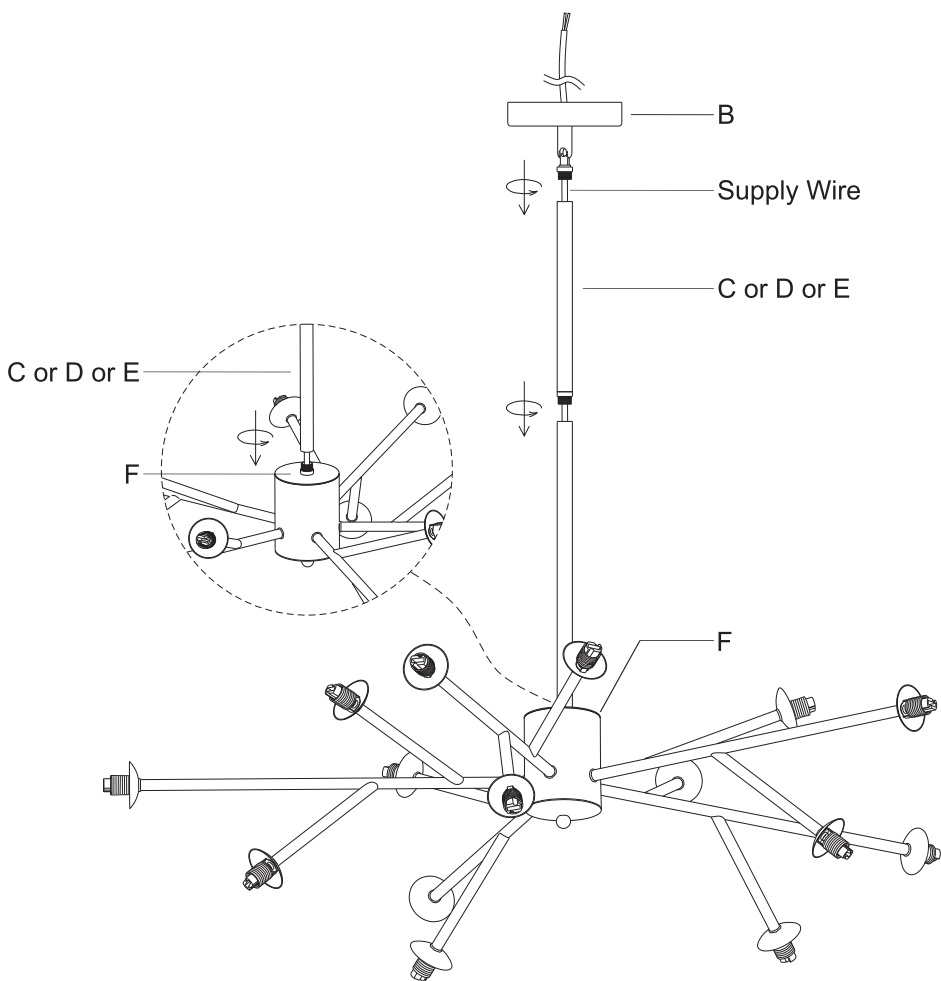


5. Connect the Wires

Connect the wires from the fixture to the house supply wires with small wire nuts (AA), ground wire (green, green / yellow, or bare copper) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electrical tape.

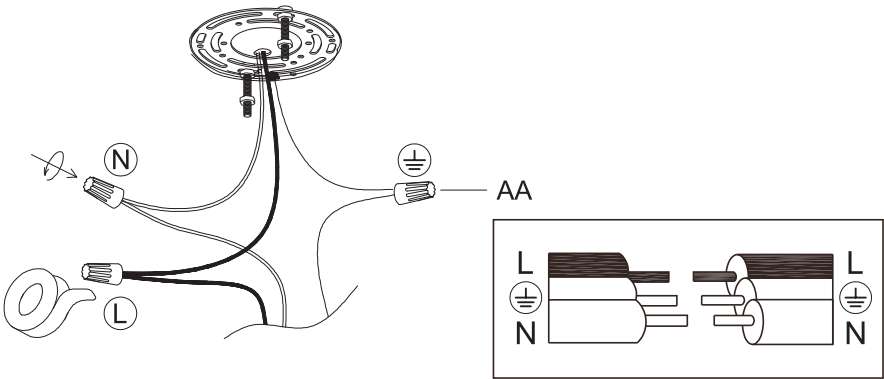


6. Fix the Canopy

Attach the canopy (B) to the mounting bracket (A), then secure with knurled nuts.

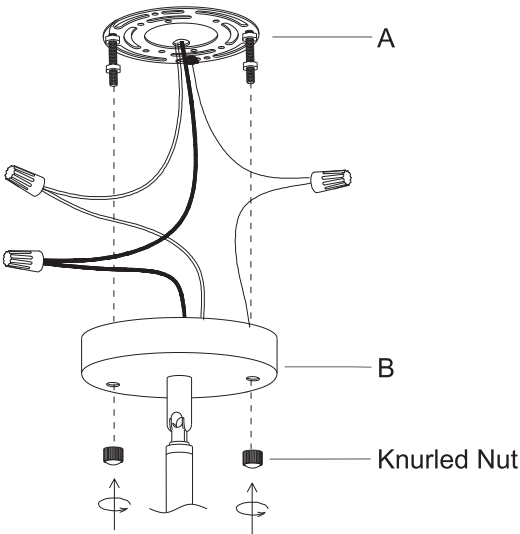

7. Install the Bulb

Install Bulbs (Only for G9 LED Bulbs x 15, max 7W each, not included).

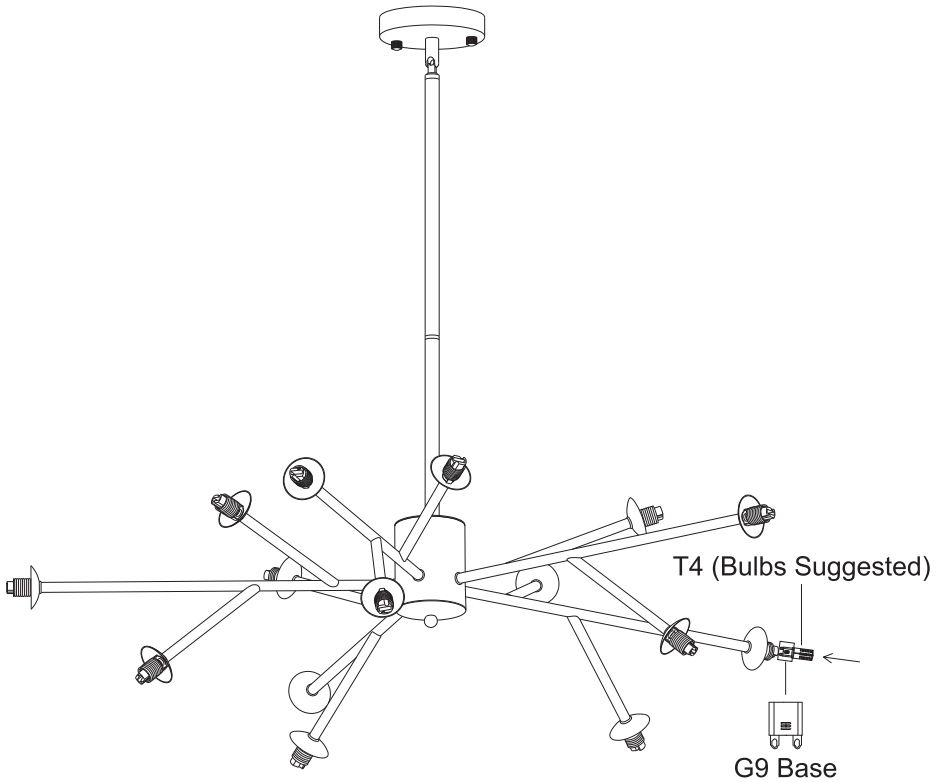


NOTE:

1. The illustrated bulb is recommended and compatible alternatives may be selected as needed.
2. To achieve dimming functionality, you need to use dimmable bulbs and a dimmer switch.
3. For bulbs with color temperature control, repeatedly switch “on” and “off” using the wall switch to change settings.

8. Install the Glass Shade

Install the glass shade (FF) on the socket.

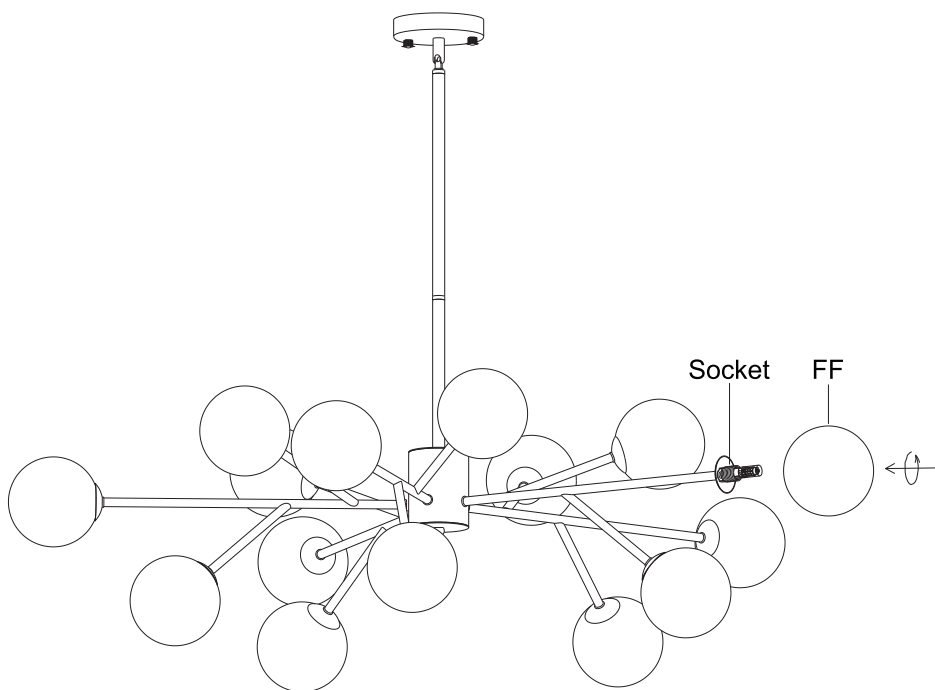

Trouble Shooting

1. Missing / Broken Parts

- Make a list of the missing/broken parts according to the packing list, take photos for broken parts, then email us for free replacements.

2. Bulbs Do Not Light Up

- Check your power and switch to make sure it's power on.
- For regular bulbs, make sure it is connected to the ON/OFF wall switch, not the dimmer switch.
- Replace the bulb with a new one.

3. Bulbs Flicker

- If it is a dimmer switch, use a dimmable bulb.
- Replace the bulb with a new one.

4. Could Not Install / Assemble

- Take photos of the ceiling / fixture, contact seller for technical support.

Clean And Care

To clean, wipe the fixture with a soft cloth. Spraying from chemical cleaners can discolor the finish of the fixture.

Do not use scouring pads, powders, steel wool, or abrasive paper to clean this fixture.

Ordering Parts

Keep this manual for future reference, and in case replacement parts are needed. Available parts can be ordered from the place of purchase. Use exact wording from diagrams when ordering parts.