
PARTS INCLUDING

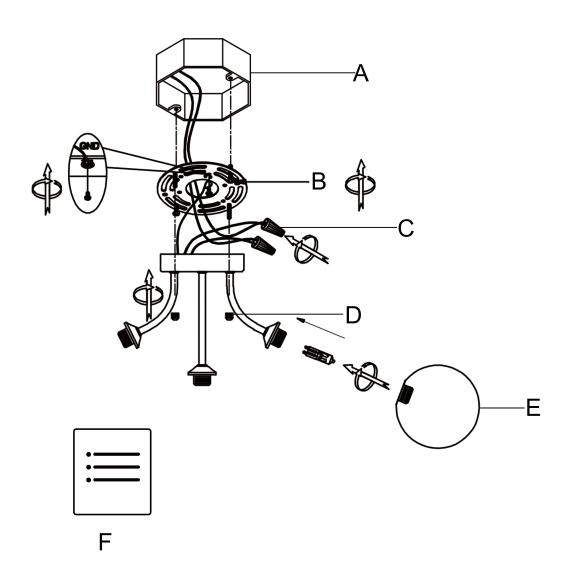

PARTS TYPE & QTY INCLUDING

A: junction box B: hanging board *1

C: wiring cap *2 D: cylindrical screw *2


E: glass lampshade *5 F: instruction *1

ASSEMBLY&INSTALLATION INSTRUCTIONS

- Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.
- Turn off power Before you start the installation NEVER attempt any work without shutting off the electricity until the work is done.
- Go to the main fuse, or circuit breaker box in your home.
- Place the main power switch in the "OFF" position.
- Place the wall switch in the "OFF"

Connect wires as below wires connection shown.


PLEASE NOTE THAT GROUNDWIRE IS BARE COPPER WIRENERVER CONNECT OTHER WIRES TO GOUND WIRES

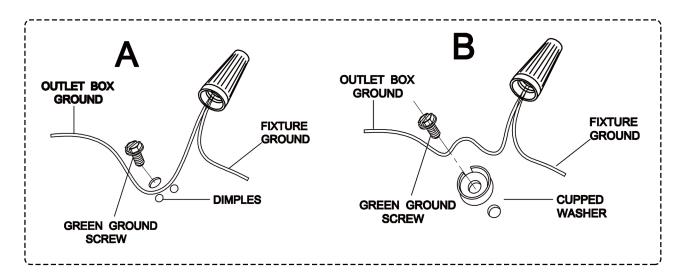

- Twist wires together with plastic wire connectors **(B)** until tightly joined.
- Wrap each connector with approved electrical tape.
- Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.


INSTALLATION STEPS

1.




Unfold the lamp body, and adjust the distance between each pole.


2.




Use 2 long screws to install the hanging board in the junction box.

3.








Wire the device by matching the colors of the wires. A total of 3 wires: Live wire, Neutral wire, and Ground wire. Cover the connection by tightening the wiring cap. To advoid electric shock, please do not let the copper wire expose.


Install the lamp base on the hanging board and tighten them with the short screws on the left and right sides.

6.




Install 5 G9 bulbs

(Note: bulb is not included).



Install the glass lampshades on the lamp holders.





Turn on the power switch and check whether the lamp works normally.