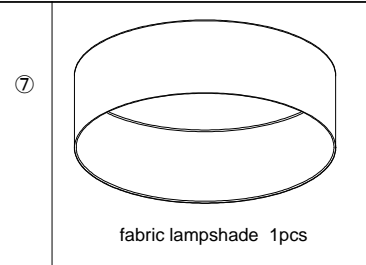


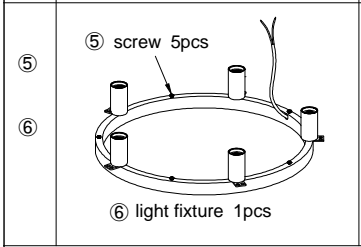
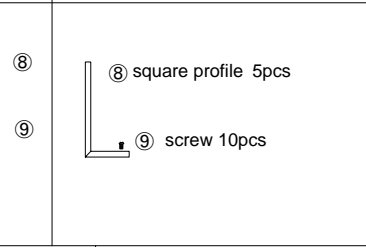


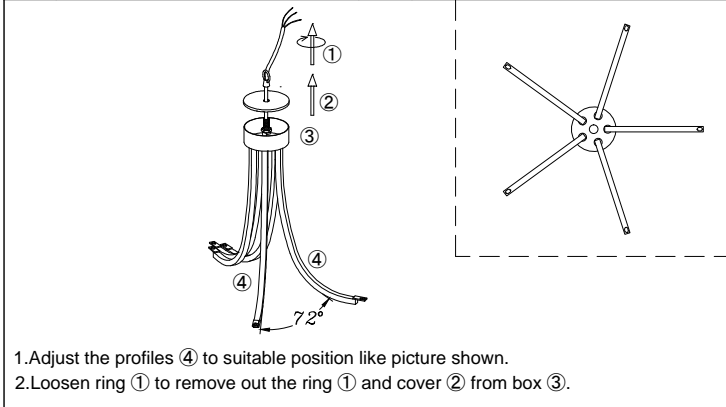
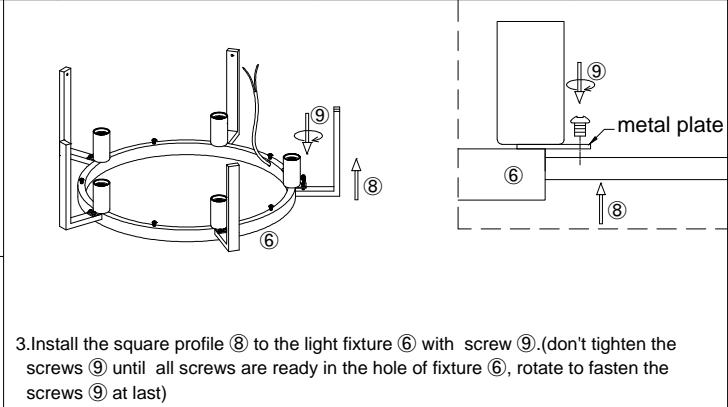
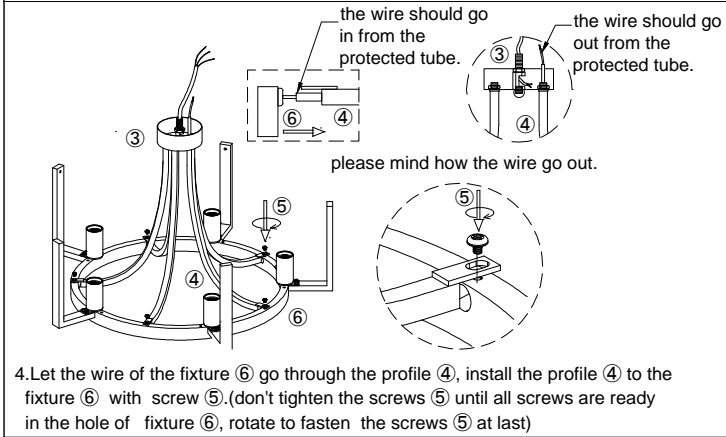
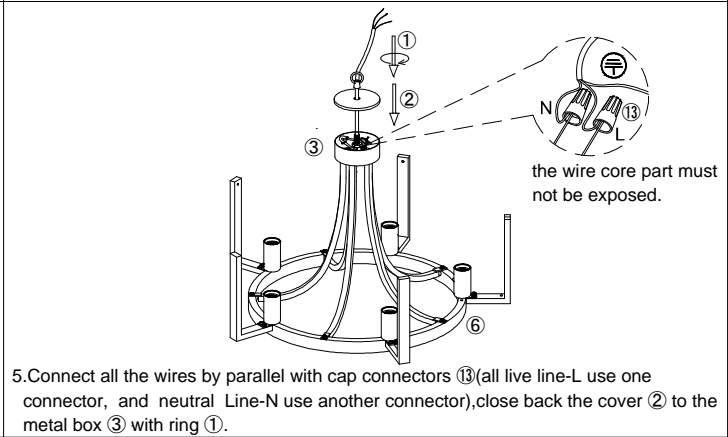
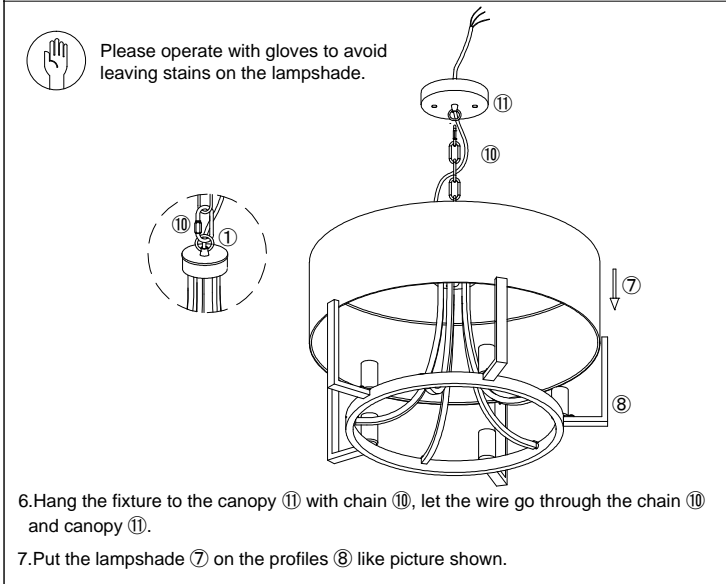
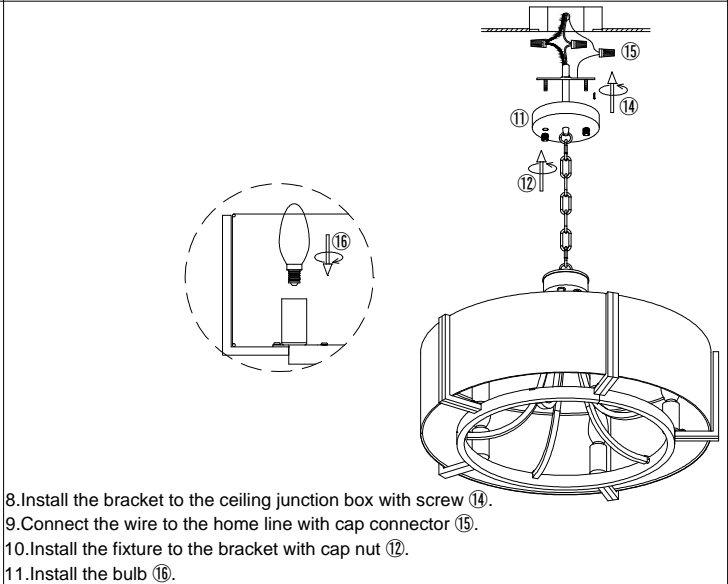
 <p>① hanging ring ② cover ③ metal box ④ metal bended profile</p>	 <p>⑦ fabric lampshade 1pcs</p>	 <p>⑩ chain 1pcs</p>	 <p>⑬ cap connector 3PCS</p>	<p>⚡ X 3PCS ⚡ X 3PCS</p>
 <p>⑤ screw 5pcs ⑥ light fixture 1pcs</p>	 <p>⑧ square profile 5pcs ⑨ screw 10pcs</p>	 <p>⑪ canopy 1pcs ⑫ cap nut 2pcs</p>	 <p>X 1PCS</p>	<p>⚡ X 3PCS ⚡ X 3PCS</p>
 <p>1. Adjust the profiles ④ to suitable position like picture shown. 2. Loosen ring ① to remove out the ring ① and cover ② from box ③.</p>		 <p>3. Install the square profile ⑧ to the light fixture ⑥ with screw ⑨. (don't tighten the screws ⑨ until all screws are ready in the hole of fixture ⑥, rotate to fasten the screws ⑨ at last)</p>		
 <p>the wire should go in from the protected tube. the wire should go out from the protected tube. please mind how the wire go out.</p> <p>4. Let the wire of the fixture ⑥ go through the profile ④, install the profile ④ to the fixture ⑥ with screw ⑤. (don't tighten the screws ⑤ until all screws are ready in the hole of fixture ⑥, rotate to fasten the screws ⑤ at last)</p>		 <p>5. Connect all the wires by parallel with cap connectors ⑬ (all live line-L use one connector, and neutral Line-N use another connector), close back the cover ② to the metal box ③ with ring ①. the wire core part must not be exposed.</p>		
 <p>Please operate with gloves to avoid leaving stains on the lampshade.</p> <p>6. Hang the fixture to the canopy ⑪ with chain ⑩, let the wire go through the chain ⑩ and canopy ⑪. 7. Put the lampshade ⑦ on the profiles ⑧ like picture shown.</p>		 <p>8. Install the bracket to the ceiling junction box with screw ⑭. 9. Connect the wire to the home line with cap connector ⑮. 10. Install the fixture to the bracket with cap nut ⑫. 11. Install the bulb ⑯.</p>		
<p>Please read carefully before installation!!! Note : Please make sure that the electricity is powered off during installation ! Only a professional electrician should install this kind of product !</p>				