



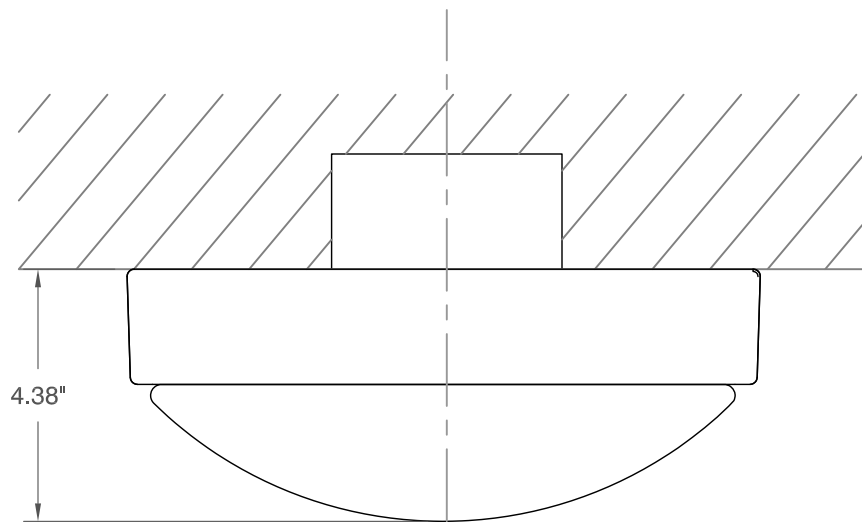

FRONT VIEW

Ø11.00"

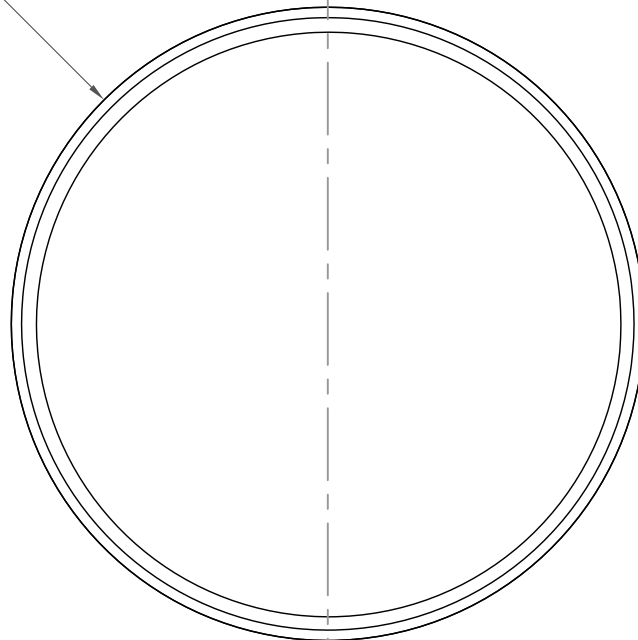

BOTTOM VIEW

ceiling mount

120v

277v

LAMPING

- o (1x) 8.2w LED Array
- o 3000K, 350mA
- o Initial Lumens: 1173 lm
- o Delivered Lumens: 594 lm
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

METAL FINISH

- o **24** - Satin Nickel

DIFFUSER

- o White Opal Glass (twist-fit)

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o Ø11" x 4.38"(h)

INSTALLATION

- o 4" Octagonal J-Box
- o ETL Dry/Damp Listed
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0



Sample Catalog Number

<u>Series #</u>	<u>Finish</u>	<u>Catalog Number</u>
------------------------	----------------------	------------------------------

PROJECT: _____

DATE: _____

