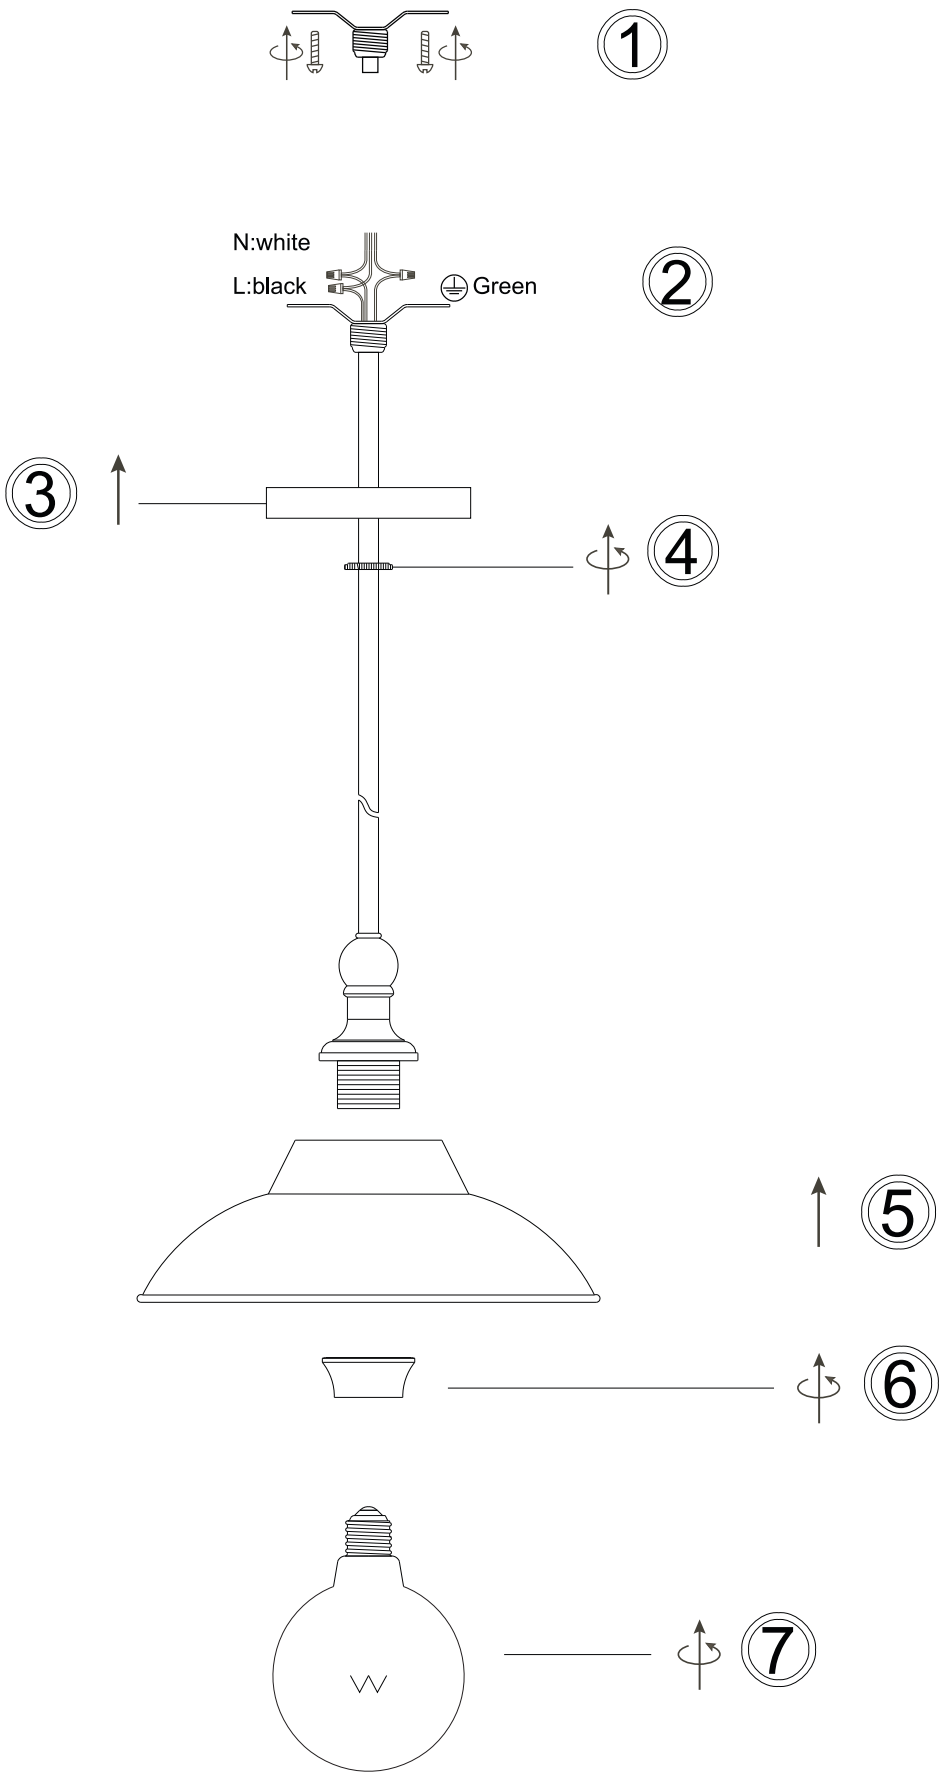


E26 Max 60W
Not included

Tresor Pendant Light Instruction

Safety Warning

- Shut off power at the circuit breaker before installation.
- Use a non-contact voltage tester to be sure the ceiling wires are not live.
- Fixture is rated for E26 Max 60W (1 bulb, not included).

Installation Steps

- **Step 1: Install the Ceiling Mounting Bracket**

  1. Locate the ceiling mounting bracket (component #1) from the package.
  2. Secure the mounting bracket to the ceiling junction box using the provided screws.
  3. Ensure the bracket is firmly attached and properly aligned.

- **Step 2: Make Hardwire Connections**

  1. Strip approximately ½ inch (13mm) of insulation from fixture and ceiling wires.
  2. Hot: Connect fixture black wire to house black (hot) wire; secure with wire nut.
  3. Neutral: Connect fixture white wire to house white (neutral) wire; secure with wire nut.
  4. Ground: Connect fixture green/bare wire to house ground wire; secure with wire nut.
  5. Carefully tuck all connected wires into the junction box.

- **Step 3: Install the Canopy**

  1. Raise the canopy (component #2) to the ceiling, aligning it with the mounting bracket.
  2. Secure the canopy in place using the provided hardware.
  3. Ensure the canopy is flush against the ceiling.
  3. Ensure the canopy is flush against the ceiling.

- **Step 4: Install and Measure the Rods**

  1. Determine your desired hanging height for the pendant.
  2. Attach the suspension rod components (#3 and #4) according to the diagram.
  3. Adjust the length as needed to achieve proper hanging height.

- **Step 5: Place the Shade**

  1. Carefully position the lamp shade (component #5) over the pendant assembly.
  2. Align it properly to ensure it hangs level and centered.

- **Step 6: Secure the Shade with the Ring**

  1. Attach the securing ring (component #6) to hold the shade in position.
  2. Tighten just enough to hold firmly; excessive force may damage the shade.

- **Step 7: Install the Bulb**

  1. Insert one E26 base bulb (Max 60W, not included) into the socket (component #7).
  2. Turn the bulb clockwise until securely seated in the socket.

Final Check

Restore power at the breaker panel and test the pendant light. The bulb should illuminate properly and the fixture should hang straight without wobbling.

Please contact us if you have any problems installing the lampshade. We will work you through the process.