


Assembly and Installation Instructions

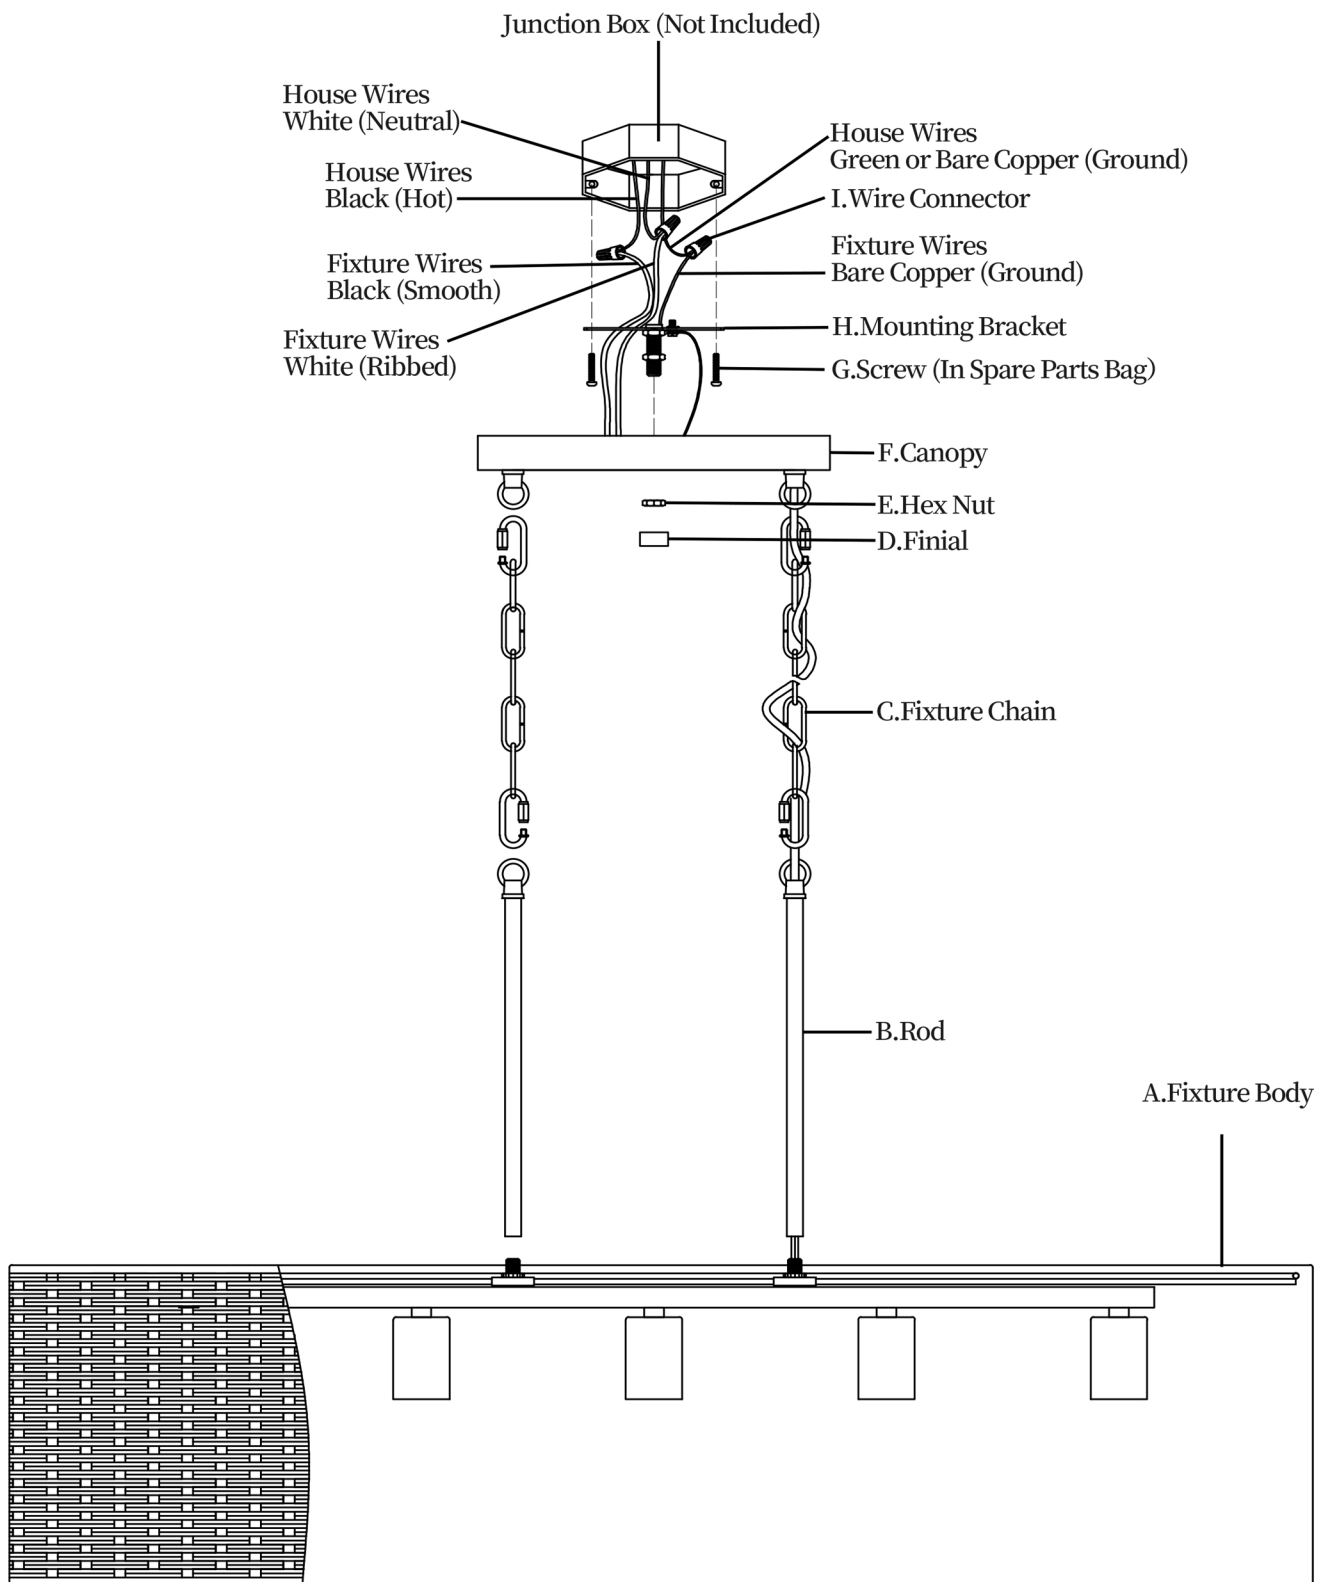

Warning

1. To prevent electrical shock, always turn off the power at the circuit breaker before installing or servicing this chandelier.
2. It's recommended to consult a professional electrician to ensure the branch circuit conductor is correct and for help with complex installations.
3. For added safety during installation, consider wearing appropriate protective gear such as gloves and safety glasses.
4. It's recommended to have an assistant for handling and securing the chandelier during installation.

Tools Required

Step ladder
Phillips head screwdriver
Pliers
Wire strippers
Voltage tester
Measuring tape (to adjust height)

Package Contents

Fixture Body x 1
Rod x 2
Fixture Chain x 2
Canopy x 1
Mounting Bracket x 1
Spare Parts Bag x 1
Assembly and Installation Instructions x 1

Product Specifications

5-Light Chandelier
Requires 5 medium base (E26) bulbs,
max 60W each (bulbs not included)
Voltage: 120V

Assembly Instructions

1. Carefully unpack the fixture, checking all parts for completeness and free of damage. If you find any missing or damaged parts, please reach out at your earliest convenience for a resolution.
2. Prior to assembly, use the measuring tape to decide on the desired length of the chain for optimal hanging height.
3. Pass the fixture wires through the rod (B) and the fixture chain (C), and then guide them through the canopy (F).
4. Secure the rod (B) to the fixture body (A), attaching one end of the fixture chain (C) to the rod (B) and the other end to the canopy (F).
Ensure the chain is properly hooked and secured to avoid any risk of the fixture falling. Taking care not to pinch any wires.
5. Loosen the finial (D) and the hex nut (E) to release the mounting bracket (H).

Installation Instructions

1. Using a voltage tester, ensure no power is running through the junction box. Ensure the junction box is structurally secure and without any exposed wires.
2. Securely fasten the mounting bracket (H) to the ceiling junction box using the provided screws (G) from the spare parts bag.

3. Wire Connection Steps:

- a. Locate the wire connectors (I) supplied with the fixture.
 - b. Attach the fixture's ground wire to the green screw on the mounting bracket (H). To do this, wrap the ground wire clockwise around the green screw, ensuring that the wire is securely in contact with the screw. Tighten the screw firmly to hold the ground wire in place. **Make sure that there is enough excess ground wire to allow for a secure connection to the house's ground wire.**
 - c. Take the house wire end and the fixture wire end, black (hot) to black (smooth), white (neutral) to white (ribbed), and green/bare copper (ground) to bare copper (ground).
 - d. Align the two ends and insert them together into the wire connector (I). Once they are in place, twist the connector (I) until it feels tight. A good indication of secure connection is when the wires remain connected when tugged lightly. Repeat the process for each wire pair.
4. Cautiously lift the canopy (F), aligning it with the mounting bracket (H). Secure it using the finial (D) and the hex nut (E). Conceal any exposed wiring properly.
 5. Once the chandelier is secure, carefully screw in the light bulbs, ensuring not to exceed the recommended wattage.
 6. Restore power at the breaker and maintain a safe distance from the fixture until it's confirmed to be functioning correctly. This measure is necessary for maintaining safety during the post-installation phase.

Friendly Reminder

If you encounter any difficulties during the installation process, never hesitate to seek assistance, we're committed to ensuring your installation process is as smooth and successful as possible.

Maintenance Instructions

1. Inspect the chandelier periodically for any loose connections or signs of wear and tear. Secure any loose parts and replace worn out components promptly to enhance its longevity.
2. Clean with a soft, dry cloth, a feather or microfiber duster. Avoid using liquid cleaners or abrasive materials.
3. When replacing bulbs, ensure the chandelier is switched off and cooled down before handling. Use bulbs of appropriate wattage to prevent heat damage.
4. This chandelier is intended for indoor and dry conditions only. Exposure to outdoor or moist environments can lead to damage.