



FOR REPLACEMENT PARTS OR HELP WITH

ASSEMBLY PLEASE CONTACT US

PLEASE ENSURE TO HAVE THE MODEL #

FROM THE PACKAGING OR INSTRUCTION BOOKLET

TO RETURN THE PRODUCT:

PLEASE CONTACT THE RETAILER

WHERE THE ITEM WAS PURCHASED FROM

**IMPORTANT**: Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

#### **SAFETY INFORMATION**

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

**WARNING**: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.


May require 2 people for ease of assembly.


#### **CARE and MAINTENANCE**


To clean, use a soft or slightly damp cloth, then wipe with a clean, dry cloth. Dust with soft dry cloth.

Do not use ammonia-based cleaning products, as they will damage the finish. Do not leave liquids or damp cloths on this furniture.


To avoid dulling of the finish, do not place furniture in direct sunlight. Please inspect and tighten all screws or bolts on a regular basis to ensure proper performance and safety of your item.

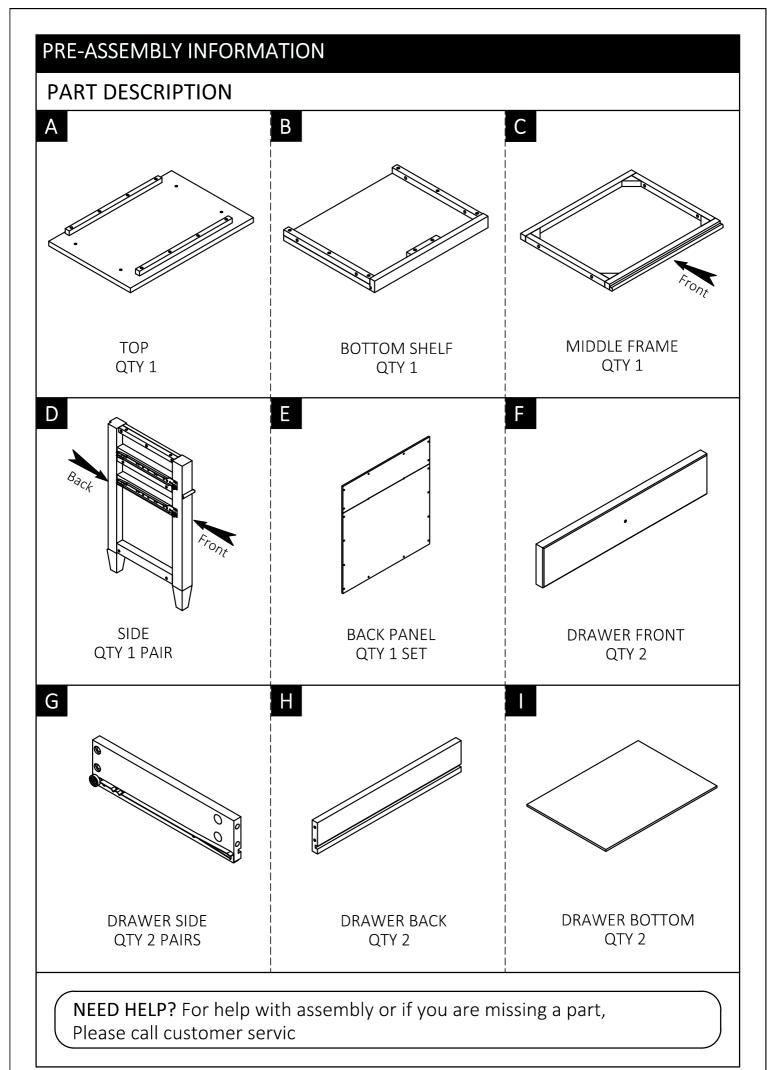

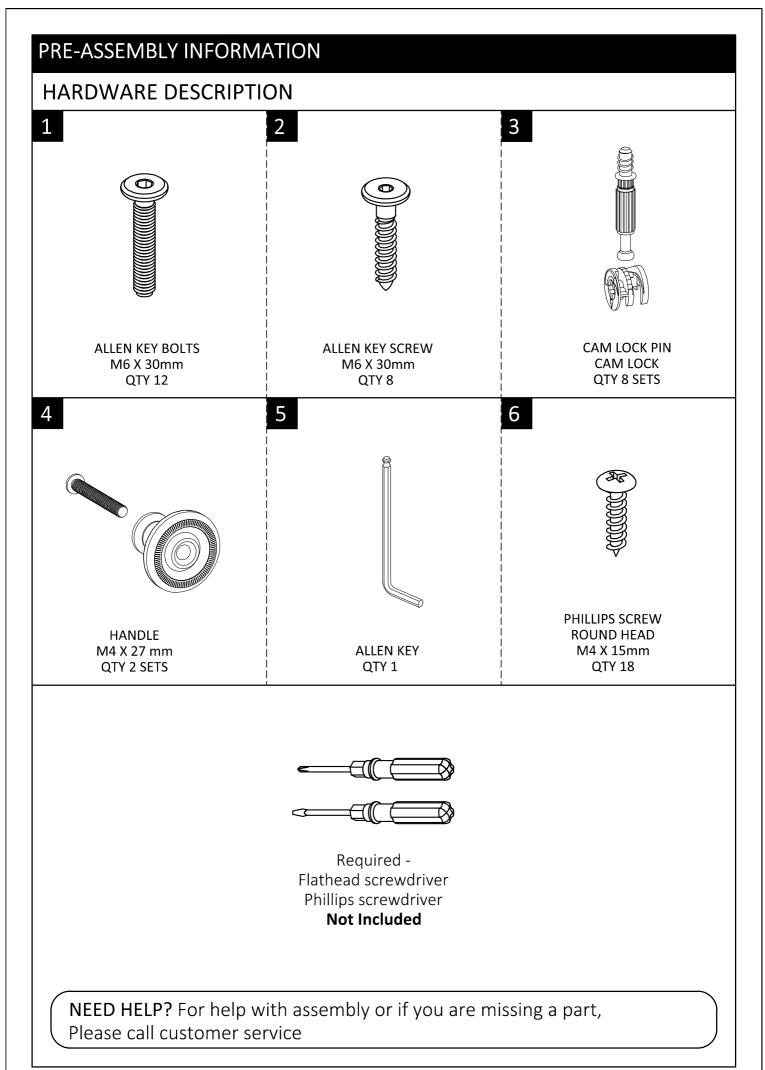

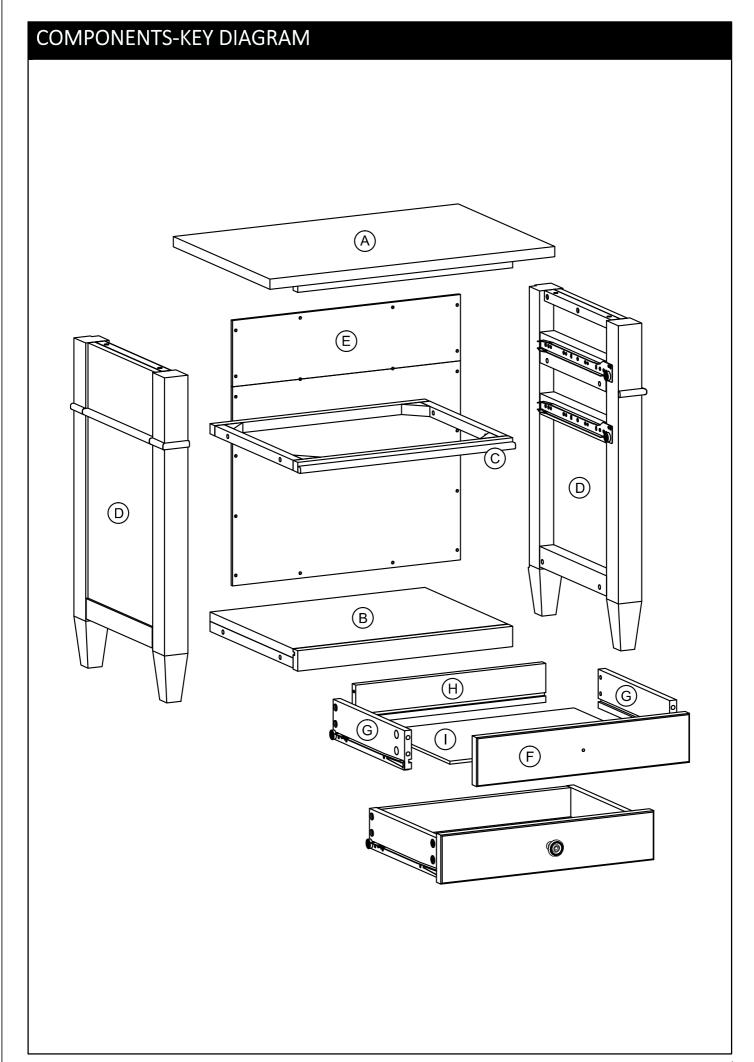


#### STEP-1

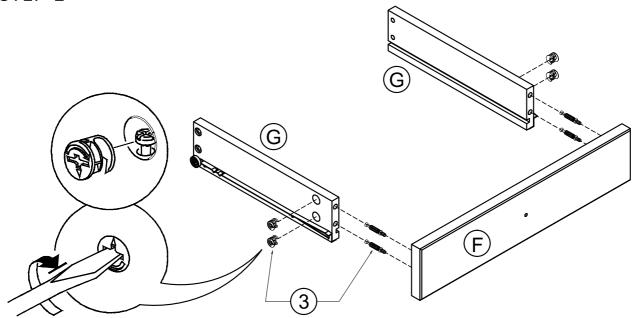


- 1. Attach 4 Cam Lock Pins 3 to pre-drilled holes at back of Drawer Front F.
- 2. Align Cam Lock Pins with pre-drilled holes and attach Drawer Sides (G).
- 3. Insert 2 Cam Locks (3) into pre-drilled holes on each Drawer Side (6).
- 4. Use flathead screwdriver secure Cam Locks.

#### STEP-2

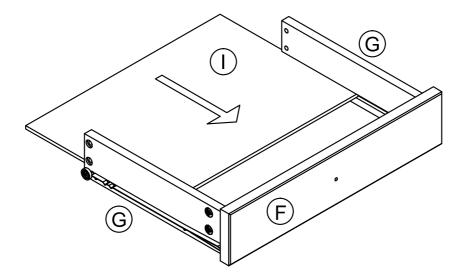


1. Slide Drawer Bottom firmly into slots on Drawer Sides G and Drawer Front F.

STEP-3

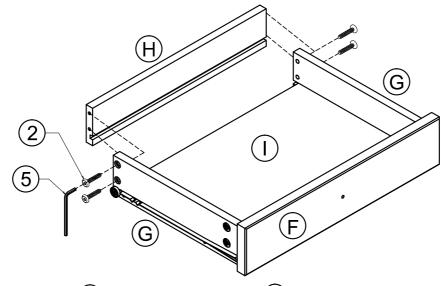


- Align Drawer Back (H) with Drawer Bottom (Dand press firmly into slot .
   Attach Drawer Back using 2 Allen Key Screws (2) through pre-drilled holes on each Side (G).
- 3. Use Allen Key (5) to tighten screws. Do not over-tighten.


STEP-4




1. Use Phillips screwdriver to attach Handle 4 to Drawer Front (F).

Repeat Step 1-4 for the second drawer.




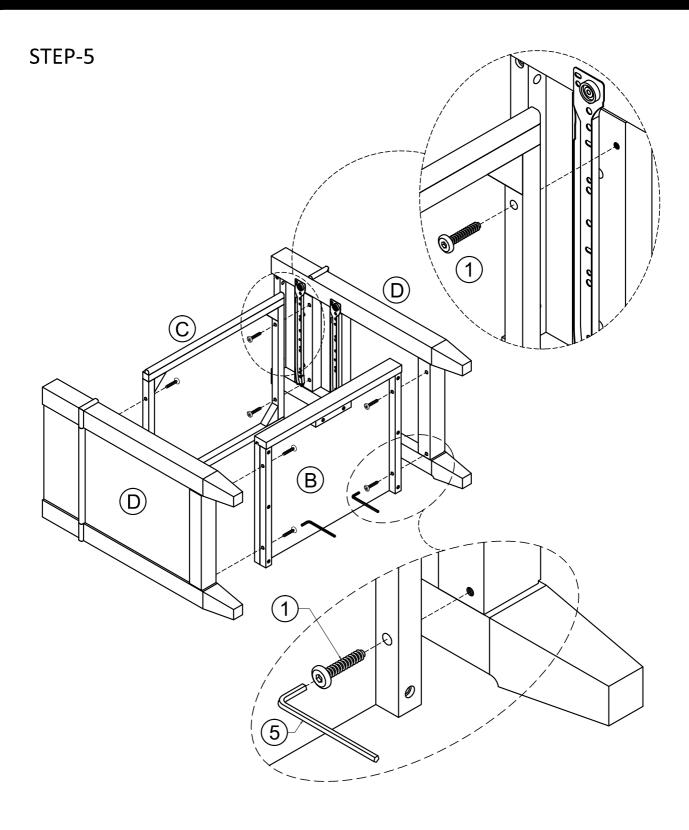

- Attach Bottom Shelf (B) and Middle Frame (C) to Sides (D) using 8 Allen Key Bolts (1) (4 Bolts / each Side).
   Use Allen Key (5) to tighten bolts. Do not over-tighten.

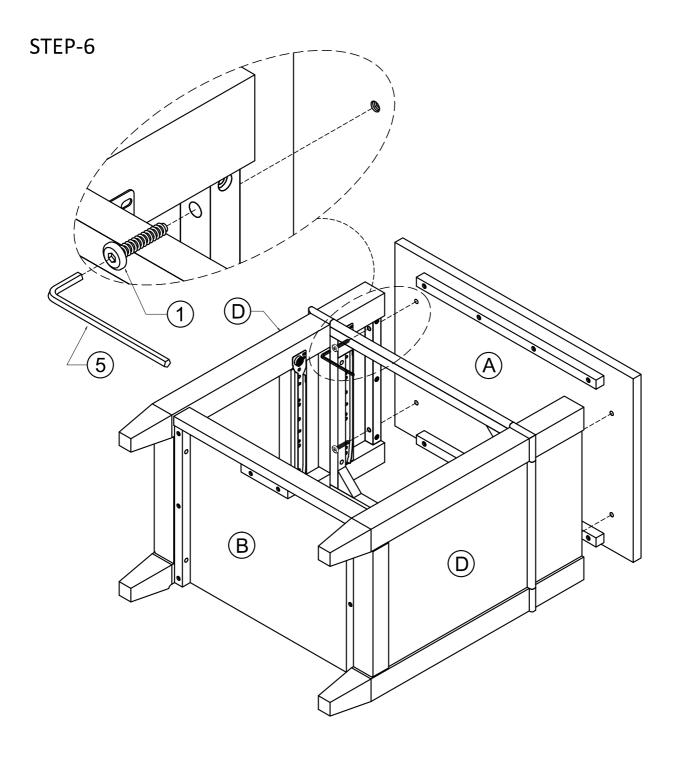


- 1. Attach Top (A) to Sides (D) using 4 Allen Key Bolts (1) (2 Bolts / each Side).
  3. Use Allen Key (5) to tighten screws and bolts. Do not over-tighten.

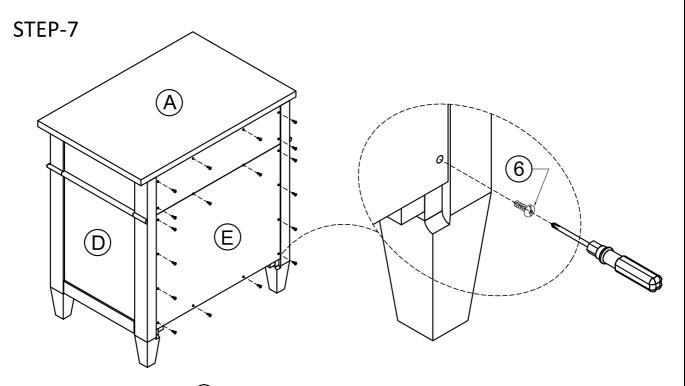

- 1. Attach the Back Panel (E) to back frame of cabinet using Phillips Screws Round Head (6) through pre-drilled holes.
- 2. Use Phillips screwdriver to tighten screws.



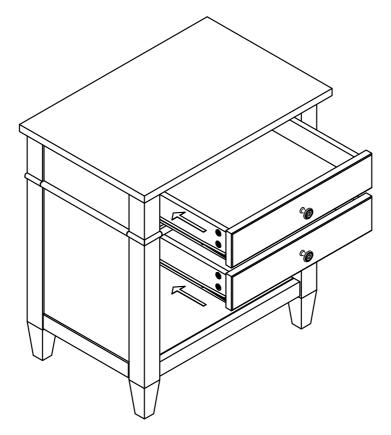

1. Insert assembled drawers into glides on assembled table.

#### **WARRANTY**

Thank you for purchasing our product.

These products have been made to demanding, high-quality standards and are guaranteed for domestic use against manufacturing faults for a period of 12 months from the date of purchase. This warranty does not affect your statutory rights.

In case of any malfunction of your product (failure, missing parts, etc.)

We reserve the right to repair or replace the defective product, at its discretion.

This product is guaranteed for 12 months if used for normal purposes. Any warranty is invalid if the product has been overloaded or subject to neglect, improper use or an attempted repair by other than an authorized agent. Heavy-duty or daily professional/commercial usage are not guaranteed.

Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.