



TEST REPORT

Reference No...... : WTX26F06157040Q
Applicant..... : Dreamlily (Shenzhen) E-Commerce Co., Ltd.
Address..... : Room 1302, Building T2, Lijincheng Center, Yousong
Community, Longhua Street, Longhua District, Shenzhen
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Smart Toilet
Model No...... : OPT11
Test specification..... : STANDARD FOR SAFETY
Personal Hygiene and Health Care Appliances
UL 1431:2011 Ed.3+R:Jun20, 2019
Date of Receipt sample : 2026-05-06
Date of Test : 2026-05-06 to 2026-06-11
Date of Issue..... : 2026-06-25
Test Report Form No. : WSL-6059821A-04B
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink Machinery City, Xingye 4 Road, Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail: info@waltek.com.cn

Tested by:

PH Yuan
PH Yuan

Approved by:





Test item description: Smart Toilet

Trade Mark: N/A

Model/Type reference: OPT11

Ratings: 120V, 60Hz, 735W

Copy of marking plate:

Smart Toilet

Model: OPT11

120V, 60Hz, 735W

Warning:

READ ALL INSTRUCTIONS BEFORE USING

HOUSEHOLD USE ONLY

DO NOT IMMERSE IN WATER

CONFORMS TO UL STD.1431

Model Similarity:

N/A

Summary of testing:

1. These samples are tested and complied with the requirements of standards listed on this report.
2. Full tests were performed on model OPT11.

General Remark:

N/A



UL 1431			
Clause	Requirement	Result - Remark	Verdict
1	Scope		
2	Glossary		
3	Components		P
3.1	General		P
3.2	Attachment Plugs, Receptacles, Connectors, and Terminals		P
3.3	Batteries and Battery Chargers		N
3.4	Boxes and Raceways		N
3.5	Capacitors and Filters		N
3.6	Controls		P
3.6.1	General		P
3.6.2	Electromechanical and Electronic Controls		P
3.6.3	Liquid Level Controls		P
3.6.4	Motor and Speed Controls		P
3.6.5	Pressure Controls		P
3.6.6	Temperature Controls		P
3.6.7	Timer Controls		N
3.7	Cords, Cables, and Internal Wiring		P
3.8	Cord Reels		N
3.9	Film-Coated Wire (Magnet Wire)		N
3.10	Gaskets and Seals		P
3.11	Ground-Fault, Arc-Fault, and Leakage Current Detectors / Interrupters		P
3.12	Heaters, Heating Elements and Pads		P
3.13	Insulation Systems		N
3.14	Light Sources and Associated Components		N
3.15	Marking and Labeling Systems		N
3.16	Motors and Motor Overload Protection		N
3.17	Overcurrent Protection		N
3.18	Polymeric Materials and Enclosures		P
3.19	Power Supplies		N
3.20	Printed Wiring Boards		P
3.21	Semiconductors and Small Electronic Components		P
3.22	Supplemental Insulation, Insulating Bushings, and Assembly Aids		N
3.23	Switches		N
3.24	Transformers		N
3.25	Valves (Electrically Operated) and Solenoids		N
3.26	Video and Audio Components		N
3.27	Induction Power Transmitters and Receivers for Use with Low Energy Products		N
4	Units of Measurement		P
5	References		P
6	General		P



UL 1431			
Clause	Requirement	Result - Remark	Verdict
CONSTRUCTION			
7	General		P
8	Frame and Enclosure		P
9	Mechanical Assembly		P
10	Protection Against Corrosion		P
11	Supply Connections		P
11.1	Permanently connected products		N
11.2	Cord- and plug-connected products		P
12	Live Parts		P
13	Reservoir		P
14	Dispensers		P
15	Internal Wiring		P
16	Separation of Circuits		N
17	Printed Wiring		P
18	Heating Element		P
19	Electrical Insulation		P
20	Thermal Insulation		P
21	Overload Protection		P
22	Overtemperature Protection		P
23	Arc-Fault, and Leakage Current Detectors / Interrupters		P
24	Receptacles		P
25	Switches and Controls		P
26	Controls - End Product Test Parameters		N
27	Transformers		N
28	Motors		P
29	Spacings		P
29.1	Field-wiring terminals		N
29.2	Primary circuits		P
29.3	Secondary circuits		N
29.4	Spacings on printed wiring boards		P
30	Grounding		P
31	Brushes and Brush Holders		N
32	Double Insulation		N
PROTECTION AGAINST INJURY TO PERSONS			
33	General		P
34	Sharp Edges		P
35	Enclosures and Guards		P
36	Materials		P
37	Surface Temperatures		P
38	Stability		P



UL 1431			
Clause	Requirement	Result - Remark	Verdict
39	Strength of Handles		N
40	Rotating or Moving Members		P
41	Parts Subject to Pressure		N
42	Pressure-Relief Devices		N
43	Switches, Controls, and Interlocks		P
PERFORMANCE			
44	General		P
45	Operational Test		P
46	Leakage Current Test		P
47	Leakage Current Following Humidity Conditioning Test		P
48	Starting Current Test		P
49	Input Test		P
50	Temperature Test		P
51	Dielectric Voltage-Withstand Test		P
52	Immersion Test		N
53	Grounding Impedance Test		P
54	Abnormal Operation Tests		P
55	Connector Cycling Test		N
56	Reservoir Overflow Test		P
57	Dispenser Leakage Test		N
58	Cleaning Test		P
59	Thermostats Test		P
60	Printed Wiring Assemblies Test		N
61	Strain Relief Test		P
62	Solenoids		N
63	General Purpose Transformers		N
64	Thermoplastic motor insulation systems		N
RATINGS			
67	Details		P
MARKINGS			
68	Details		P
69	Servicing		P
70	Fuse Replacement		N
71	Oxygen		N
USE AND CARE INSTRUCTIONS			
72	General		P
73	Warning Instructions		P
74	User Instructions		P
75	Grounding Instructions		P
76	Two-Wire Polarized Attachment Plug Instructions		N



No.	Test Items	Requirement + Test	Result
1	Operational Test	UL 1431	Pass
2	Leakage Current Test	UL 1431	Pass
3	Leakage Current Following Humidity Conditioning Test	UL 1431	Pass
4	Starting Current Test	UL 1431	Pass
5	Input Test	UL 1431	Pass
6	Temperature Test	UL 1431	Pass
7	Dielectric Voltage Withstand Test	UL 1431	Pass
8	Abnormal Operation Tests	UL 1431	Pass
9	Dispenser Leakage Test	UL 1431	Pass
10	Cleaning Test	UL 1431	Pass
11	Strain Relief Test	UL 1431	Pass
12	Abnormal Voltage Test	UL 1431	Pass
13	Grounding Impedance Test	UL 1431	Pass
14	Thermostats Test - Overload	UL 1431	Pass
Subcontract Whether parts of tests for the product have been subcontracted to other labs: ☐ Yes ☒ No If Yes, list the related test items and lab information: Test items: --- Lab information: --			
Possible test case verdicts:		N/A	
- test case does not apply to the test object.....: P (Pass)			
- test object does meet the requirement.....: F (Fail)			



1. Operational Test

Test Method:

An as-received sample was set up or installed in accordance with the manufacturer's instructions. The samples was operated in - accordance with the manufacturer's instruction with respect to - the intended uses of the product, including maintenance and cleaning; and with all accessories recommended by the manufacturer for use with the product and lack of such maintenance and cleaning. The product was manipulated as it would be in actual use. The product was operated for a sufficient length of time or through a sufficient number of cycles so that all reasonably foreseeable complications were revealed.

Test Result:

There (☐ was / ☒ was no) risk of fire, electric shock, or injury to persons when operated as intended.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements

WALTEK



2. Leakage Current Test

Test Method:

One "as received sample was placed on an insulated surface and was connected to a _____120_____V, _____60_____Hz source of supply. Leakage currents to earth ground were measured from all exposed conductive surface of the unit by a meter having an input impedance of 1500 Ω resistive shunted by a capacitance of 0.15 μ F. For enclosure surface other than metal, the leakage current was measured using a metal foil with an area of 10 $\times$ 20cm in contact with the surface.

The test sequence was as follows:

- With switch S1 open, the appliance was connected to the measuring circuit. Leakage current was measured using both positions of switch S2. (**S1 - OFF, S2 - P1 / S1 - OFF, S2 - P2**)
- Switch S1 was then closed, energizing the appliance, and within a period of 5 second, the leakage current was measured using both positions of switch S2, and with the appliance operated at maximum heat setting of controls. (**S1 - ON, S2 - P1 / S1 - ON, S2 - P2**)
- Leakage current was monitor until thermal stabilization under the maximum heat condition. Both positions of switch S2 were used.
- For the appliance employs a single pole switch, monitoring of leakage was continued until the leakage current stabilized or decreased after the appliance was turn off.

The leakage current of a cord-connected appliance rated for a nominal 120V or 240V supply shall not be more than:

- 0.5mA**, and
- 0.75mA** for a grounded (3-wire) permanently connected appliance, or a cord connected appliance that is intended to be fastened in place or located in a dedicated space.

Test Result:

Condition	S1	S2	Measured maximum leakage current (mA)
a. - Unit ON	OFF	P1	<0.05
	OFF	P2	<0.05
b. - Unit ON (0 - 5 seconds)	ON	P1	<0.05
	ON	P2	<0.05
c. - Unit ON (Thermal stabilization)	ON	P1	<0.05
	ON	P2	<0.05
d. - Unit OFF (Leakage current stabilized or decreased)	ON	P1	<0.05
	ON	P2	<0.05

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements



3. Leakage Current Following Humidity Conditioning Test

Test Method:

A sample of the appliance that had been preheated to a temperature just above 34°C was contained in a chamber having a relative humidity of 88 ± 2 percent at a temperature of $32 \pm 2^\circ\text{C}$ for 48 hours.

Following the conditioning, while still in the chamber, the sample was tested unenergized as described in 43.6(a). Immediately after removal from the chamber, the sample was energized and tested as described in 43.6 (b) and (c). The test was discontinued when the leakage current stabilized or decreased.

The leakage current of a cord-connected appliance rated for a nominal 120V or 240V supply shall not be more than:

- a) **0.5mA**, and
- b) **0.75mA** for a grounded (3-wire) permanently connected appliance, or a cord connected appliance that is intended to be fastened in place or located in a dedicated space.

Test Result:

Condition	S1	S2	Measured maximum leakage current (mA)
a. - Unit ON	OFF	P1	<0.05
	OFF	P2	<0.05
b. - Unit ON (0 - 5 seconds)	ON	P1	<0.05
	ON	P2	<0.05
c. - Unit ON (Thermal stabilization)	ON	P1	<0.05
	ON	P2	<0.05
d. - Unit OFF (Leakage current stabilized or decreased)	ON	P1	<0.05
	ON	P2	<0.05

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements



4. Starting Current Test

Test Method:

The sample was connected to a ____120____ volt, 60Hz source of supply protected by a ____15____ ampere, non-time delay fuse. The product was started three times, with the product at room temperature at the beginning of normal operation - the beginning of the normal operation cycle, in the case of an automatic product - and the motor was allowed to come to rest between successive starts.

A switch or other device that controls a solenoid, relay coil, or the like and had not been tested and shown to be acceptable was subjected to an overload test consisting of 50 cycles of operation. The sample was connected to a grounded circuit of rated frequency and 110 percent of maximum rated voltage. The load on the device under test was the same as that which it was intended to control in intended service. During the test, exposed metal parts of the product were connected to ground through a 3-A fuse, and the connection was such that any single-pole, current-rupturing device was located in the ungrounded conductor of the supply circuit.

Test Result:

- ☒ For each start, the 15 ampere fuse remained intact.
- ☐ The ____ ampere fuse opened on the (first / second / third) start.
- ☐ The switch or other control device (could / could not) withstand the overload test.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements

WALTEK



5. Input Test

Test Method:

The power input was measured with the unit at normal operating temperature under full-load conditions and while connected to the supply circuit of the marked voltage rating, or the highest voltage of the applicable range of voltages specified.

Test Result:

Operating Condition	Supply Voltage (V)	Current (A)	Wattage (W)	Marked Rating (W)	Wattage Limit (W)
Max load	120	7.48	735	735	808.5

The measured power input (☐ was / ☒ was not) more than 110 percent of its marked rating.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.

WALTEK



6. Temperature Test

Test Method:

The sample was connected to a ____/____ volt, a.c., ____/____ Hz supply and operated at maximum normal load. Using thermocouples and a hybrid recorder, temperature were monitored on the components itemized on the next page.

☐ Denture Cleaners

The product is to be operated through four operation cycles, each of 15 minutes duration, with a 5 minute off period between successive operations.

☐ Oral Irrigation appliances

The product is to be operated through four cycles, emptying the reservoir each time at a reasonably strong pressure setting to result in a 4 minute operating on period, with a 5 minute off period between successive operations. A lesser on time may be employed if the reservoir empties during this time at the lowest pressure setting of the product. Tepid water, approximately 37°C (100°F) is to be employed for this test.

☐ Charger units for battery-operated toothbrushes

The temperature test is to be conducted with the output of the charger unit short-circuited and operation continued until constant temperatures have been attained.

☐ Toothbrushes

A cord-connected product is to be operated through six operational cycles, each of 3 minutes duration, with a 1 minute of period between successive operations.

Test Result:

The temperature of a surface that may be contacted by the user (☐ attained / ☒ did not attain) a temperature more than the maximum acceptable value as specified.

The sample (☐ attained / ☒ did not attain) a temperature at any point high enough to constitute a risk of fire or to damage any material employed in the appliance.

The sample (☐ showed / ☒ did not show) greater temperature rises at certain specified points itemized on the next page.

A thermal- or overload-protective device (☐ opened / ☒ did not open) the circuit during the temperature test.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.

37 Surface Temperatures

37.1 During the normal temperature test described in Temperature Test, Section 50, the temperature of a surface that may be contacted by the user shall not be more than the maximum acceptable value specified in Table 37.1.

37.2

All values for temperatures specified in Table 37.1 are based on a 25° C (77° F) ambient temperature; however, tests may be conducted at any ambient temperature within the range of 10 – 40°C (50 – 104°F) and corrected to 25°C (77°F). See 50.1.3 – 50.1.8.



Table 37.1
Surface temperatures

Location	Composition of surface ^a	
	Metallic	Nonmetallic
A handle or knob that is grasped for lifting, carrying or holding	50°C (122°F)	60°C (140°F)
A handle or knob that is contacted but does not involve lifting, carrying, or holding and other surfaces subject to contact in operation and user maintenance	60°C (140°F)	85°C (185°F)
A surface subject to casual contact	70° (158°F)	95°C (203°F)
^a A handle, knob or the like made of a material other than metal, that is plated or clad with metal having a thickness of 0.005 inch (0.13 mm) or less is evaluated as a nonmetallic part.		

WALTEK



Input: 120_V, 60Hz, 7.48_A, 735W

Load: Unit was operated continuously until thermal equilibrium.

RESULTS:

Ch.	Location	Temp Rise (°C)	Rise Limit (°C)
101	Plug	25.1	Ref.
102	Power cord	41.6	80
103	PCB	23.3	105
104	Fuse	39.9	65
105	Varistor	31.8	Ref.
106	X2 capacitor	36.0	Ref.
107	Wire connector	33.5	Ref.
108	PCB box	19.6	Ref.
109	DC Fan	15.9	Ref.
110	Pump	42.1	Ref.
111	Heater	40.9	Ref.
112	Heater holder	35.5	Ref.
113	Heater lead wire	10.4	Ref.
114	Thermal cutout	17.3	Ref.
115	Thermal cutoff lead wire	19.8	Ref.
116	Lamp	2.0	Ref.
117	Lamp holder	0.5	Ref.
118	Lamp lead wire	3.1	Ref.
119	Showing panel PCB	10.4	105
120	Showing panel holder	8.0	Ref.
201	Showing panel lead wire	11.3	Ref.
202	Knob	0.2	60
203	Plastic cushion (top)	18.2	60
204	Plastic cushion (bottom)	18.1	60
205	Lid	1.1	60
206	Ceramic surface	0.7	60

Ambient Temperature: 23.8°C (Ch: 207)



7. Dielectric Voltage-Withstand Test

Test Method:

A 60 Hz dielectric withstand potential was applied between the points indicated below. For this test, the sample was at its maximum normal operating temperature and all switches were set so that all circuits were energized. In each case, the test potential was gradually achieved starting from zero and held at the indicated value for a period of one minute.

1. ___1000___ volts between live parts of primary circuit and dead metal parts.
2. _____ volts between primary circuit and secondary circuit.
3. _____ volts between live parts of secondary circuit and dead metal with grounded secondary of transformer disconnected.

Test Result:

☒ In each case, there was no indication of dielectric breakdown or arc-over.

☐ A dielectric breakdown between live parts of the primary circuit and dead metal parts occurred at a potential of _____ volts.

☐ A dielectric breakdown between live parts of the primary circuit and secondary circuit occurred at a potential of _____ volts.

☐ A dielectric breakdown between live parts of the secondary circuit and dead metal parts occurred at a potential of _____ volts.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.



8. Abnormal Operation Test

General

Each abnormal test was followed by a dielectric voltage withstand test (Ref.: Section 48).

Each test was conducted on a separate sample unless agreeable to those concerned that more than one test could be conducted on the same sample.

During each test the grounding means, if provided, was connected to ground through a 3-A nontime-delay fuse.

During the tests, the unit was draped with a double layer of cheesecloth conforming to the outline of the product.

Component Breakdown Test

Test Method:

The components in the unit, such as diodes, resistors, transistors, capacitors, and the like, were shorted or opened, one at a time. The product was connected to the maximum test voltage and operated until ultimate conditions were observed, or for 4 hours if cycling of an automatically reset protector occurred.

Test Result:

There (☐ was / ☒ was no) risk of fire, electric shock, or injury to persons when operated as intended.

There (☐ was / ☒ was no) charring of cheesecloth.

The 3-A fuse (☒ did / ☐ did not) remain intact.

The sample (☒ did / ☐ did not) comply with Dielectric Voltage-Withstand Test.

There (☐ was / ☒ was no) flame or molten metal emitted from the unit.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.



9. Dispenser Leakage Test

An appliance that employs a device for dispensing a liquid and does not provide acceptable protection of live parts, shall be subjected to the test.

Test Method:

A sample oriented in any position that may be encountered in normal use, an amount equal to 1/2 the capacity of the dispenser reservoir - but not more than one pint of a saline solution consisting of 1/2 gram of salt per liter of water was poured into the chamber or area containing any part of the dispenser.

Immediately thereafter, the sample was tightly wrapped with conductive foil so as to be in contact with all exposed surfaces, and the sample required to acceptably withstand a potential of 2500 V AC applied between the conductive foil and live parts; and maintain a leakage current of less than 0.5 mA between the foil and ground when tested in accordance with the Leakage Current Test.

Test Result:

The samples (☒ complied / ☐ did not comply) with the requirements of Dielectric Voltage-Withstand Test.

The maximum leakage current recorded was 0.022 mA, which (☒ complied / ☐ did not comply) with the requirements of Leakage Current Test.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.

WALTEK



10. Cleaning Test

Test Method:

Each product, or portion of a product, that is intended to be cleaned by wiping or washing shall be conditioned as outlined in 58.2 and 58.3, after which the leakage-current test described in Leakage Current Test, Section 46 shall be repeated with no increase in the previously observed leakage current values.

For products intended to be wiped clean, the outer surface of one sample is to be wiped thoroughly with a folded cheesecloth applicator saturated in the cleaning agent specified in the instruction manual. The complete wiping procedure is to be repeated until a total of 5 operations has been completed.

For products intended to be washed, one sample of the product is to be submerged to the level indicated in a liquid bath as recommended in the instruction manual. Immersion time is to be for a total of one hour, after which the product is to be removed and dried thoroughly on the outside using a soft absorbent cheesecloth pad. The immersion and drying procedure is to be repeated until a total of 5 washings and dryings have been completed.

The cheesecloth shall be bleached, running 15 – 15 yd² /lb (approximately 26 – 28 m² kg) and have what is known in the trade as a "count of 32 by 28," that is, for any square inch, 32 threads in one direction and 28 threads in the other direction (for any square centimeter, 13 threads in one direction and 11 in the other direction).

Test Result:

After test the Leakage current (☐ was / ☒ was no) more than 0.5mA.

The sample (☒ did / ☐ did not) comply with Dielectric Voltage-Withstand Test.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.



11.Strain Relief Test

Test Method:

[✓] Supply cord test

A pull of 35 lbf (156 N) applied to the attached power cord for one minute without displacement, with the connections within the appliance disconnected. The specified force was applied to the cord and so supported by the appliance that the strain relief means will be stressed from any angle that the construction of the appliance permits.

[] Output or interconnecting cable strain relief test

A pull of 20 lbf (89 N) applied to the output cord or interconnecting cable for one minute, without displacement or breakage of the cord, or cable, or deformation of its anchoring surface. The specified force was applied to the cord and so supported by the appliance that the strain relief means will be stressed from the most severe angle that the construction of the appliance permits.

Test Result:

There (☐ was / ☒ was no) movement of the leads or cords such that stress would have resulted on the internal connections.

☐ The movement between the power cord and enclosure was ____0____ mm.

☐ The movement between the insulation and conductor was ____0____ mm.

☒ There (☐ was / ☒ was no) displacement or breakage of the cord, or cable, or deformation of its anchoring surface.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.



13.Abnormal Voltage Test

Test Method:

The sample was operated at a voltage equal to 1.3 times the rated voltage for 1 minute with no externally added load. After the test, parts that can cause an injury shall not have worked loose.

Test Result:

There (☐was / ☒was no) parts that can cause an injury have worked loose.

Conclusion:

These results (☒complied / ☐did not comply) with the requirements.

WALTEK



13. Grounding Impedance Test

Test Method:

An appliance with a grounding means, the impedance at 60 Hz between the point of connection of the appliance grounding means, including the supply cord, and any other metal part that is required to be grounded, shall not be more than 0.1 ohm.

It was determined by measuring the voltage when a current of 25 A, derived from a 60-Hz source with a no-load voltage not exceeding 6 V, was passed between the grounding pin of the attachment plug or other grounding means and the metal part.

Test Result:

The measured no-load voltage was ____0.7____ V.

The impedance was ____0.028____ ohm(s).

The impedance between the point of connection of the appliance grounding means, including the supply cord, and any other metal part (☐ exceeded / ☒ did not exceed) 0.1 ohm.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements.

WALTEK



14. Thermostats Test - Overload

Test Method:

59.2.1 An automatic control for temperature regulating or temperature limiting shall be capable of performing successfully for 50 cycles of operation when the product is connected to a supply circuit having a potential of 120-percent of the voltage specified in 44.2. There shall be neither electrical nor mechanical malfunction of the control, nor undue burning, pitting, or welding of the contacts.

59.2.2 In a test to determine whether an automatic control complies with the requirements in 59.2.1, the product is to be connected to a grounded supply circuit; the enclosure of the product, if of metal, is to be connected to ground through a 3-A fuse; and the control, if single-pole, is to be connected in an ungrounded conductor of the circuit. The control is to be operated at the rate of ten cycles per minute, except that a faster rate of operation may be employed if agreeable to all concerned. The performance is unacceptable if the fuse in the grounding connection opens during the test.

Test Result:

☒ The 3 ampere fuse remained intact.

There (☐ was / ☒ was not) neither electrical nor mechanical malfunction of the control, nor undue burning, pitting, or welding of the contacts.

Conclusion:

These results (☒ complied / ☐ did not comply) with the requirements

WALTEK



Photo Documentation:



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5

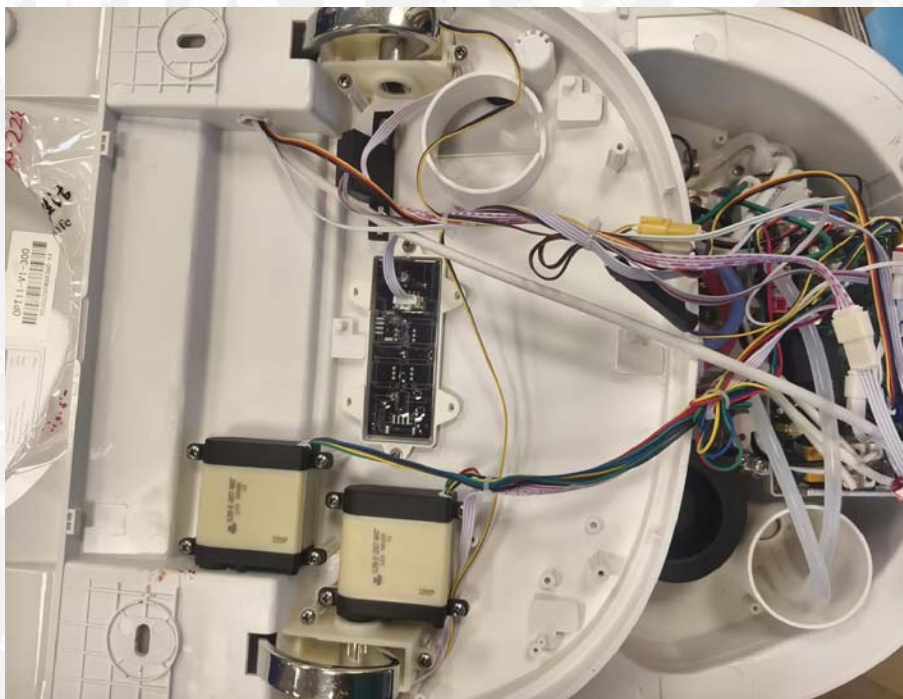


Photo 6

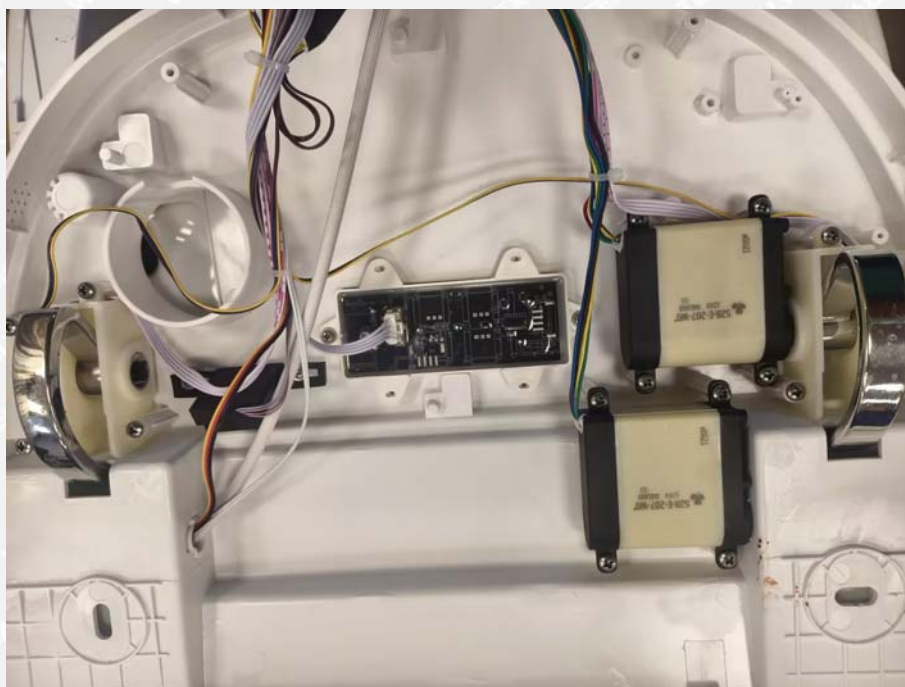


Photo 7



Photo 8

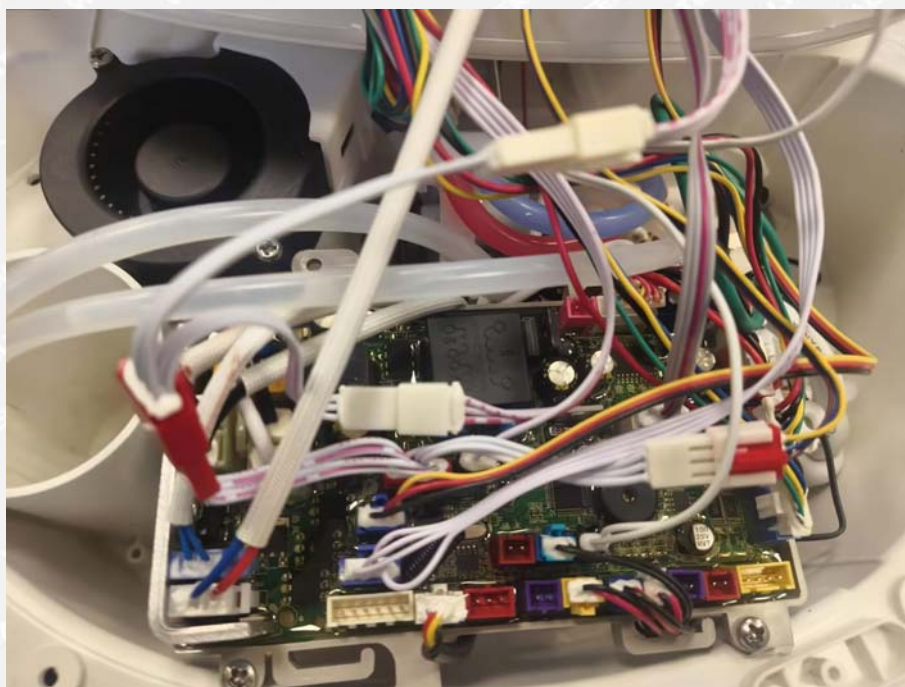


Photo 9



Photo 10



Photo 11

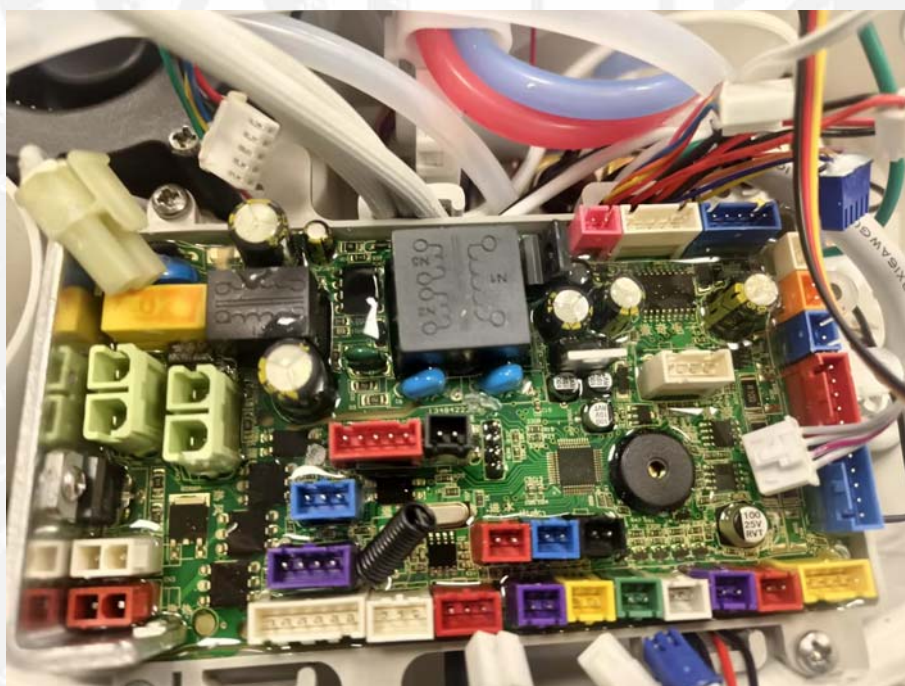


Photo 12

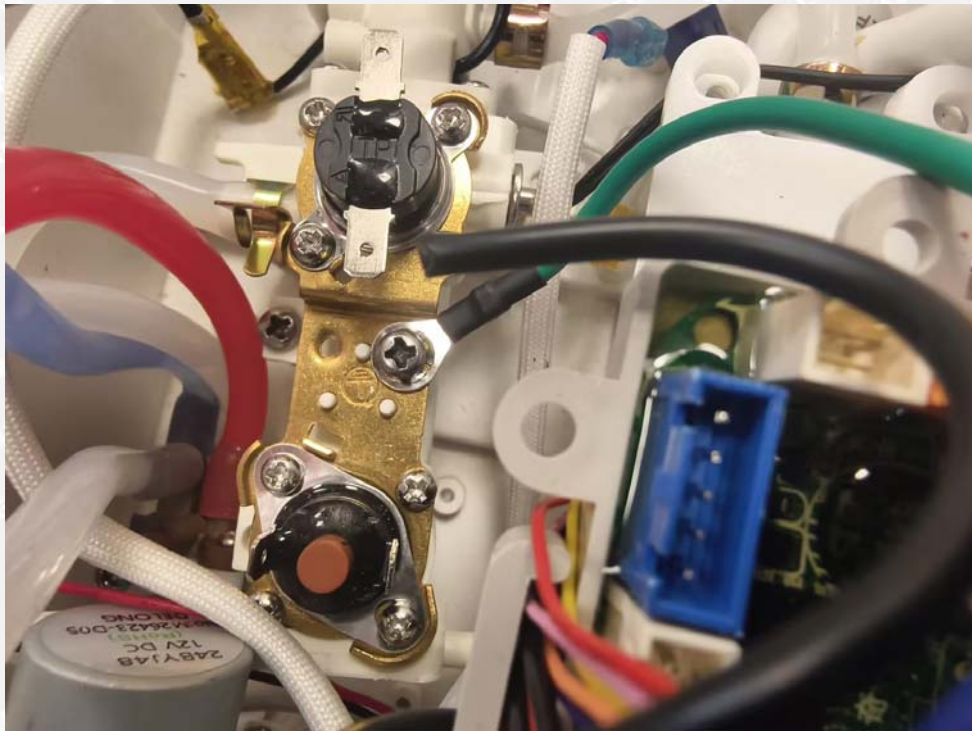


Photo 13



Photo 14



Photo 15



Photo 16



Equipment Used during Test:

Equipment	Model/Type
Temperature & Humidity Datalogger	THG312
Temperature Recorder	34970A
Power Meter	WT210
Dielectric & Insulation Resistance Tester	9012
Digital Multimeter	15B
Multi meter	115C
AC leakage current tester	7611
Walk-in Environmental Test Lab	BUL-50-26
AC Grounding Tester	YD2654B
Clock	HS-70W
Force Gauge	NK-300
Poise	35 LB

===== End of Report =====

WALTEK