CONTACT US

QUESTIONS? NEED PARTS? WE ARE HERE TO HELP!

Customer Service

ALL-PURPOSE CHROME SWIVEL STOOL **USER'S MANUAL**

Please inspect box contents to ensure you have received all components.

Base Plate - x1

Spacer - x4

Seat - x1

Seat Ring - x1

(f)


1/4" * 3/4" - x4

Hex Key - x1

Wrench - x1

κ A Stool Leg - x1 L 1/4" * 1-3/4" - x4 Thank you for purchasing a Chrome Swivel Stool. In order to register your product B to receive streamlined customer service, please fill out the following Product Registration Form. Include a copy of your original receipt with your submission. Stool Leg - x1 М (w/ flat center) С Stool Feet - x4 Ν First Name: _____ Last Name: _____ $\mathbf{\Phi}$ D Address: Feet Levelers - x4 City: _____ State: ____ Zip Code: __ Е 0 Email Address: _____ Phone: _____ Large Ring - x1 Product Model #: _____ Purchase Date: / / Location of Purchase: _____ F Ρ 3/16" * 1/2" - x4 Small Ring - x1 Please rate the importance of each feature (1 - least important, 10 - most important) Quality Price Size/Capacity Appearance Other G 1/4" * 1-1/4" - x9 Q Comments/Suggestions: Η 1/4" * 5/8" - x4 R 1 Nut - x5 \bigcirc S J Washer- x5

LIMITED WARRANTY

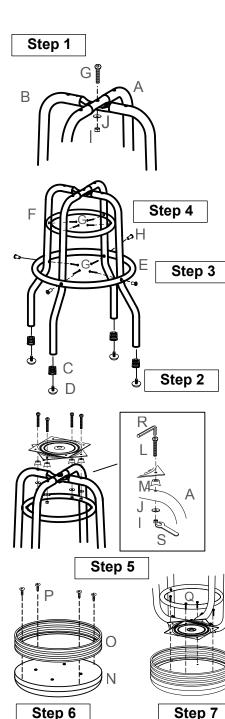

1. Put **A** on top of **B**, and fasten with **G** from the top and **J** and **I** from the bottom.

2. Once Legs (**A** + **B**) are secure, turn the legs upside down, and hammer in the Feet (**C**). Screw in Feet Levelers (**D**) into the Feet (**C**).

3. Turn the legs right side up. Place the Large Ring **(E)** around **A+B**, and slide into place. Match up the holes, and screw with **G** on the inside and **H** on the outside. Tighten.

4. Place Small Ring (F) on the inside of the legs. You may need to tilt ot fit into space. Match F with the holes on the legs, and screw in with G. Tighten.

5. Take out the baseplate **(K)**, and turn the top so that the top and bottom are at a 45 degree angle (see picture). Make sure to put **K** on the legs first. Insert **M** between **K** and the legs. Screw with **L** from the top, and **J** and **I** from the bottom.

6. Screw the Rim (**O**) to the Seat (**N**) with **P**. Make sure the Ring is centered to the Seat.

7. Lay the seat on the ground, and attach the legs while stool is upside down. Screw the Base Plate (K) to the Seat (N) with (Q).

8. Ensure all screws are tightened.

CHROME SWIVEL STOOL

LIMITATION OF REMEDIES AND LIABILITY