


ASSEMBLY INSTRUCTIONS

- 1.** Remove fixture from its original package
- 2.** Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- 3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1d) in hardware package
- 4.** Make proper electrical connections (**black** to **hot "L"**, **white** to **neutral "N"**, **ground** to **"GND"**) with wire nuts (1b) provided in hardware package
- 5.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)

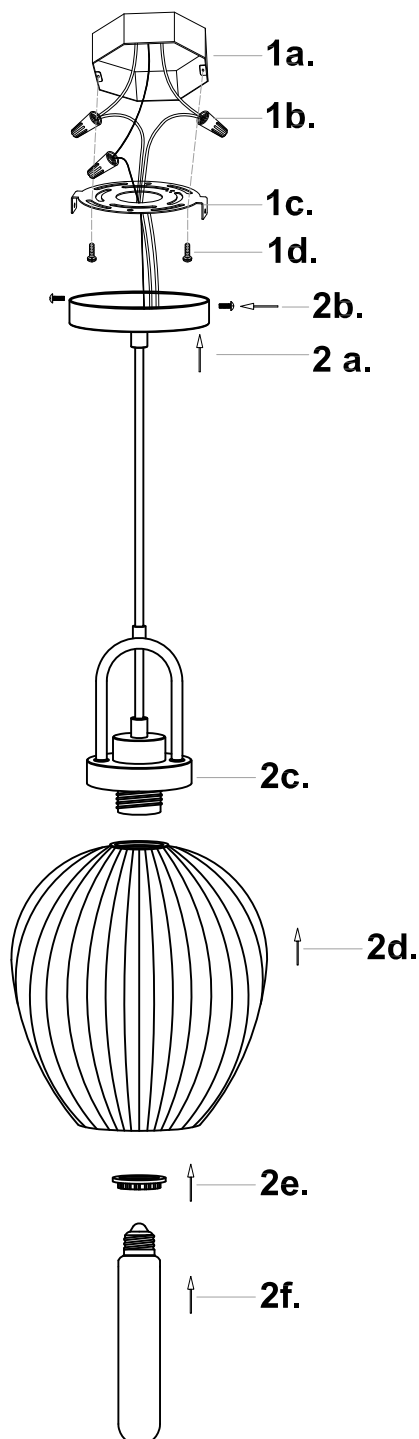

READ & SAVE

INSTALLATION & OPERATION INSTRUCTIONS

CAUTION: Before assembling your Lighting fixture, refer to the section titled ELECTRICAL CONNECTIONS. If you feel do not have enough electrical wiring experience, refer to a do-it yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

GENERAL

1. To ensure the success of installation, be sure to read these Instructions and review the diagrams before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the national ELECTRICAL codes. If You are unfamiliar with methods of installing electrical wiring. Secure the services of a qualified licensed electrician.
3. These fixtures are intended to be mounted to a 4" x 4" x 2-1/8" Deep metal octagon outlet box. The box must be directly Supported by the building structure.
4. Before starting the installation, disconnect the power by Turning off the circuit breaker or by removing the fuse at the Fuse box. Turning the power off using the light switch is not Sufficient to prevent electrical shock.

UNPACK THE FIXTURE

Check the contents of the box. You should receive

- Mounting hardware package
- Fixture assembly(s)
- Glass diffusers not supplied on all models

PREPARE THE FIXTURE

NOTE: FIRST TURN OFF ELECTRICITY

1. If you are replacing an existing fixture, disconnect and Remove the old fixture.
Expose the supply wiring from the outlet box.
2. Fasten the mounting bracket to the outlet box using the Two screws supplied with the outlet box. If the threaded Stem is not attached to the mounting bracket, screw the Stem into the center of the bracket and secure with the lockwasher and nut provided. Complete the assembly of Chandelier as shown in attached drawing(s).
3. Attach the fixture finial (support loop) to the top part of the Fixture. Turn the finial at least 3 complete turns to ensure Proper securement.
4. Attach the chain to the fixture finial (support loop) on the top of the fixture. Adjust the chain length by removing links at a point best suited for the location and required distance from the ceiling. Weave the wires through the chain links and then pass the chain through the finial nut and canopy. Thread the wires up through the finial loop and attach the chain to the top finial loop.

5. Raise the fixture to the ceiling, slip the ceiling canopy over the Threaded stem, and weave the electrical wire through the threaded Stem on the mounting bracket. Secure the top finial loop to the Threaded stem by screwing loop into stem. Turn the loop at least 8 Complete turns to ensure proper mounting and secure with nut.

6. To make electrical connections -SEE BELOW

ELECTRICAL CONNECTIONS

Required supply circuit: 110v, 60HZ

1. Cut excess fixture cord leaving six inches for electrical Connections. Split the cord into two separate wire leads. Connect The half with the ribbed surface to the white wire the supply circuit. Connect the half with the markings and smooth surface to the black wire of the supply circuit.
2. Connect the bare copper grounding wire from the Fixture, to the green screw on the mounting bracket, And the grounding conductor of the supply circuit. Use U.L./CSA Listed wire connectors suitable for the size type and number of conductors. No loose strands or connections should be present. Secure connectors with U.L./CSA listed electrical tape.

FINAL ASSEMBLY

1. Spread the electrical splices so that the black wires are on one Side of the outlet box and the white wires are on the other side.
2. Raise the ceiling canopy up to the ceiling and secure with finial nut.
3. Make sure the weight of the chandelier is supported by the chain-not the electrical cord. If you install hooks for a swag. They too must engage the chain only installation of this type should not be made on a radiant heating type ceiling.
4. Attach the long threaded rod to the center of the bottom of the fixture and install the two center light bulbs.
5. Attach the center glass bowl with trim and small decorative canopy and with knob nut provided.
6. Attach side shades and secure with fitter rings.
7. Install light bulbs (not Provided). CAUTION: Refer to the relamping label located near the lampholder for the recommended maximum wattage-do not exceed recommended maximum wattage-do not exceed recommended wattage.
8. Restore electricity and check operation of your lighting fixture.

IN MOST CASES THIS WILL BE A TWO PERSON INSTALLATION
YOUR ELECTRICAL BOX MUST BE PROPERLY REINFORCED TO SUPPORT THIS FIXTURE