



INLIGHT is registered trademarks of Inlight Co. Ltd. All Rights Reserved.

# Installation Guide



## Questions, problems, missing parts?

Contact the customer service department at [info@getinlight.com](mailto:info@getinlight.com)

We commit to respond to emails within 24 hours - and sooner, if possible!

We are devoted to solving problems and offering the best service to our customers.

## 1-LIGHT PENDANT LIGHT

SKU #

IN-0336-4-WD

Model #

180627-4CH



**PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING  
INSTALLATION AND RETAIN FOR FUTURE REFERENCE.**



**ATTACH YOUR RECEIPT HERE**

Purchase Date \_\_\_\_\_

## Safety Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purpose, this matter should be referred to Inlight Co. Ltd.

## IMPORTANT SAFETY INSTRUCTIONS

### WARNING: RISK OF ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

### CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

### WARNING: RISK OF BURN

- Allow fixture to cool before handling. Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all lamp manufacturer's warnings, recommendations and restrictions for: driver type, burning position, mounting locations/methods, replacement, and recycling.

### CAUTION: RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.

## Warranty

Inlight offers a 1 year warranty from the date of purchase which covers repairs or replacements of defective parts of the housing, optics, and electronics. Contact the Customer Service Team at [info@getinlight.com](mailto:info@getinlight.com) or visit [www.getinlight.com](http://www.getinlight.com)

## Installation Instructions

BEFORE STARTING THE INSTALLATION, SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER. CONSULT A LOCAL LICENSED ELECTRICIAN OR ELECTRICAL CONTRACTOR IF YOU ARE NOT SURE ABOUT THE INSTALLATION.



### TURN OFF ELECTRICITY

At main fuse box (or circuit breaker box)  
Before removing the old fixture



### REQUIRES 2 PEOPLE

Assistance will be required to support  
the fixture during installation

- 1 Gently take all parts out of the package, lay them on a smooth surface, unscrew the BALL NUTS from the FIXTURE SCREWS. Attach the MOUNTING BRACKET to the JUNCTION BOX using JUNCTION BOX SCREWS.

## 2 PENDANT LIGHT:

- A- Install SWIVEL and DECORATIVE PANEL on of the CEILING PLATE as shown, then secure with WASHER and NUT.
- B- Install STEMS based on the desired length of the item on the FIXTURE, adding CEILING PLATE one finished.

### CEILING LIGHT:


- A- Screw the STEM into the FIXTURE.
- B- Install CEILING PLATE and DECORATIVE PANEL on of the STEM as shown, then secure with WASHER and NUT.

## 3 Make wire connections with WIRE CONNECTORS:

- A- Connect the black wire from Fixture to the black supply wire.
- B- Connect the white wire from Fixture to the white supply wire.
- C- Attach the fixture ground wire to the MOUNTING BRACKET with the green GROUND SCREW. Then connectit to the supply ground wire with a WIRE CONNECTOR. Carefully tuck wires back into the JUNCTION BOX.

- 4 Attach the CEILING PLATE to the MOUNTING BRACKET through SCREW HOLES as shown, and secure it with BALL NUTS.


- 5 Install BULB (not included). See relamping label at socket area or packaging for maximum allowed wattage.

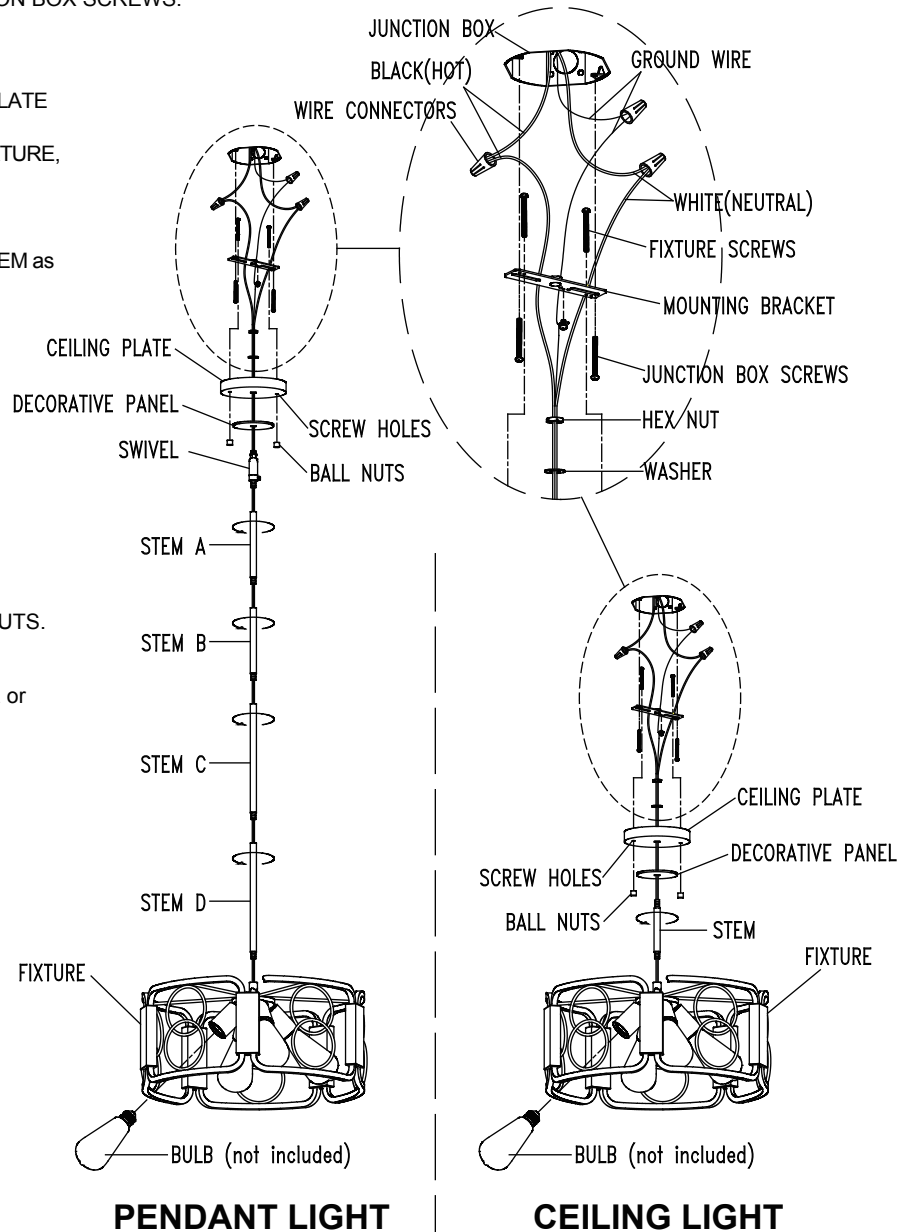

Questions, problems, missing parts? Before returning to the store,  
contact Inlight Customer Service

[info@getinlight.com](mailto:info@getinlight.com)

Retain this manual for future use.

 is registered trademarks of Inlight Co. Ltd. All Rights Reserved.