



④ lampshade 1pcs

② grub screw 2pcs

③ hex key 1pcs




① light fixture 1pcs




⑧ canopy 1pcs

⑨ cap nut 2pcs



⑤ hanging tube 1pcs



⑥ ring 1pcs



⑦ chain 1pcs



X 1PCS



X 1PCS



X 3PCS



X 3PCS




X 3PCS




X 3PCS




⑫ cylinder tube 5pcs

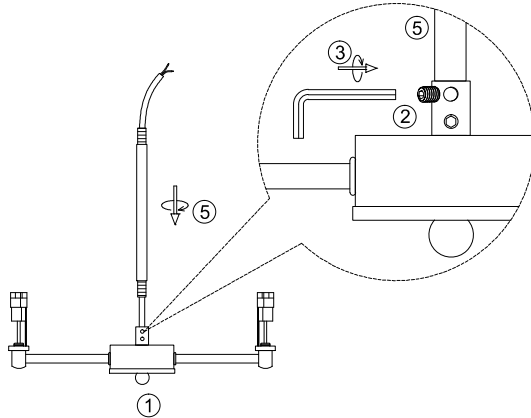


1. Let the wire go through the tube ⑤, rotate to install the tube ⑤ to the fixture ①, fixed with grub screw ② by rotate hex key ③.

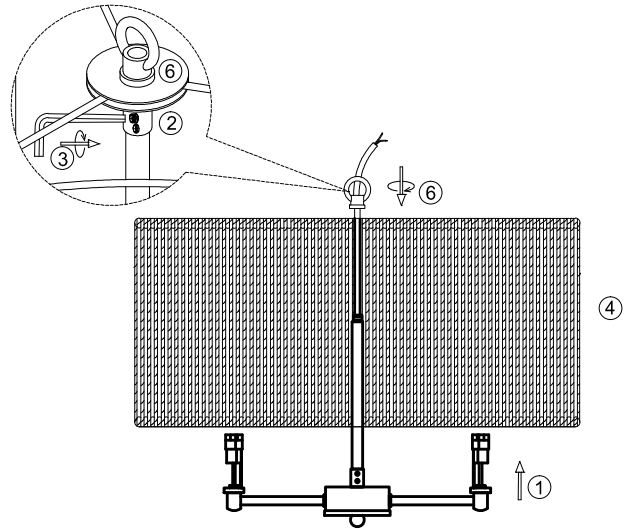

2. Let the wire go through the lampshade ④ and ring ⑥, rotate the ring ⑥ to install the lampshade to the fixture ①, fasten the ring ⑥ with grub screw by rotate hex key ③.

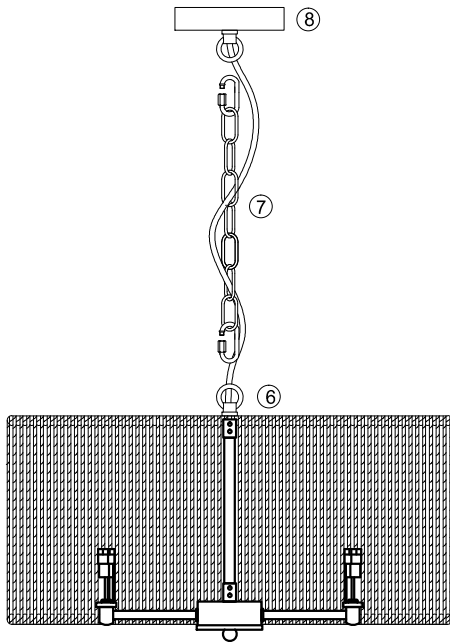

3. Hang the fixture to the canopy ⑧ with chain ⑦, let the wire go through chain ⑦ and canopy ⑧.

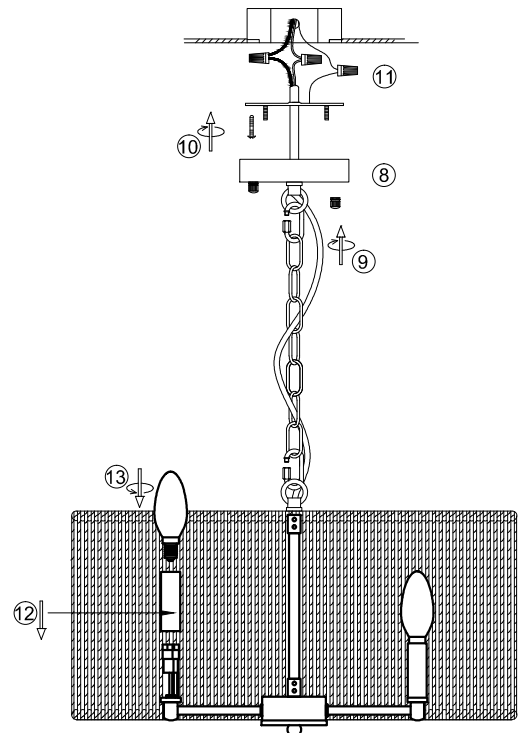

4. Install the bracket to the ceiling junction box with screw ⑩.
5. Connect the wire to your home line with cap connector ⑪.
6. Install the fixture to the bracket with cap nuts ⑨.
7. Put the cylinder tube ⑫ on the bulb holder and install the bulbs ⑬.

D9001M-5

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !