


Product Manual

Warning items




IMPORTANT INFORMATION!

please read the entire manual before starting to assemble and/or using this product. follow the manual thoroughly and keep it for further reference.





AVOID SCRATCHES!

In order to avoid scratching this furniture should be assembled on a soft layer - could be a rug.

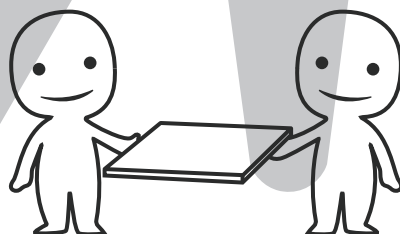

IMPROVE EFFICIENCY !

Try to find a partner to install with you, which can speed up the installation efficiency and shorten the time.



ANTI-TOPPLE WARNING !

Overturned furniture can cause serious or fatal crush injuries. To prevent tipping over, be sure to use the wall attachment, if not included with this product. Please purchase the wall attachment that fit your wall. If unsure, seek professional advice. Please read and follow each step of the instructions carefully.

IMPORTANT !


It is important that any product which is assembled using any kind of screw is re-tightened 2 weeks after assembly, and once every 3 months - in order to assure stability through-out the lifespan of the product.

For regular maintenance and cleaning of the product, for the frame, please use a rag dipped in neutral detergent to fully wipe it, and then dry it with a clean rag. For glass materials, wipe with a rag dampened with water glass cleaner, and then dry with a dry rag.


Do not use an electric screwdriver, and do not use too much force when installing, because the board is easy to break.

Parts List

The same number represents the same size board.

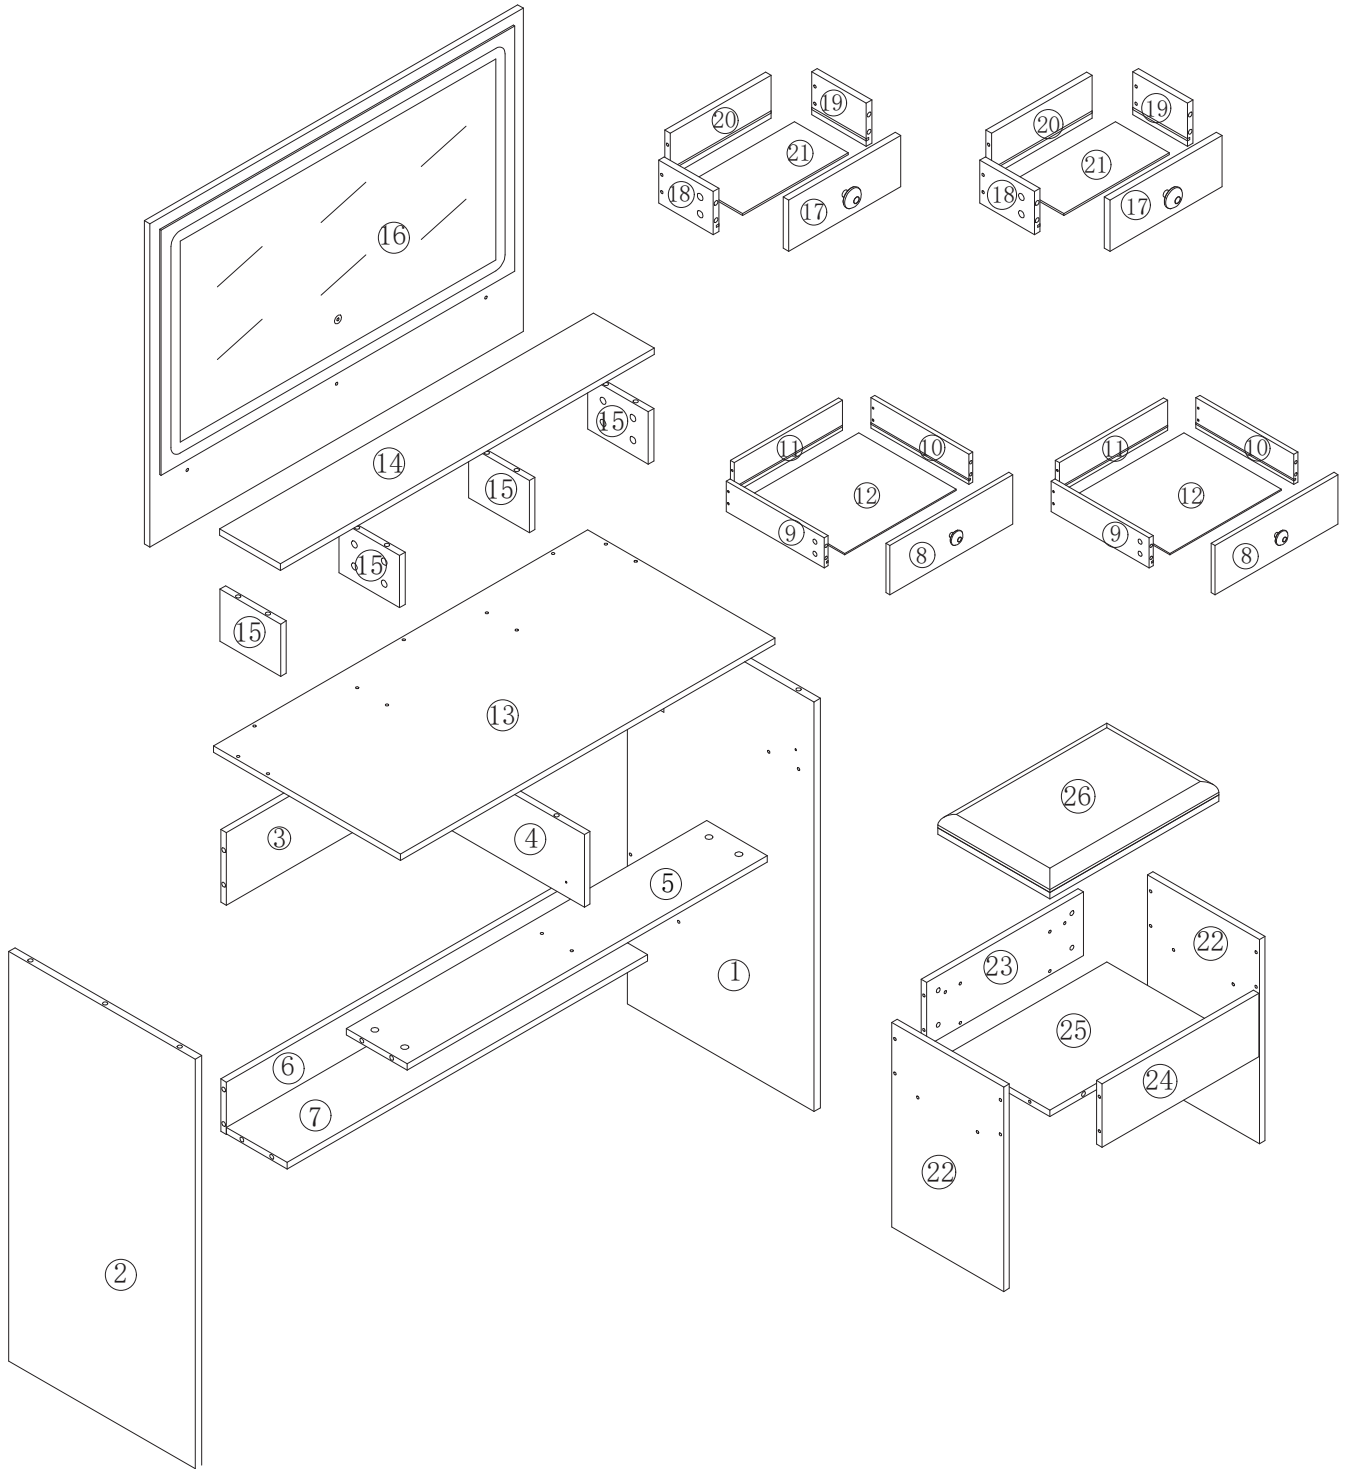

Parts List



Please prepare the following tools

A x 65

Ø6 x 35 mm

B x 65

Ø12 x 10 mm

C x 37

Ø4 x 40 mm

D x 37

Ø10 x 9 mm

E x 4

Drawer handle

F x 4

Ø4 x 16 mm

G x 62

Ø 3.5 x 12.5 mm

H x 1

Charging Station

I x 4

I1
I2

Drawer Slide 12 inches

J x 2

Cabinet Hinge

K x 1


Screwdriver

L x 1



USB Line

Warm Reminder

Before installing the drawer rail, you need to separate the I1 and I2 first.

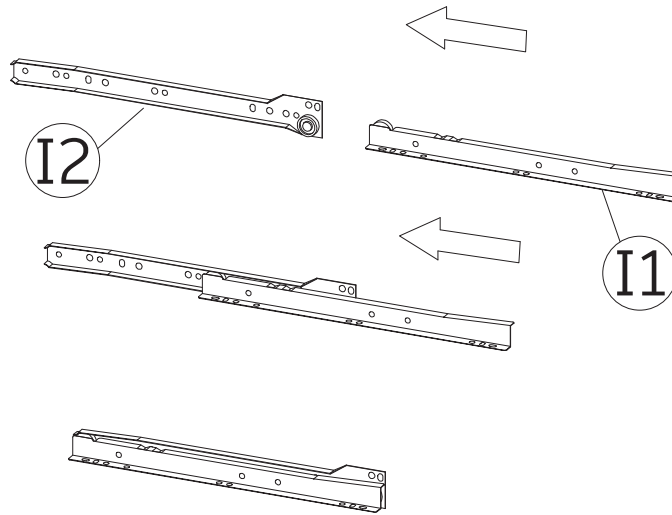


This Cam Lock Fastening System will be used throughout the assembly process.

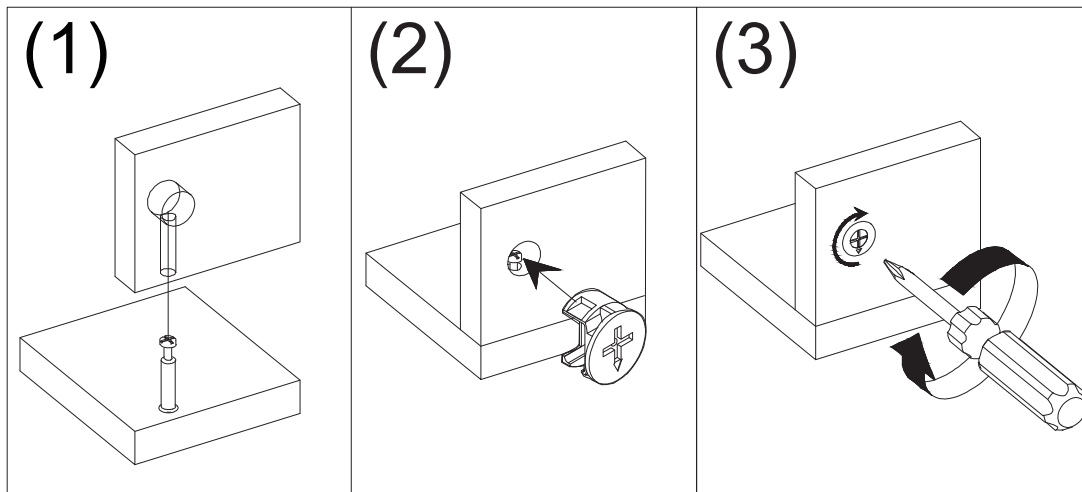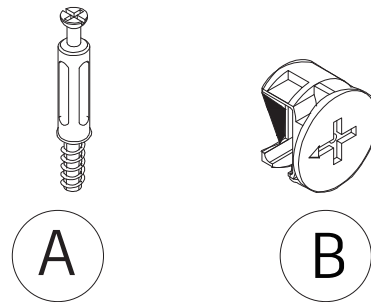


Install


1



- ① x 1
- ② x 1
- ⑧ x 2



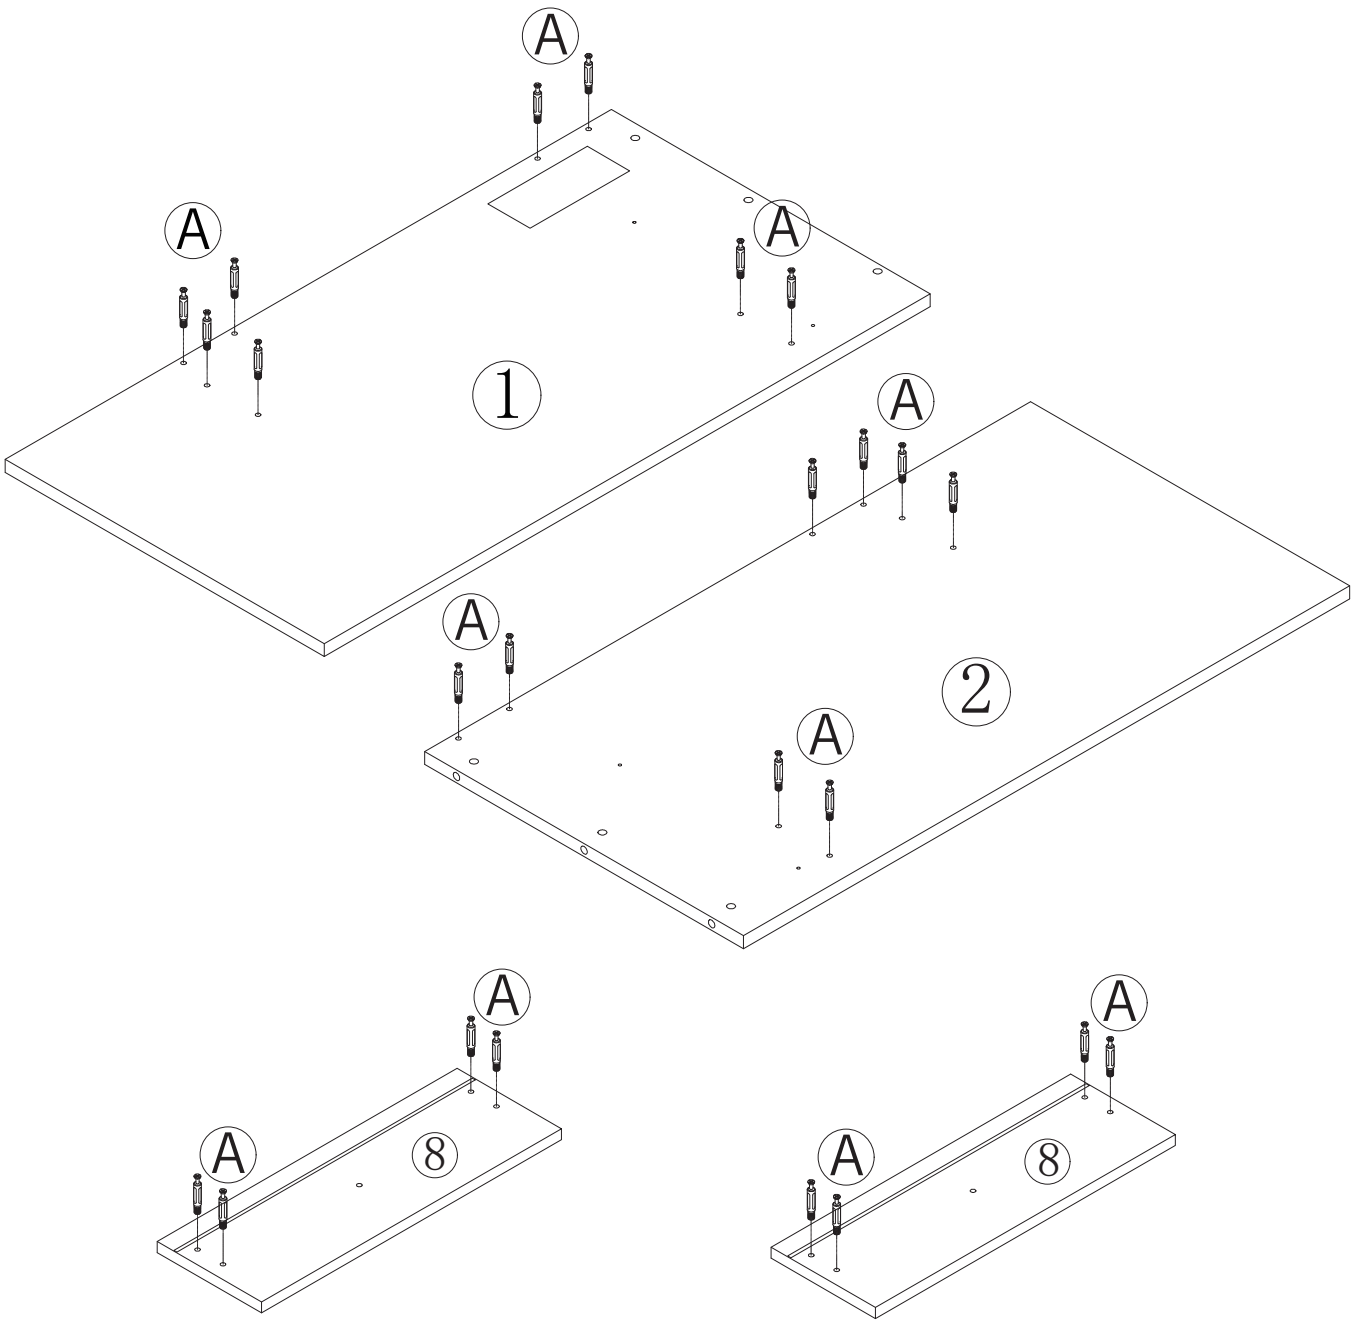


Screw the cam bolt (A) into the panel (1) & (2).
Screw the cam bolt (A) into another panel (8).




Install

2





 A x 41 Ø6 x 35 mm	(13) x 1	(17) x 2	(24) x 1	 
	(14) x 1	(23) x 1		

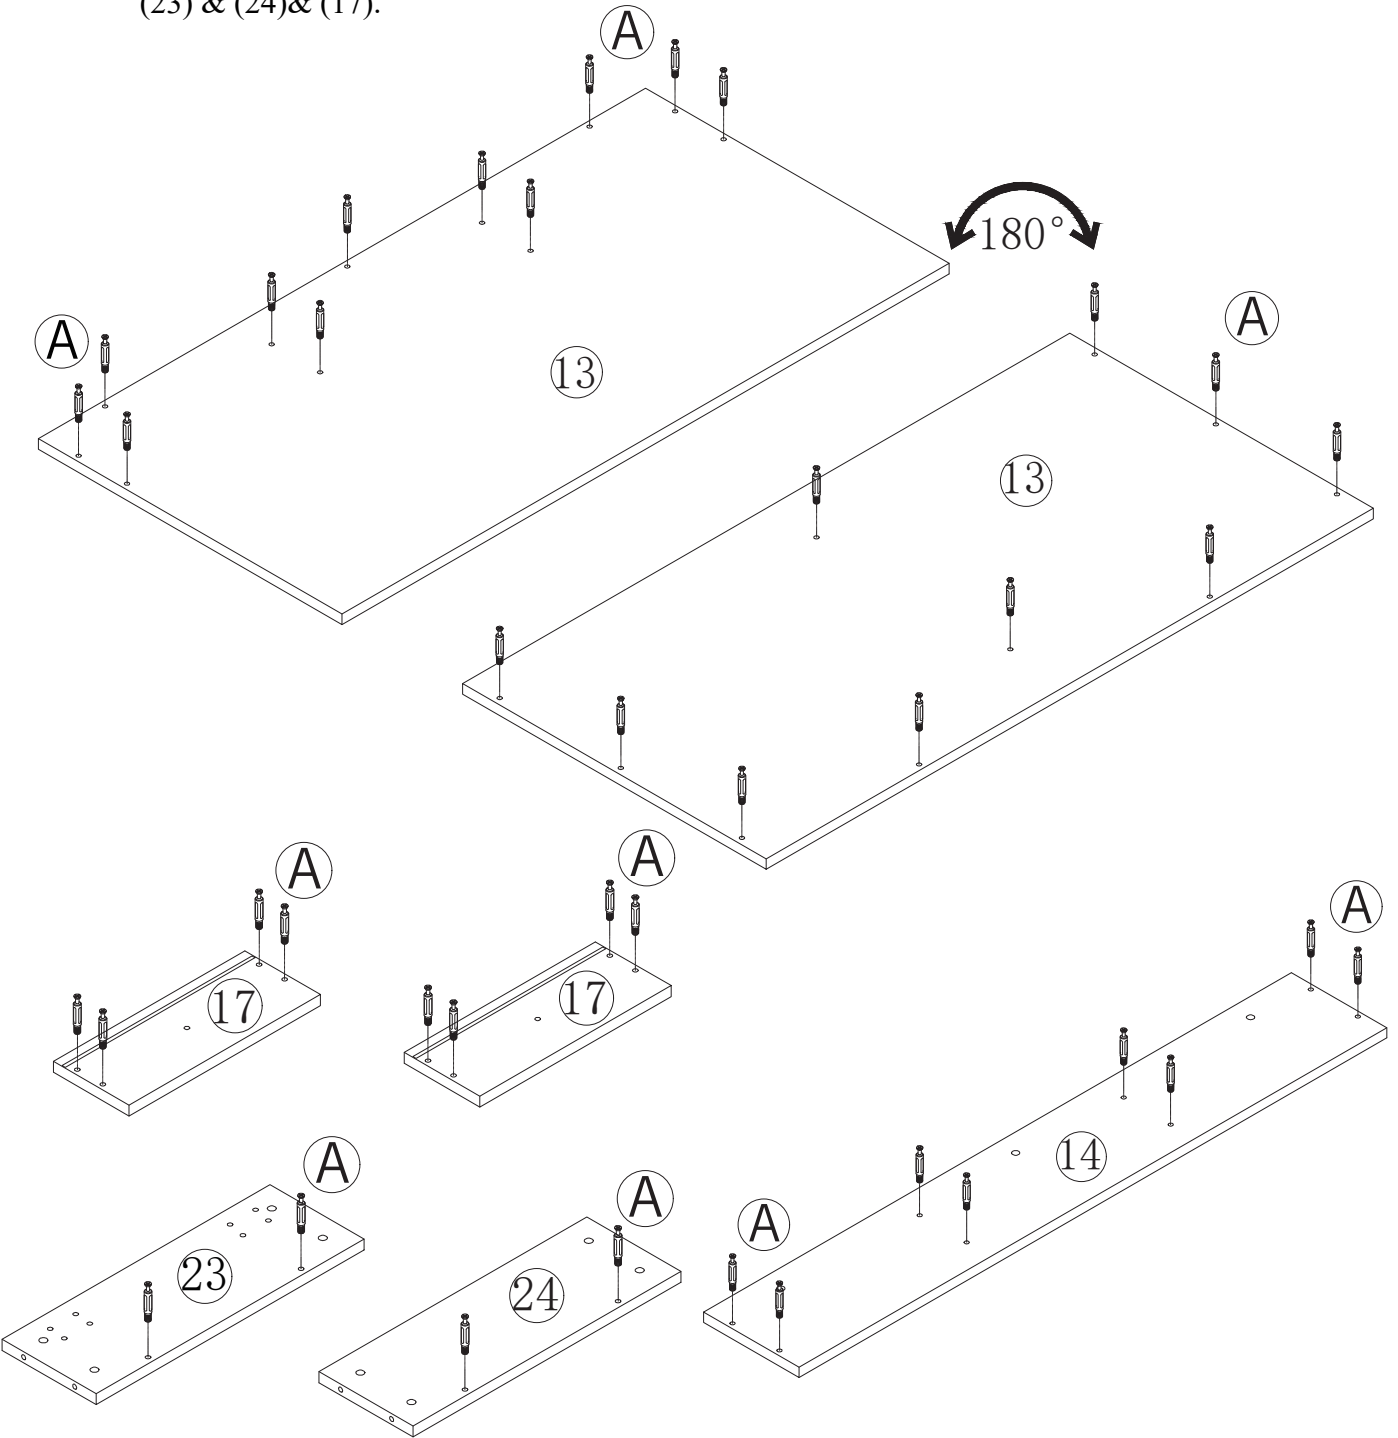Screw the cam bolt (A) into the panel (13).
 Flip the board 180° and screw the cam bolts (A) into panel (13).
 Screw the cam bolt (A) into the panel (14) & (23) & (24) & (17).





Install

3

C x 8  Ø4 x 40 mm	D x 8  Ø10 x 9 mm	9 x 2 11 x 2	10 x 2		
--	--	-----------------	--------	---	---


Screw the part (D) into the panel (11).
Attach panels (9) & (10) to (11) with screws (C).

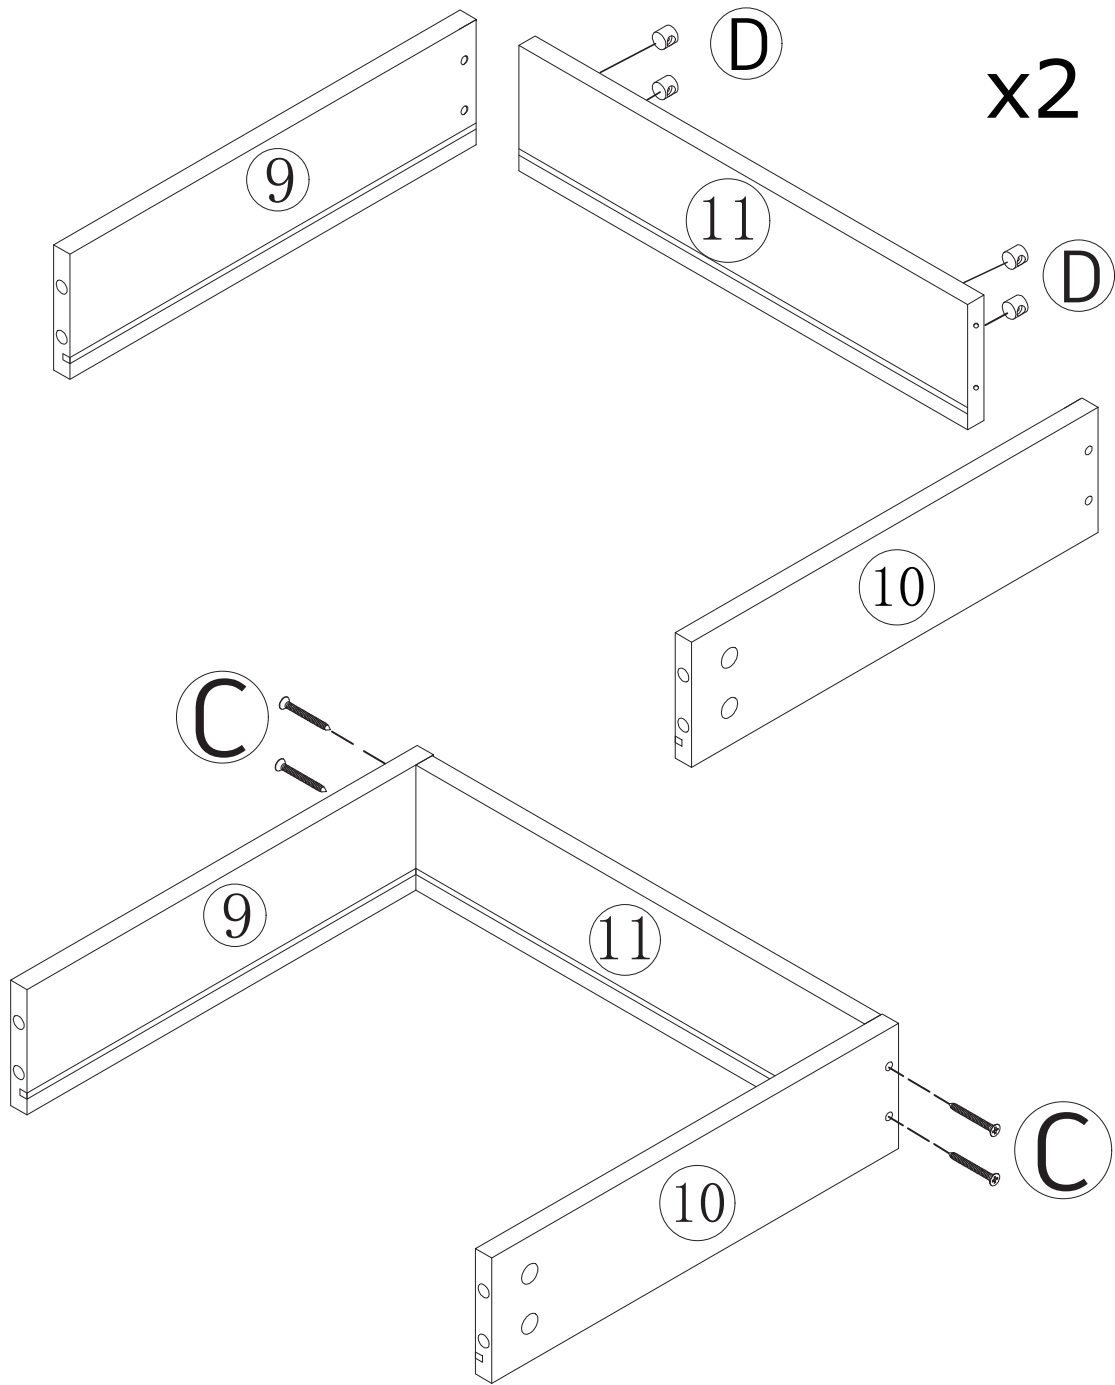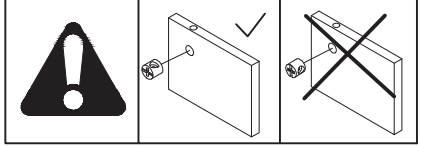



Install

4

12 x 2








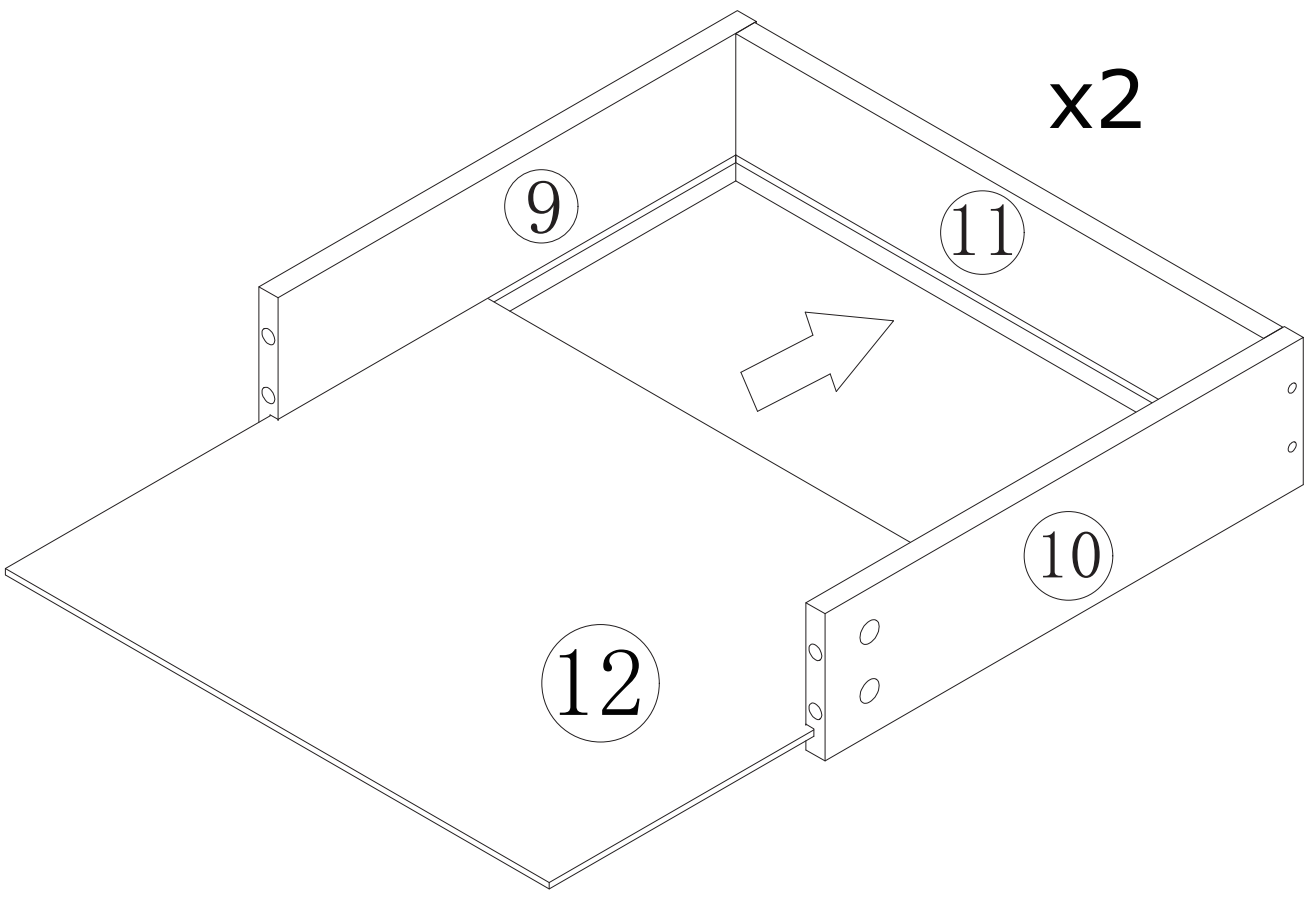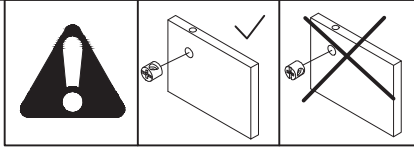Slide bottom panel (12) into the assembled two drawer





Install

5


<p>B x 8</p>  <p>M12 x 10 mm</p>	<p>E x 2</p> 	<p>F x 2</p>  <p>Ø4 x 16 mm</p>	<p>8 x 2</p>		
---	--	--	--------------	---	---

Attach the drawer handle (E) to the center of panel (8) using screw (F).
 Attach the panel (8) and secure with cam lock (B)

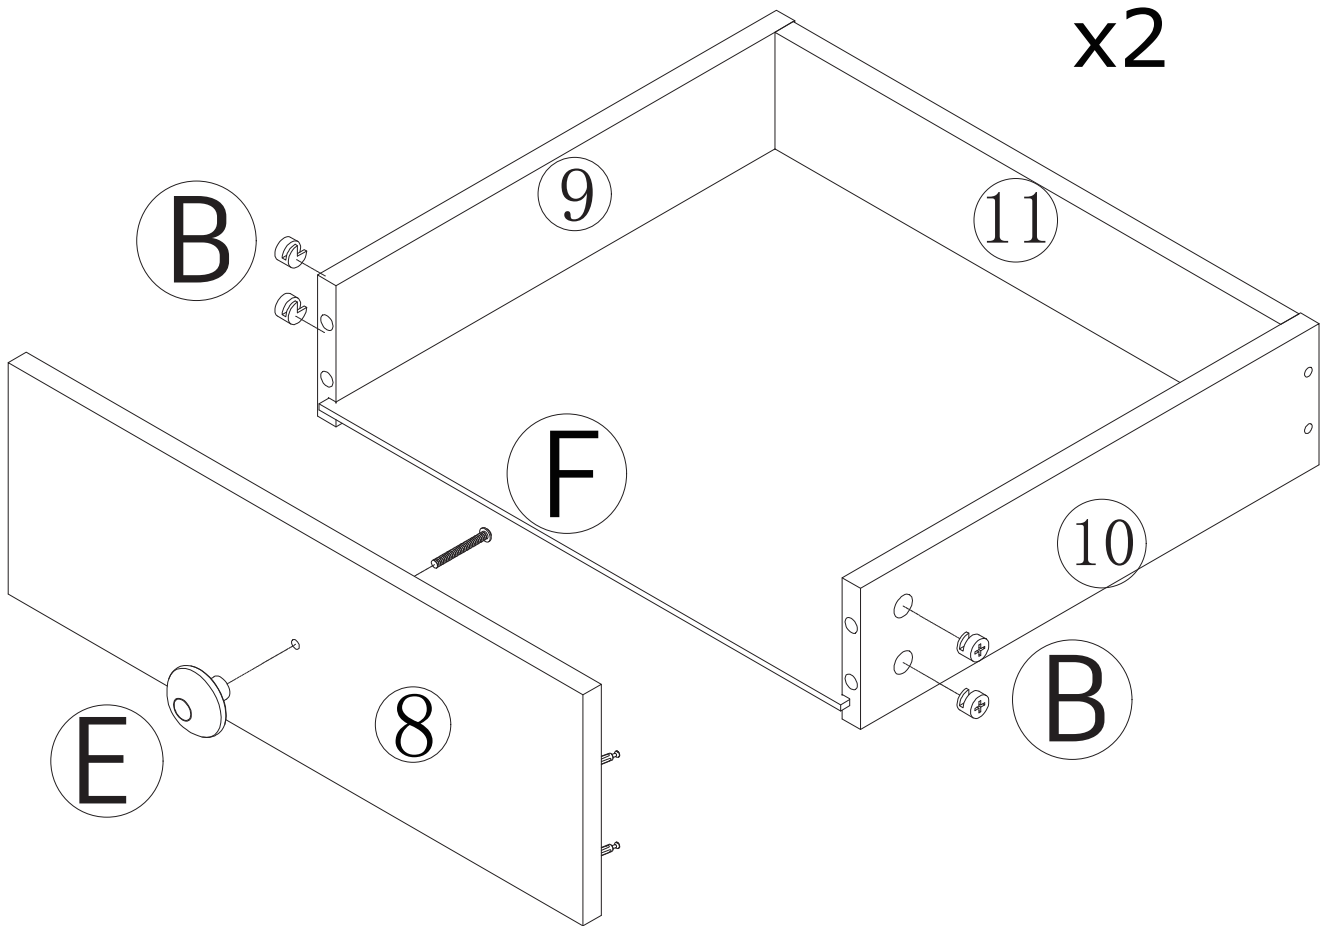
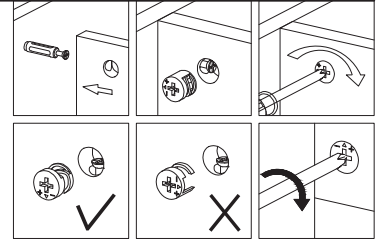


Install


6

G x 12  Ø3.5 x 12.5 mm	I1 x 4  I1		
---	--	---	---

Install track (I1) into the bottom of the drawer and lock with screw (G).
Repeat the above steps 4 times.
Note: Refer to the diagram to make sure the alignment holes on panels (9) & (10) line up correctly with the holes on track (I1)

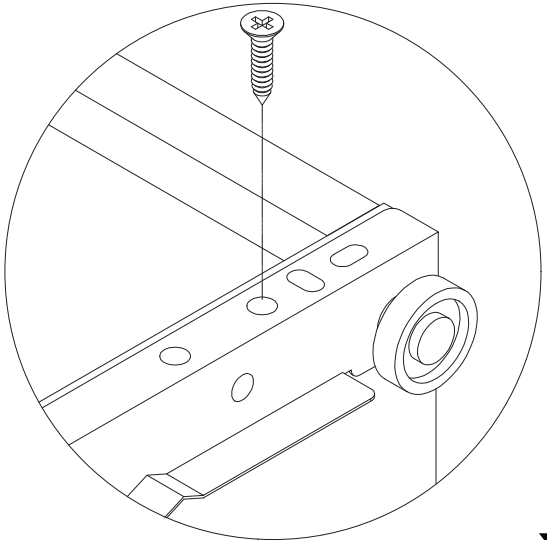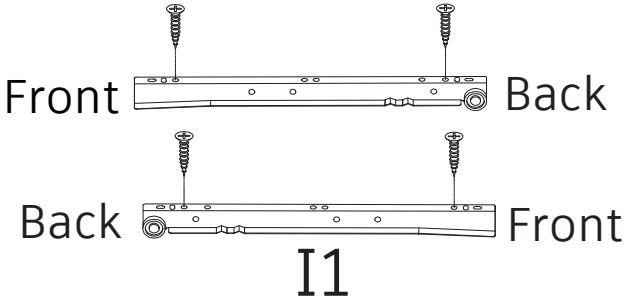





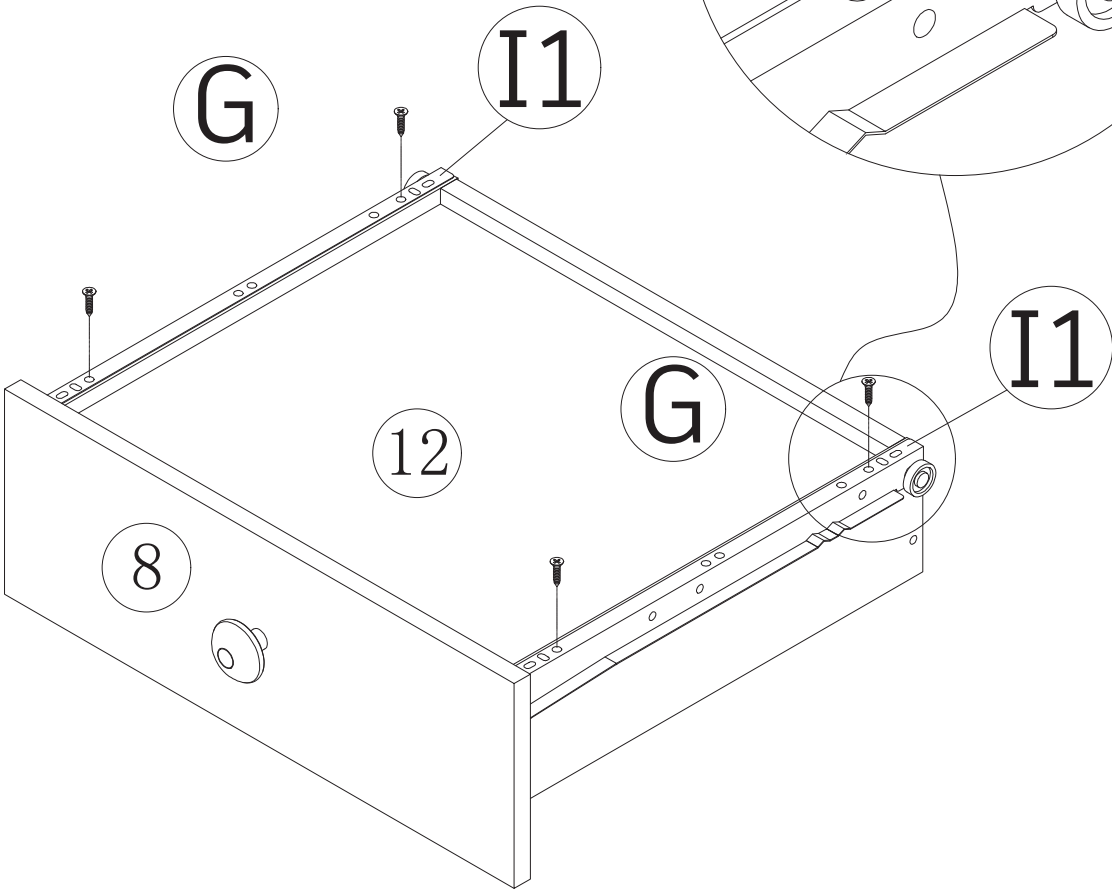x2







Install

7

<p>C x 8</p>  <p>Ø4 x 40 mm</p>	<p>D x 8</p>  <p>Ø10 x 9 mm</p>	<p>18 x 2</p> <p>19 x 2</p> <p>20 x 2</p>		
--	--	---	---	---

Insert Parts D into Panel 20. Attach Panels (18), (19), and (20) with Screw C.


		
---	---	---

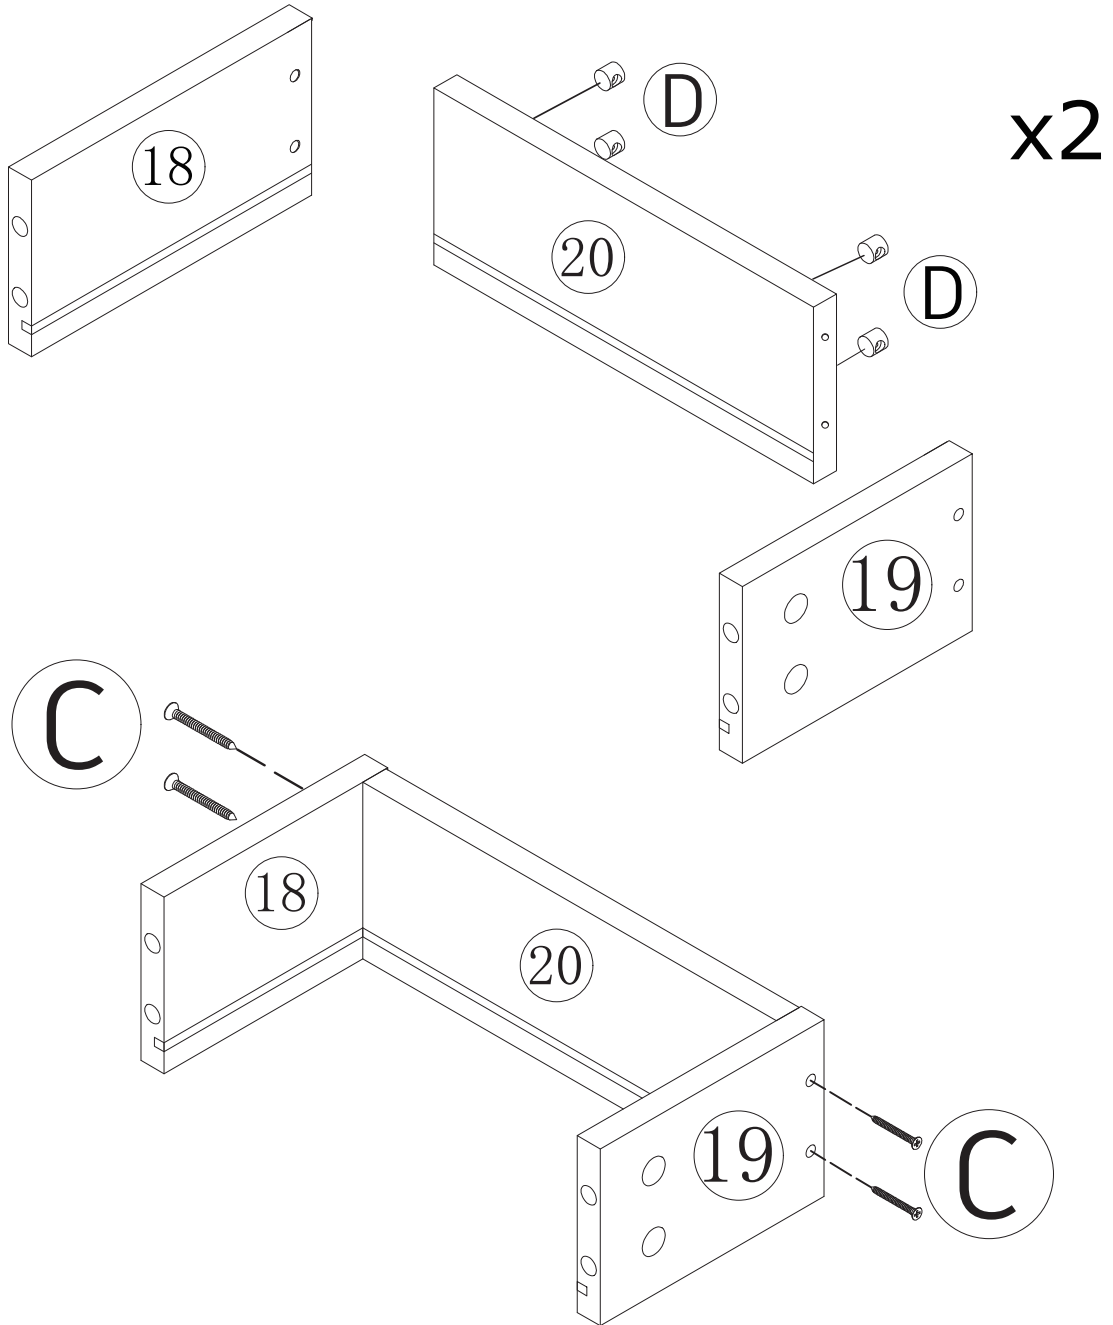





Install

8

(21) x 2

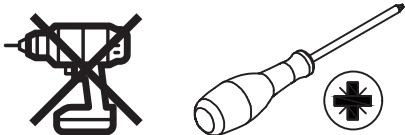






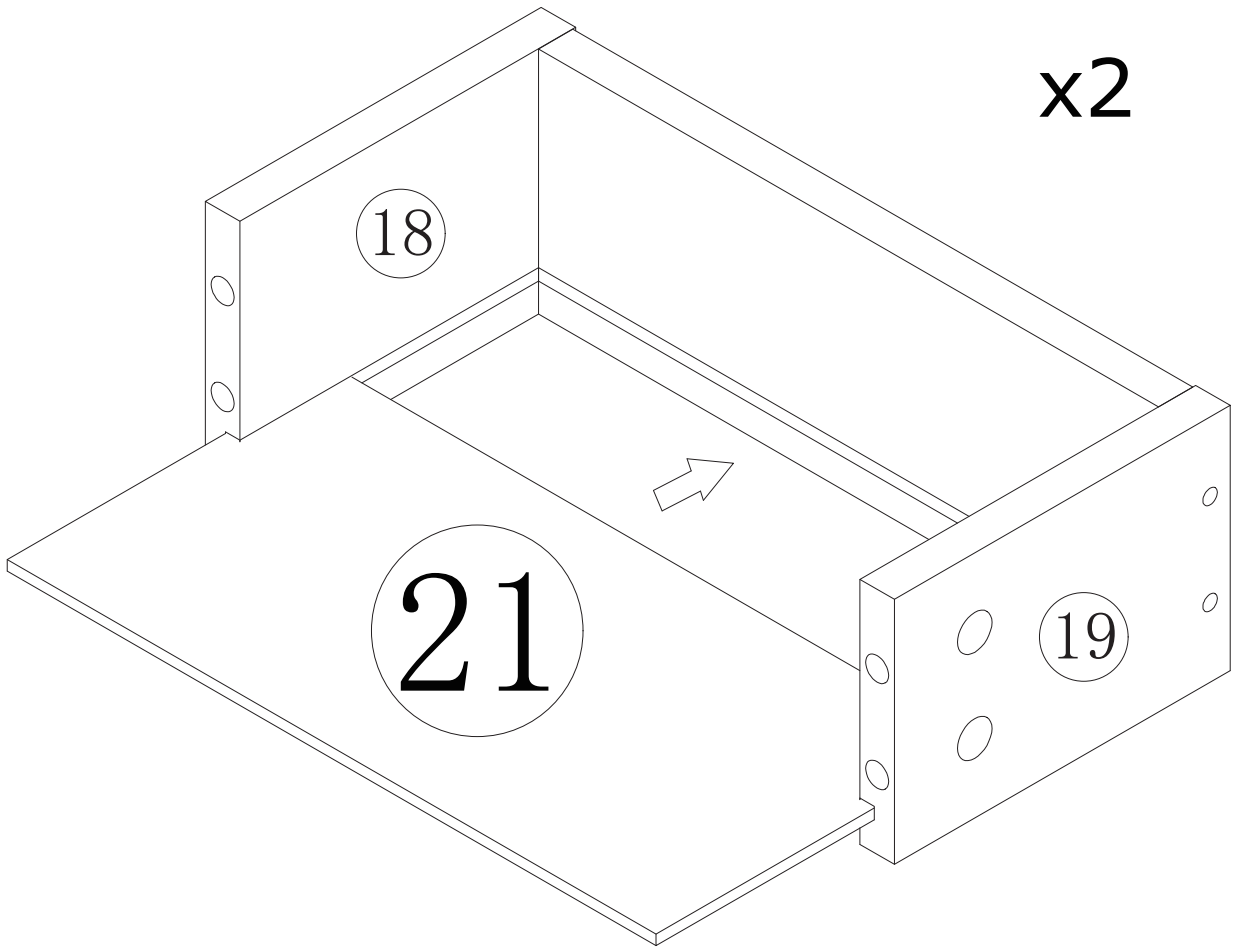Insert the bottom panel (21) into the assembled drawers





Install

9

<p>B x 8</p>  <p>M12 x 10 mm</p>	<p>E x 2</p> 	<p>F x 2</p>  <p>Ø4 x 16 mm</p>	<p>(17) x 2</p>	 
---	--	--	-----------------	---




Pass screw (F) through the center of panel (17) to attach it to the drawer handle.

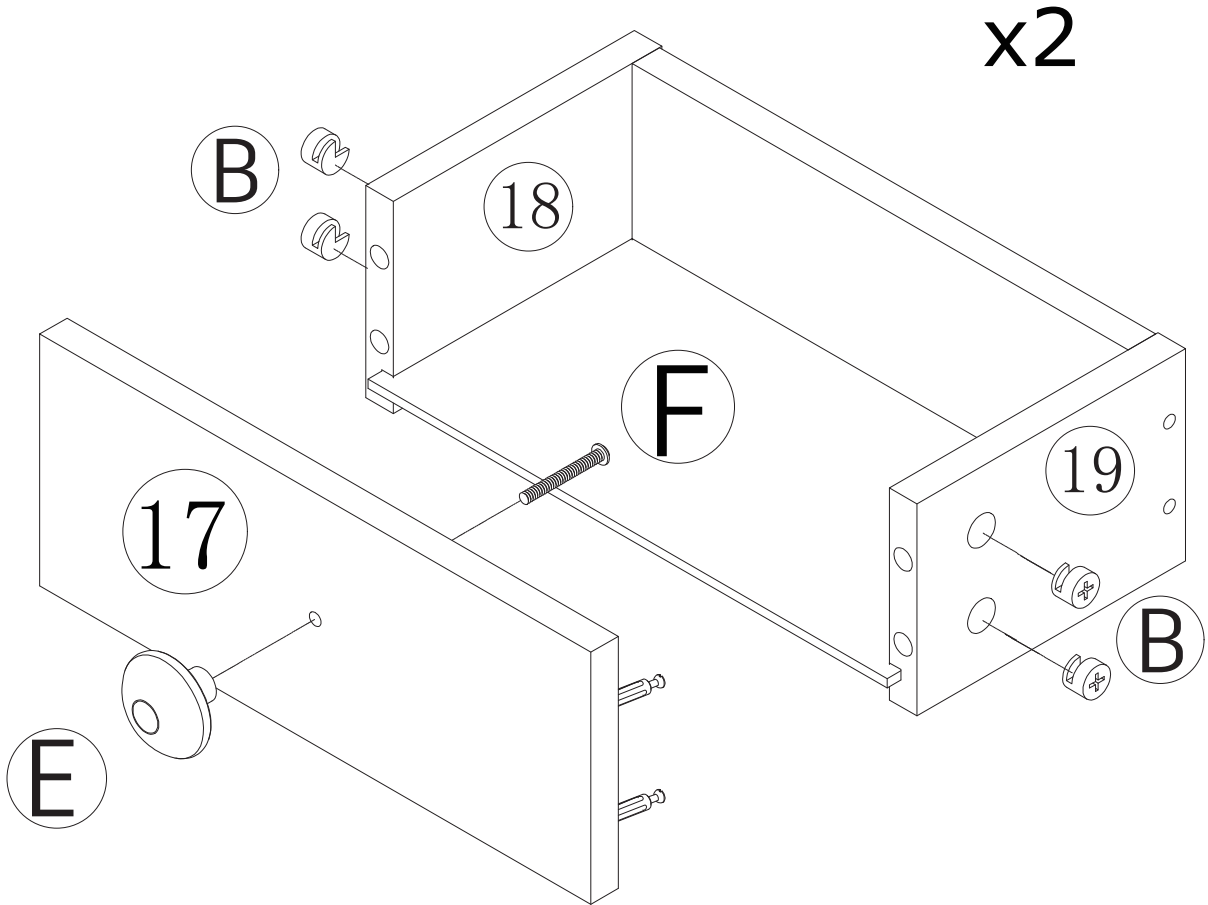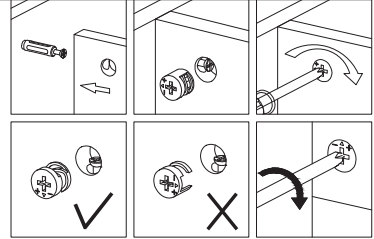
Align screw (A) on panel (17) with the holes in panels (18) & (19) and lock with cam lock (B).



Install

10


G x 6  Ø3.5 x 12.5 mm	I2 x 2  I2		
--	---	---	---

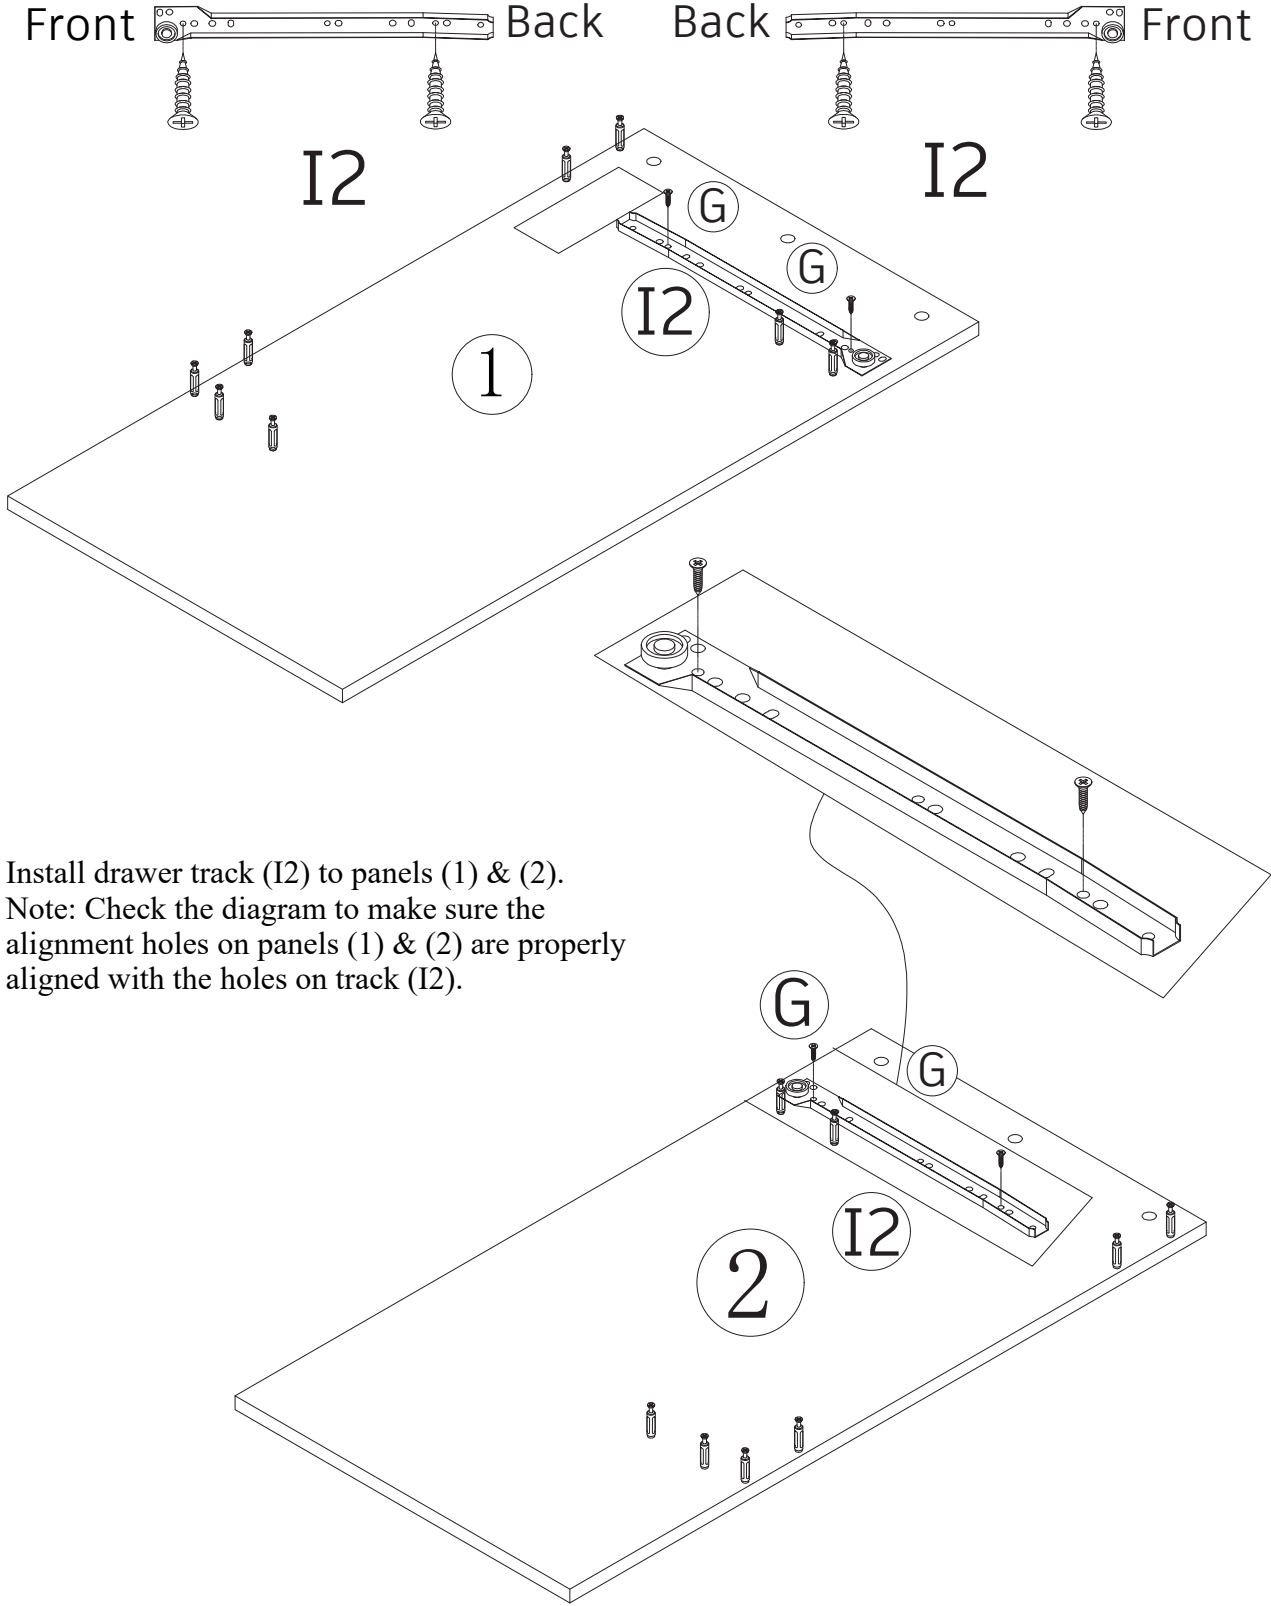


Install drawer track (I2) to panels (1) & (2).
Note: Check the diagram to make sure the alignment holes on panels (1) & (2) are properly aligned with the holes on track (I2).

Install

11

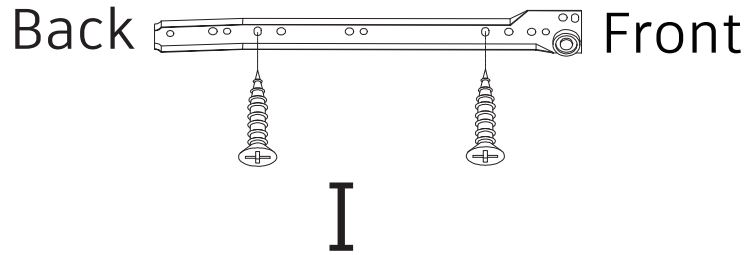





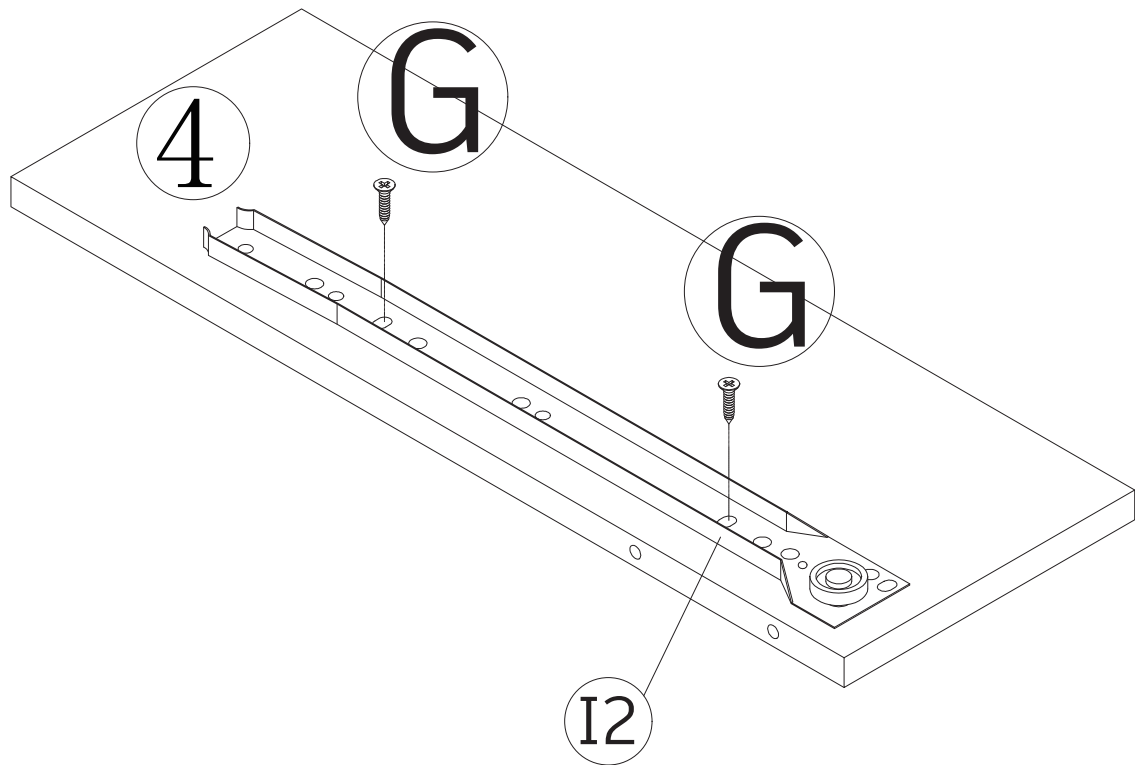As shown in the picture, install rail (I2) on panel (4) by using Screw (G). Only one rail needs to be installed in this step. Please pay attention to the direction and position of the rail.







Install

12

C x 2  Ø4 x 40 mm	D x 2  Ø10 x 9 mm	③ x 1 ④ x 1		
--	--	--------------------	---	---





Insert Part (D) into panel (4).
Use screw (C) to pass through the holes in panel (3)
and screw into panel (4).

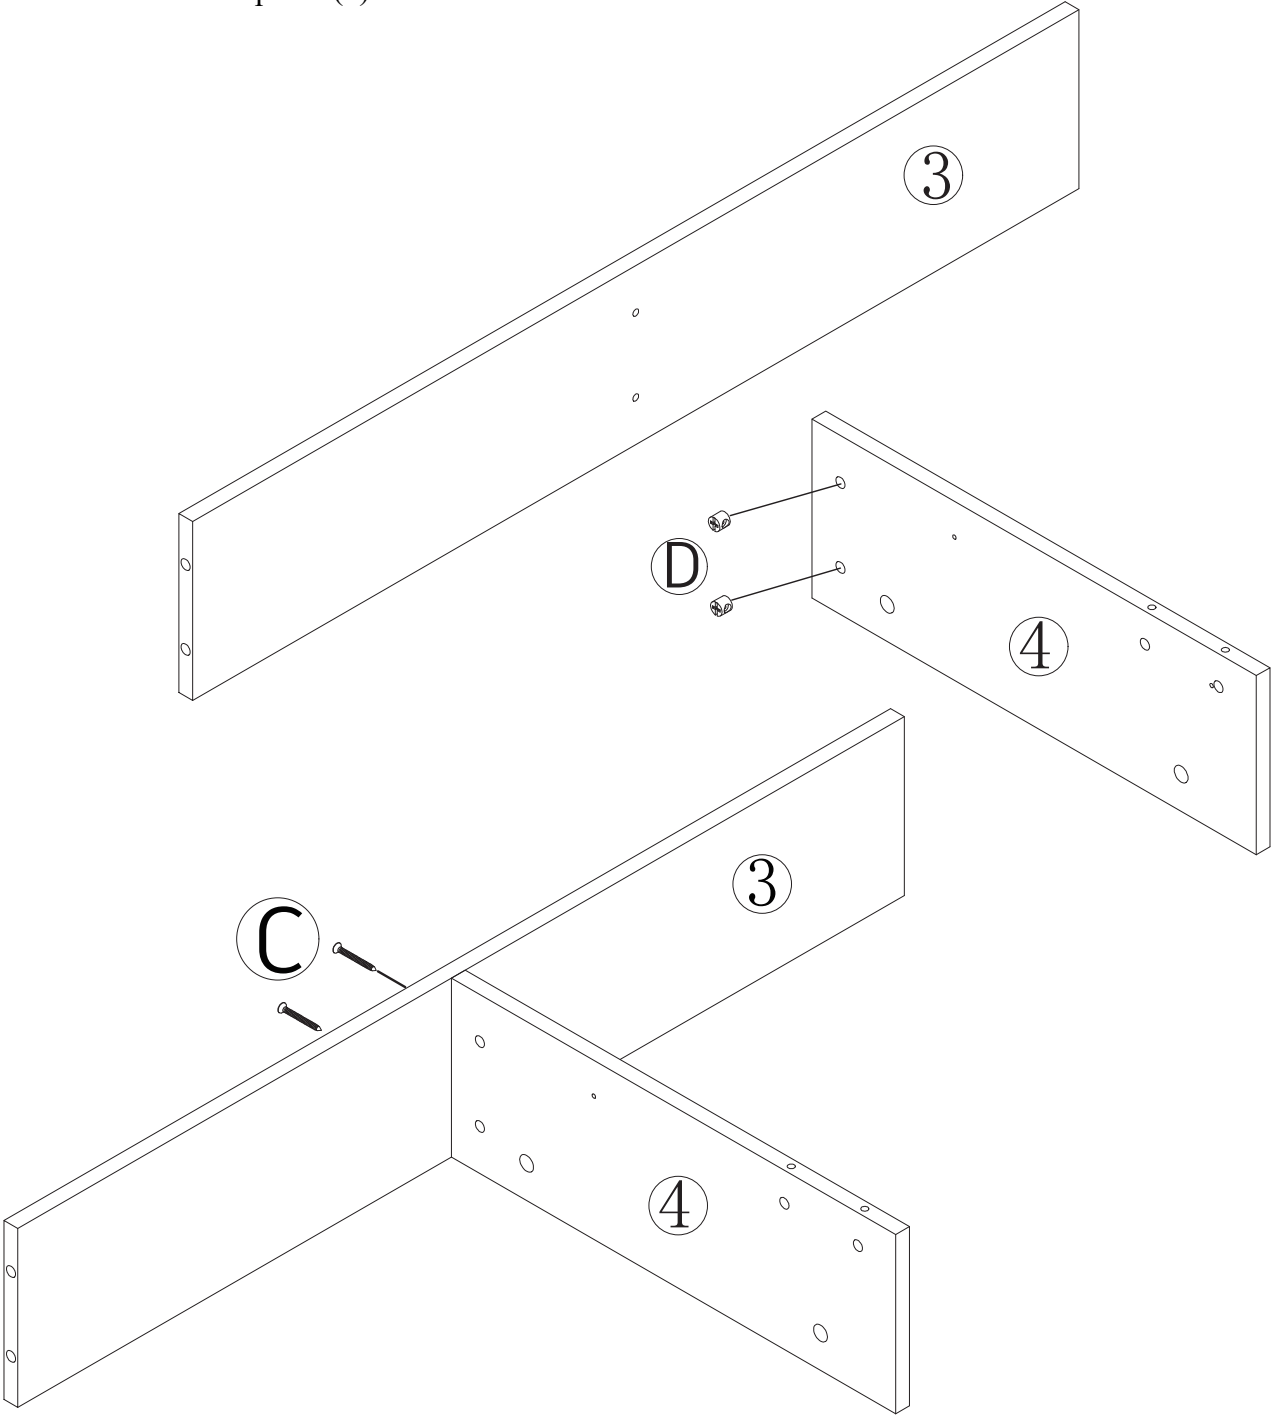		
---	---	---







Install

13

C x 2  Ø4 x 40 mm	D x 2  Ø10 x 9 mm	③ x 1 ⑤ x 1 ④ x 1		
--	--	-----------------------------	---	---





Insert Part (D) into panel (4). Use screw (C) to pass through the holes in panel (5) and screw into panel (4).

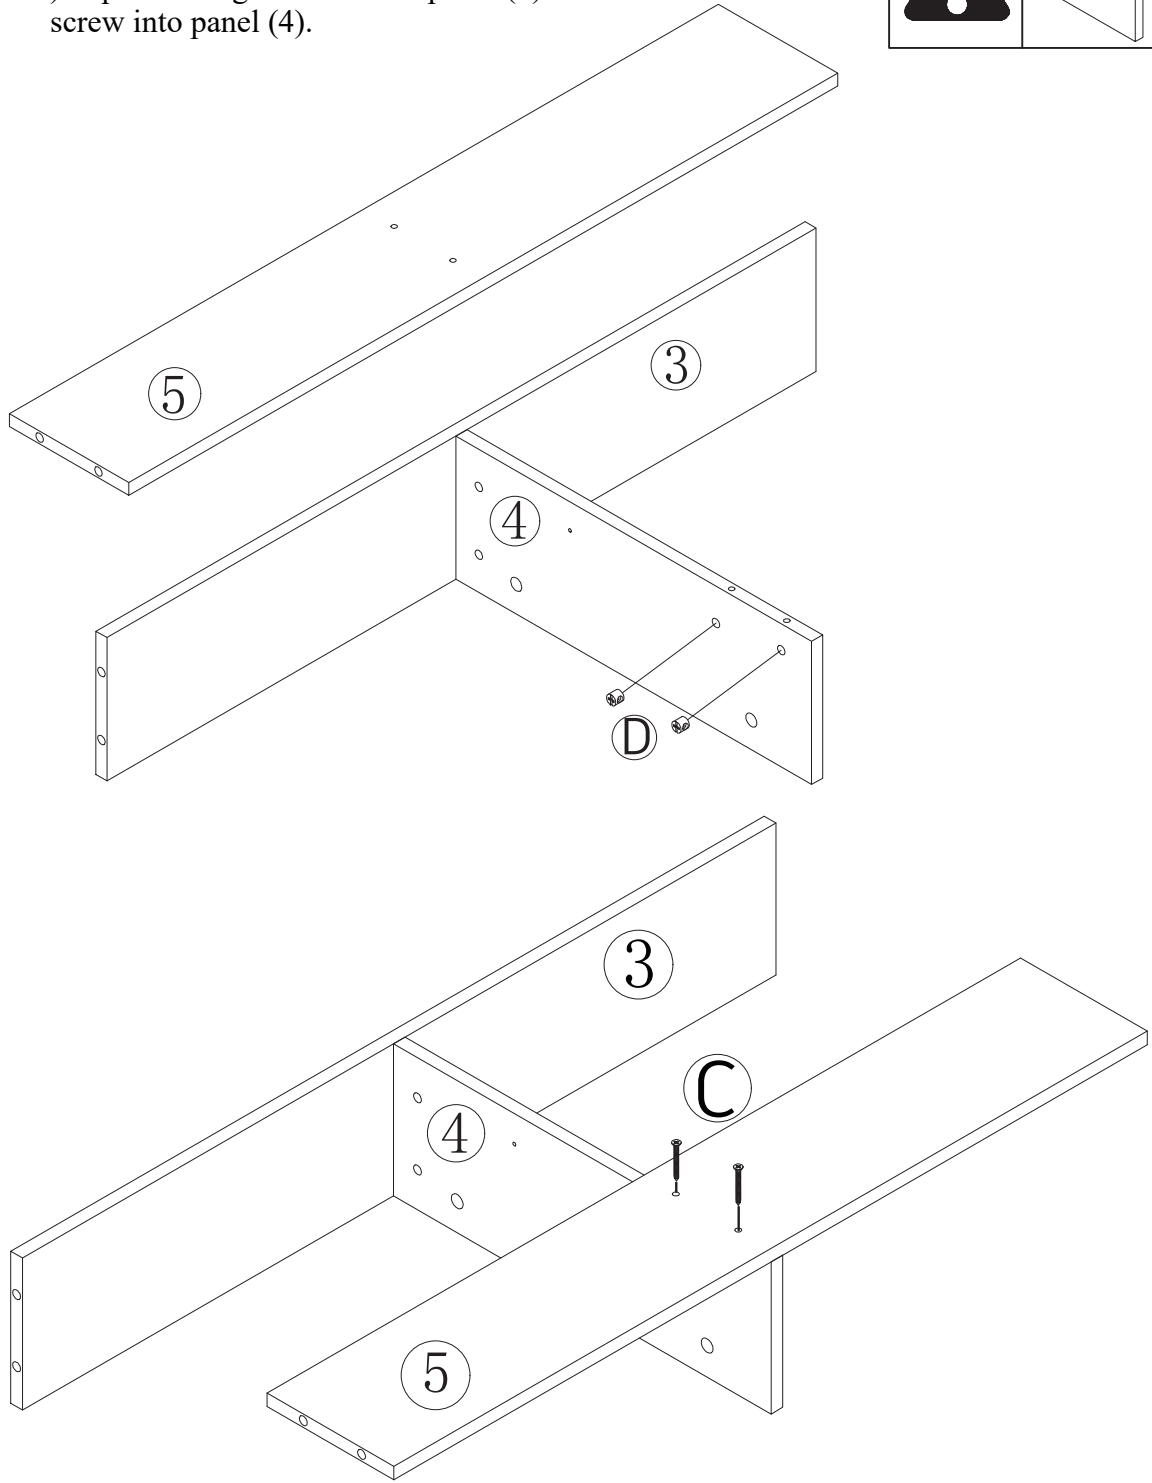		
---	---	---







Install

14

<p>C x 2</p>  <p>Ø4 x 40 mm</p>	<p>D x 2</p>  <p>Ø10 x 9 mm</p>	<p>⑥ x 1</p> <p>⑦ x 1</p>		
--	--	---------------------------	---	---




Insert Part (D) into panel (7). Use screw (C) to pass through the holes in panel (6) and screw into panel (7).

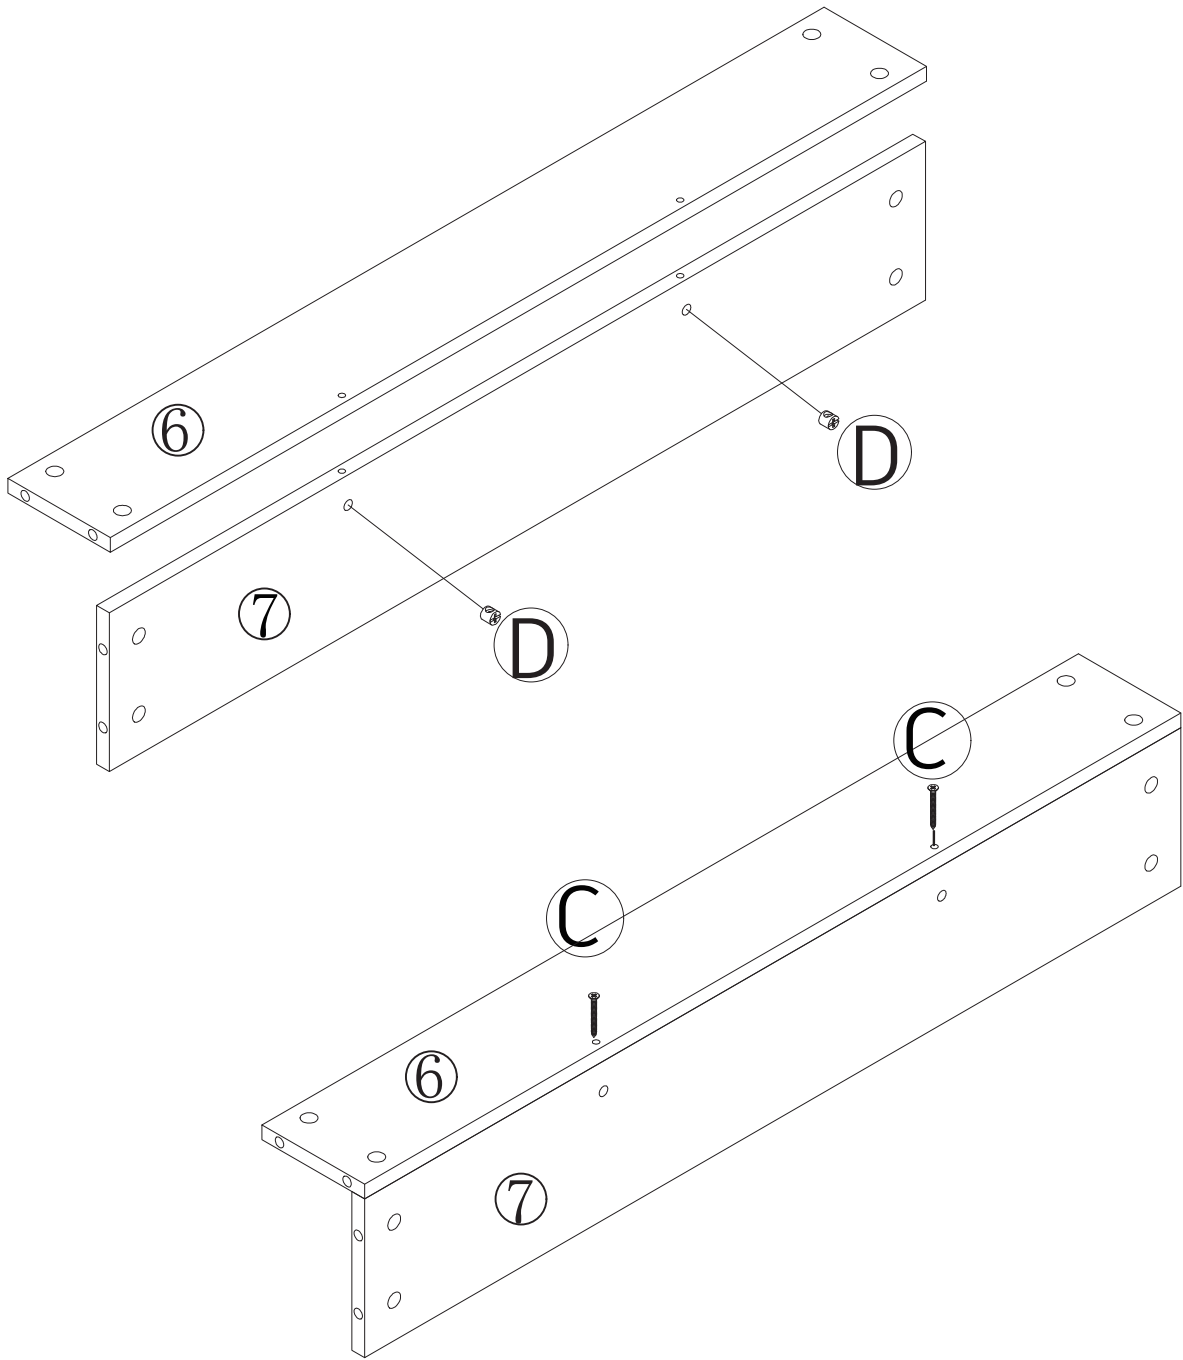		
---	---	---





Install

15



 B x 8 M12 x 10 mm	① x 1	④ x 1	⑥ x 1	 
	③ x 1	⑤ x 1	⑦ x 1	

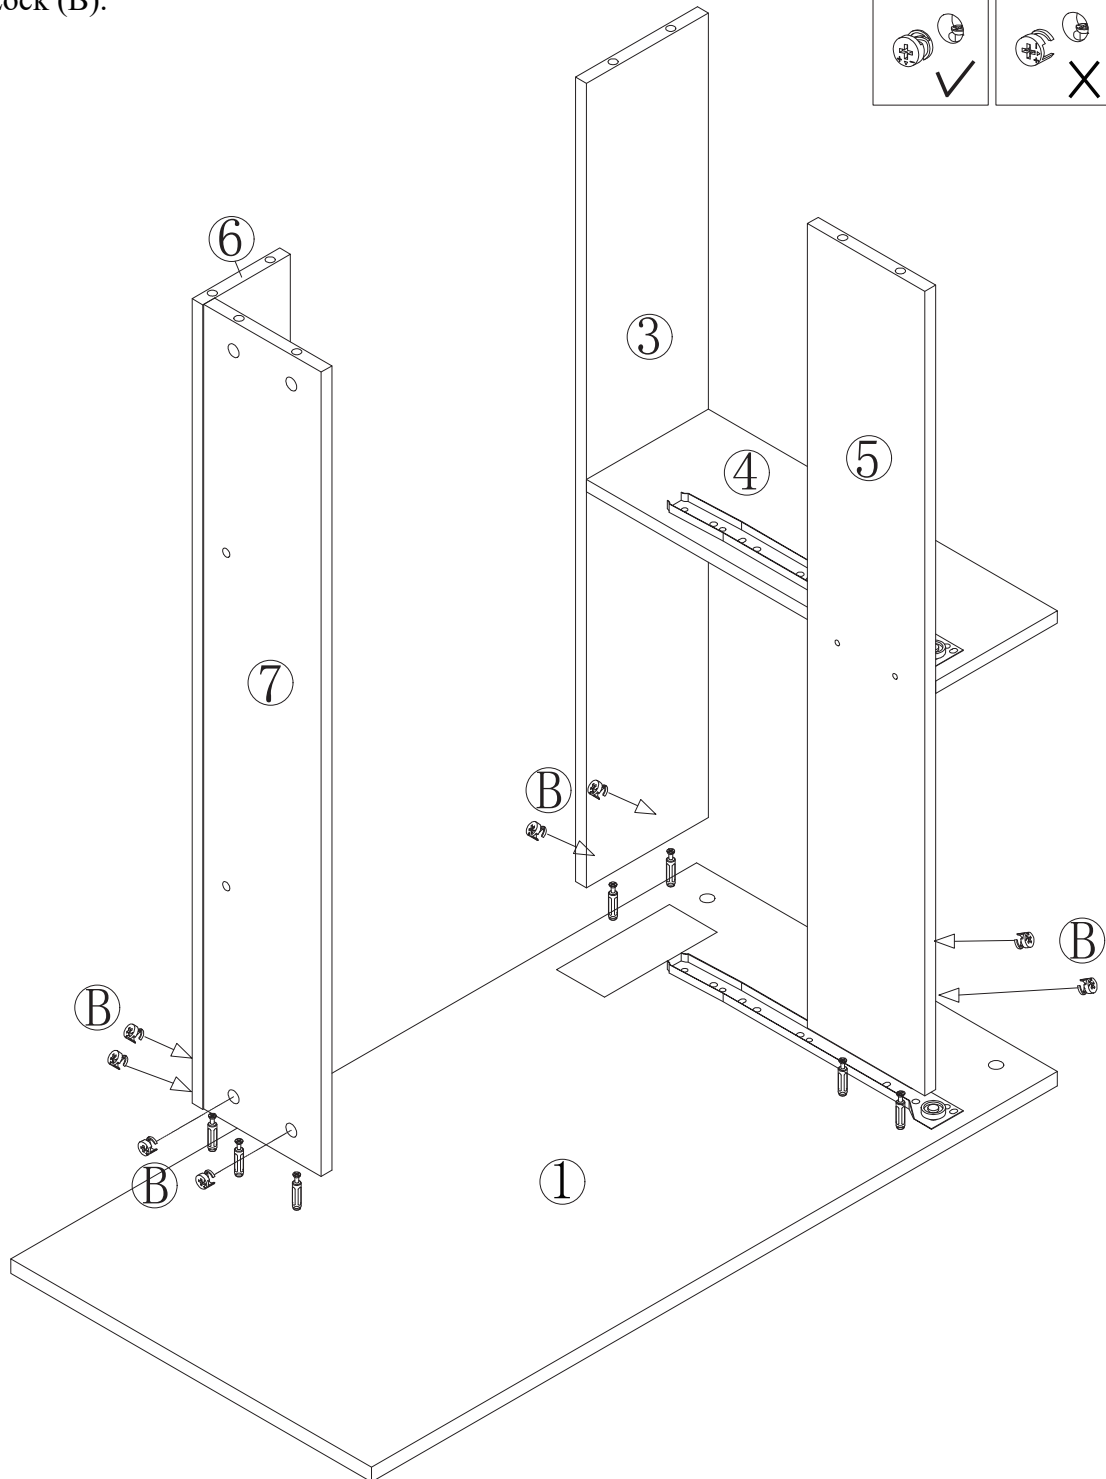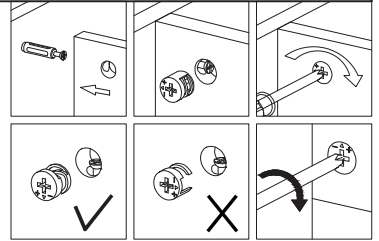Align Screw (A) on Panel (1) with the holes in the assembled parts in Step (14) and Step (15). Secure it in place with Cam Lock (B).





Install

16



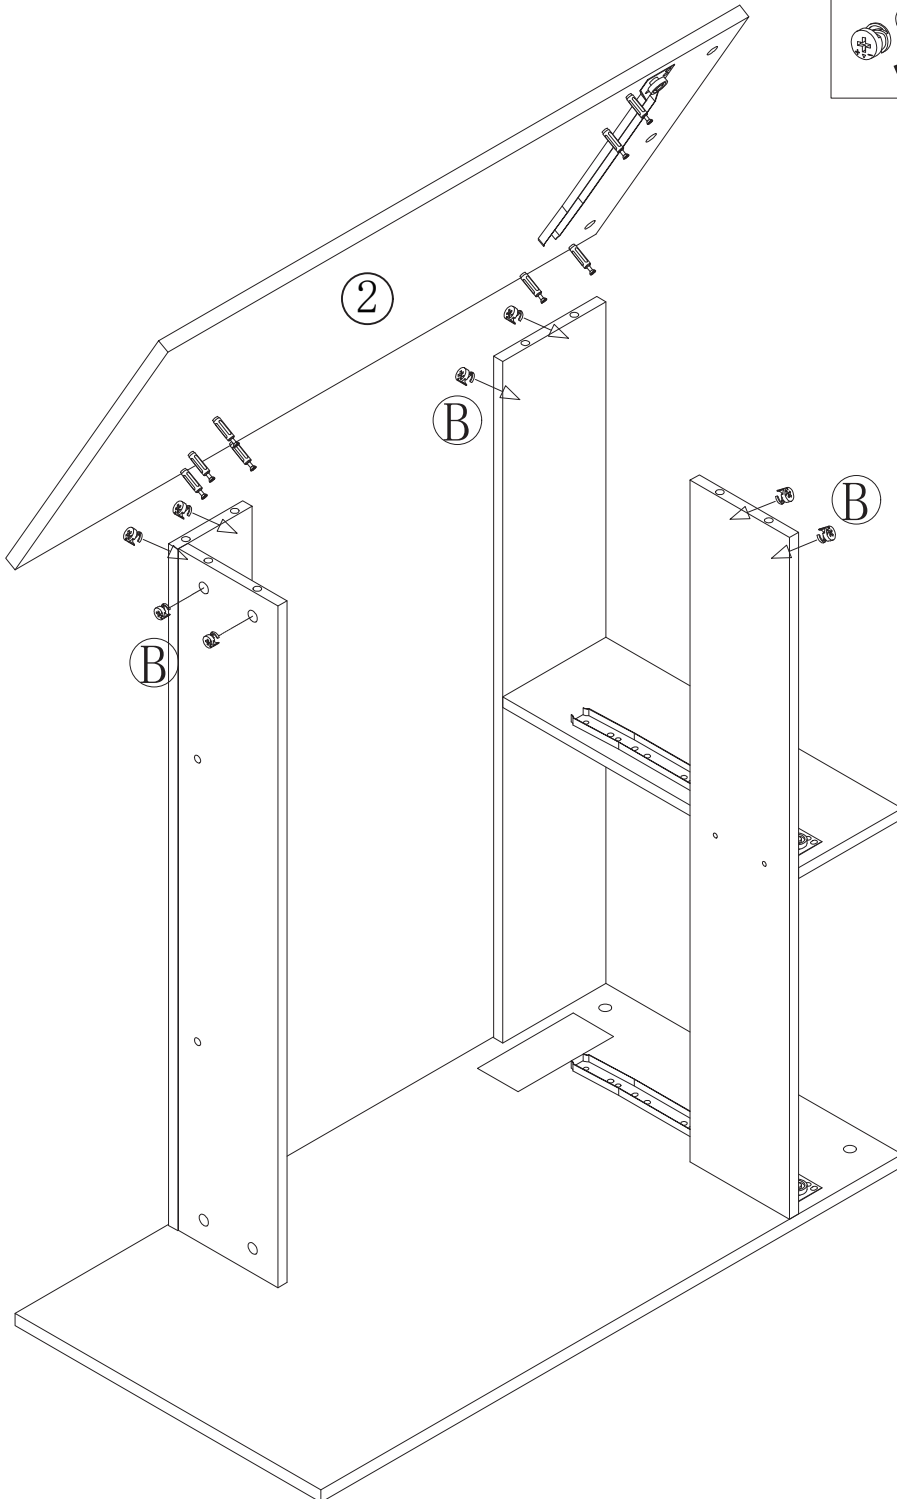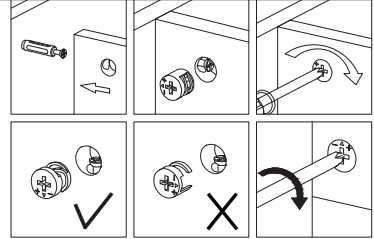


<p>B x 8</p>  <p>M12 x 10 mm</p>	<p>2 x 1</p>		
---	--------------	---	---




Align Screw (A) on Panel (2) with the holes in the parts assembled in Step 16. Secure it in place with Cam Lock (B).



Install

17



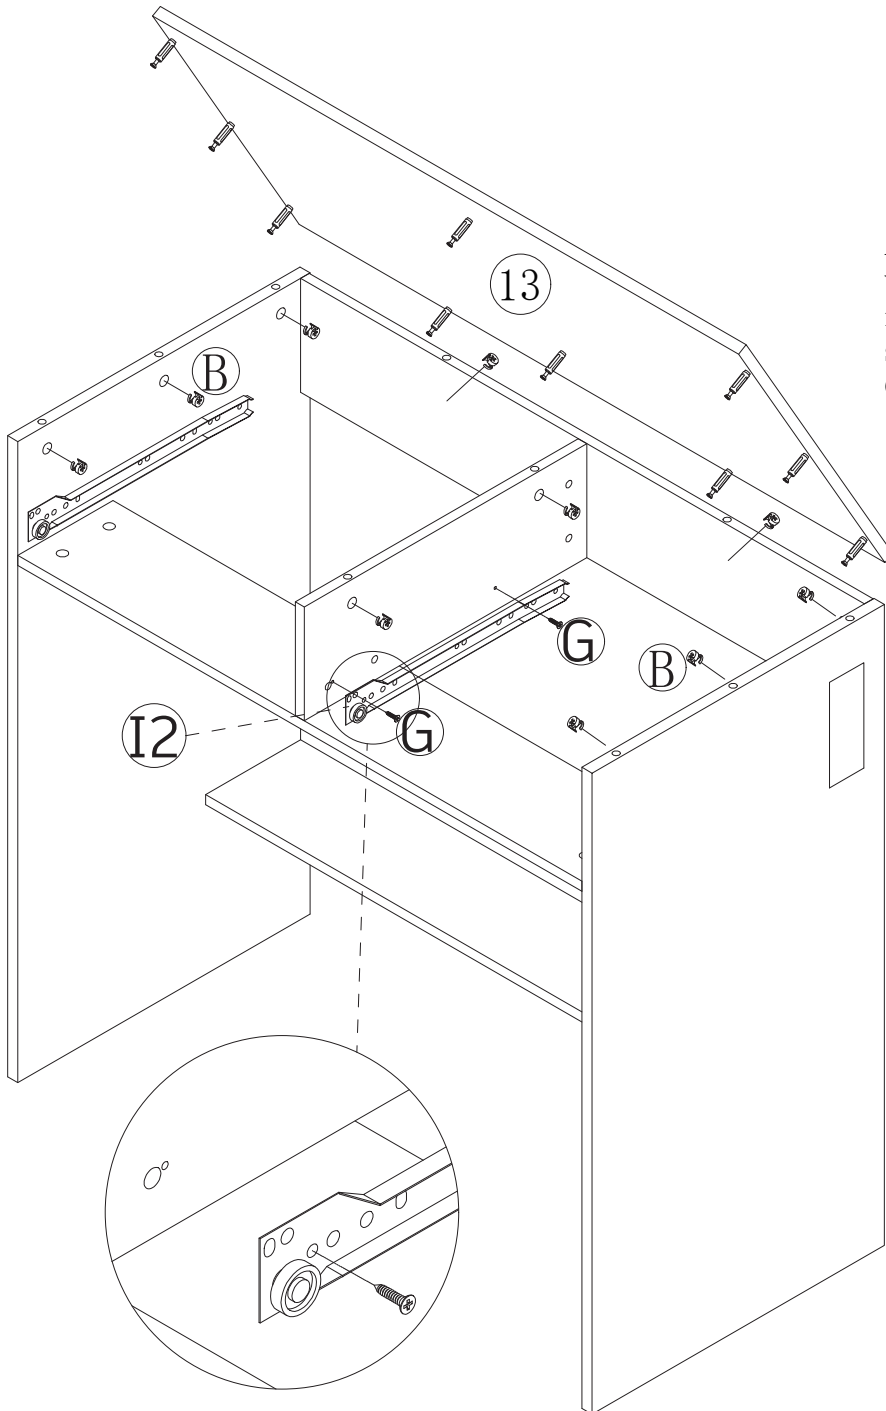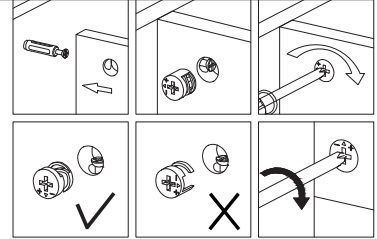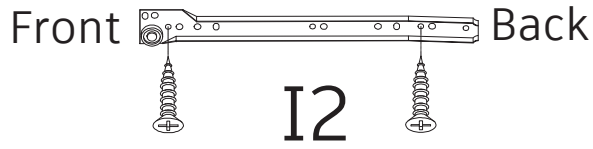
<p>B x 10</p>  <p>M12 x 10 mm</p>	<p>G x 3</p>  <p>Ø3.5 x 12.5 mm</p>	<p>I2 x 1</p>  <p>I2</p>	<p>2 x 1</p> <p>13 x 1</p>	 
--	--	---	----------------------------	---





Align Screw (A) on Panel (13) with the hole as shown in the illustration. Cover the Panel and secure the screws in place with Cam Lock (B).

Install

18




B x 8  M12 x 10 mm	(14) x 1 (15) x 4		
---	--------------------------	---	---

Align Screw (A) on Panel (14) with the holes in Panel (15) and secure it in place with Cam Lock (B).

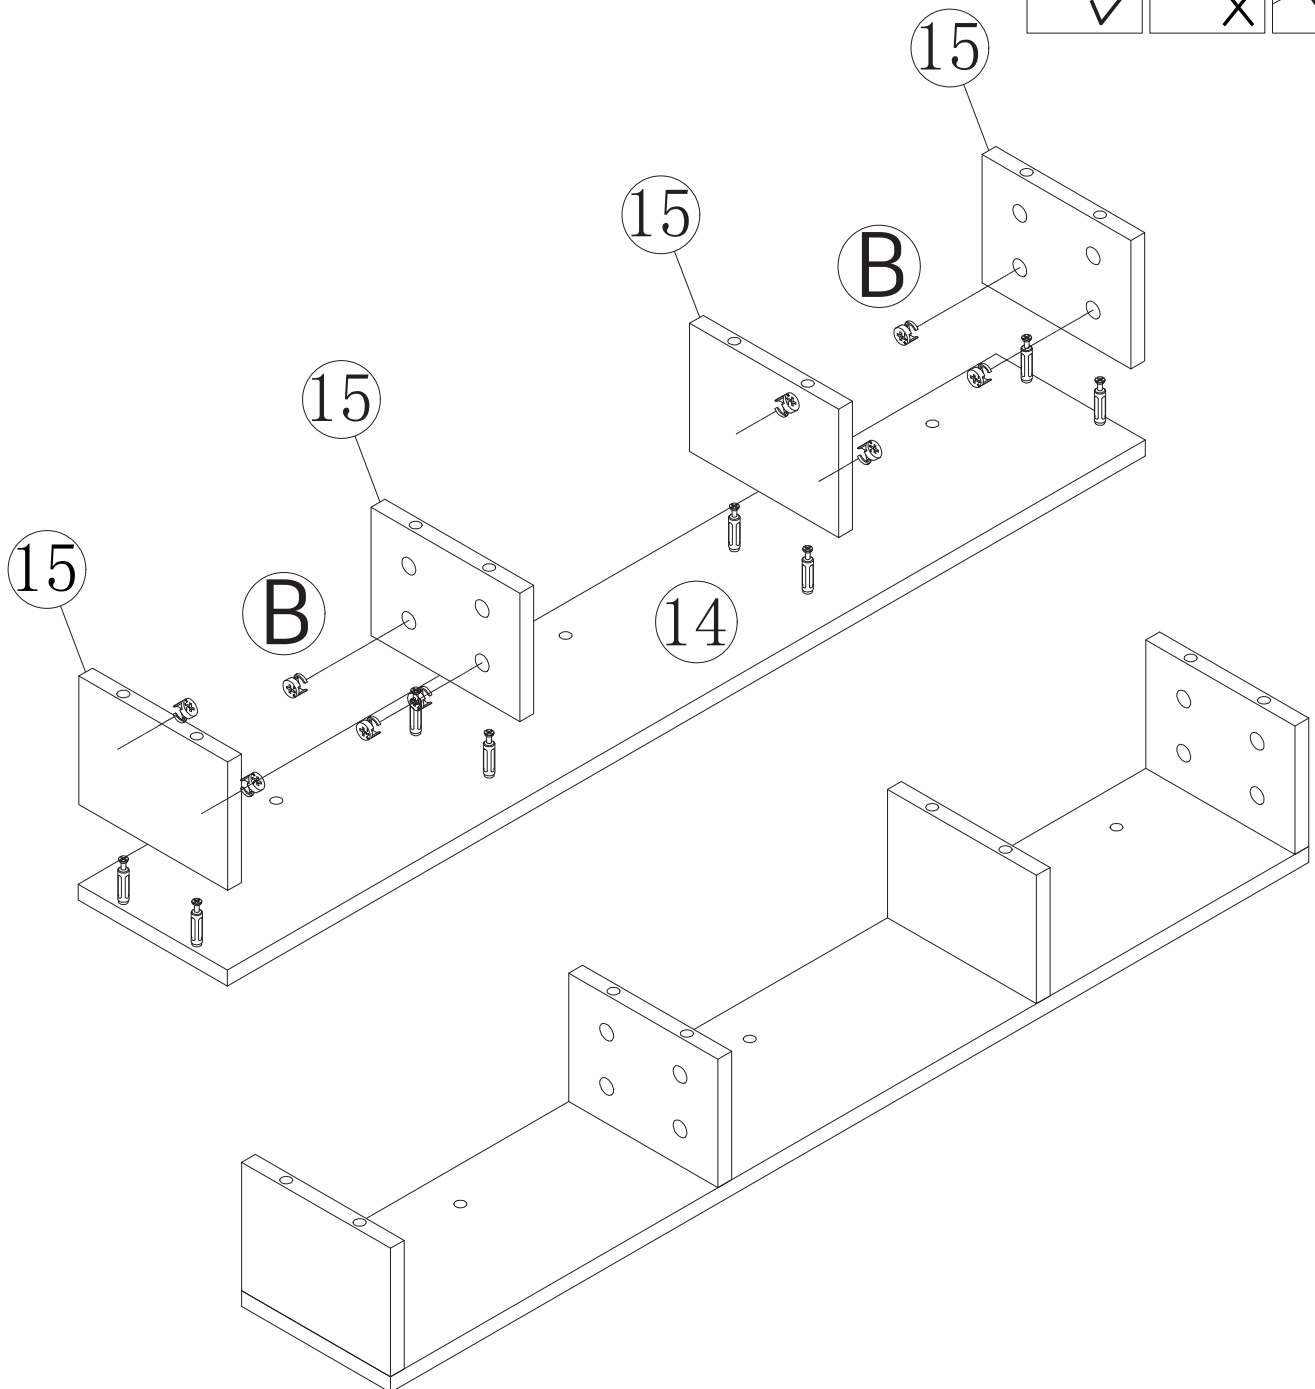
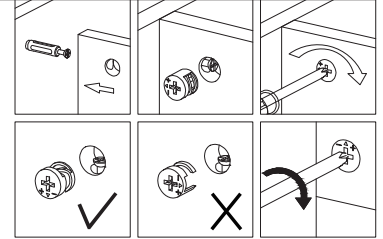


Install

19




<p>C x 3</p>  <p>Ø4 x 40 mm</p>	<p>D x 3</p>  <p>Ø10 x 9 mm</p>	<p>(14) x 1</p> <p>(16) x 1</p>		
--	--	---------------------------------	---	---

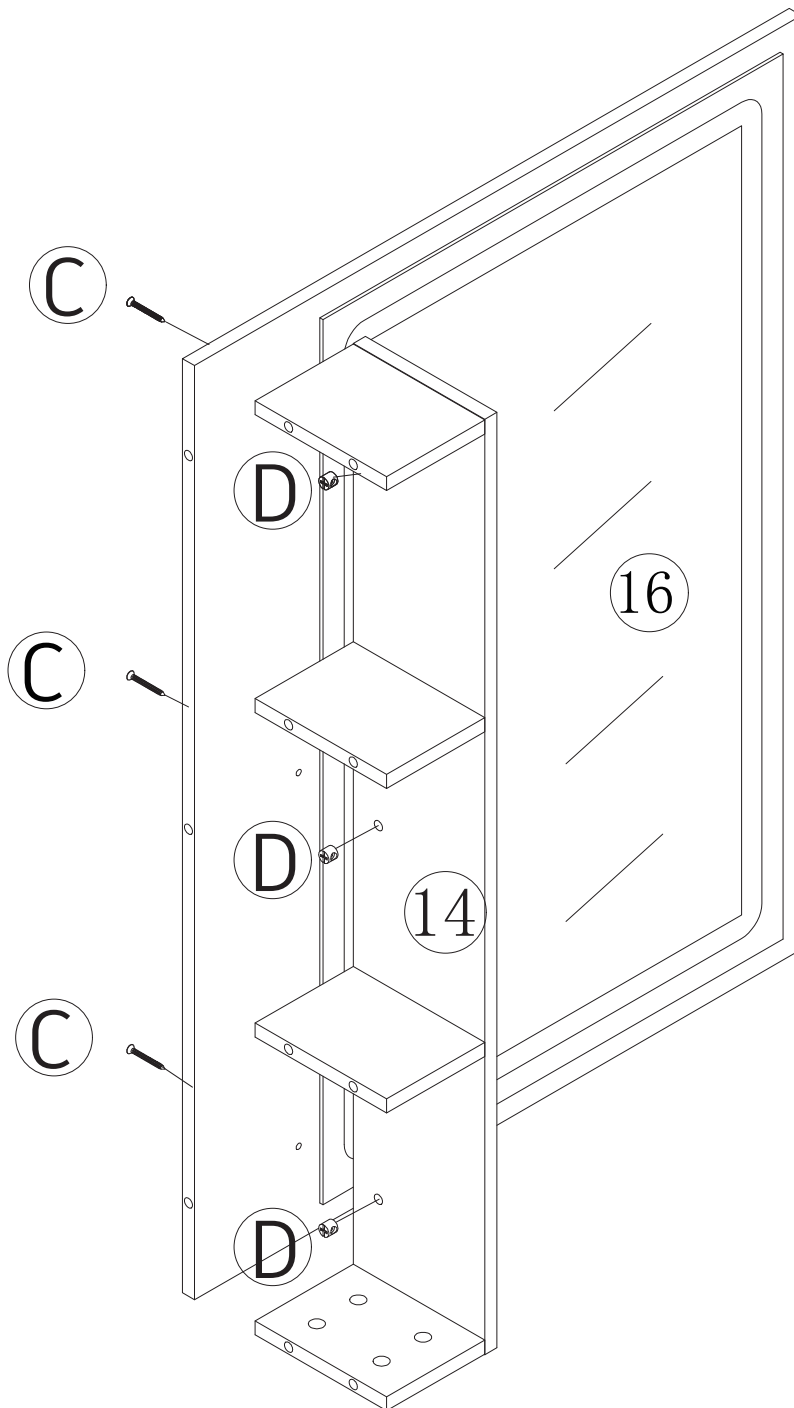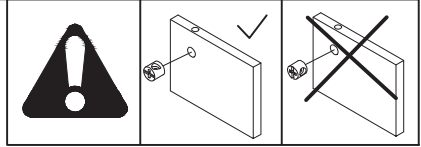Insert the Parts (D) into Panel (14). Use Screw (C) to pass through the hole in Panel (16) and insert it into Panel (14) and securing it with Parts (D).





Install


20

<p>B x 11</p>  <p>M12 x 10 mm</p>	 
--	---

Align the hole on assembled components from Step 19 with Screw (A) on Panel (13). Insert them and secure with cam lock (B) in the corresponding position.

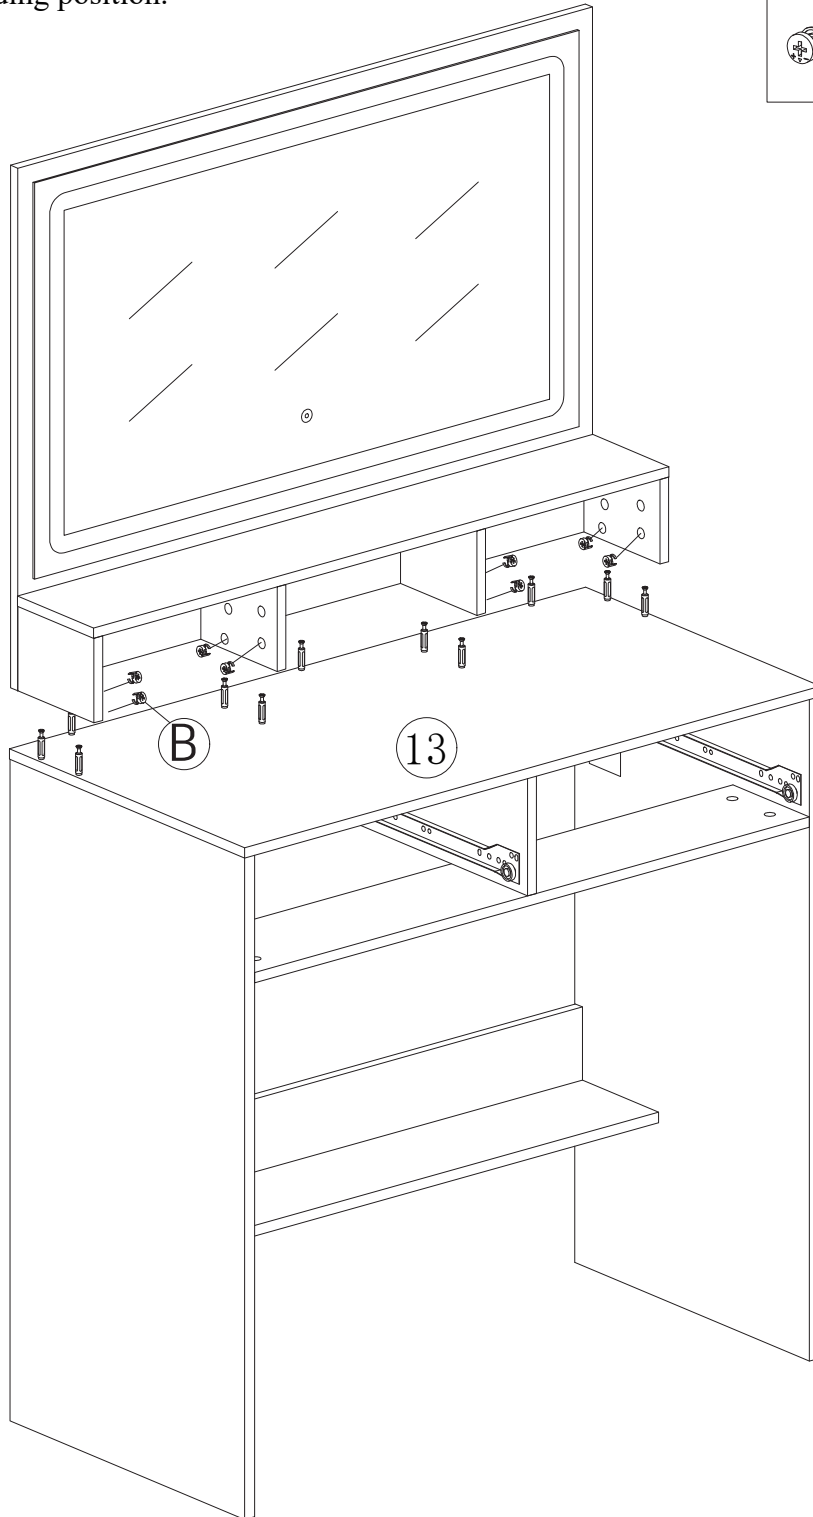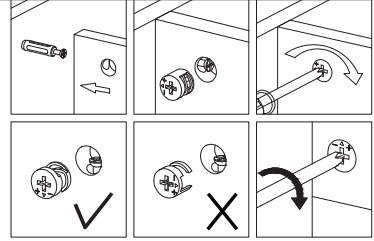


21

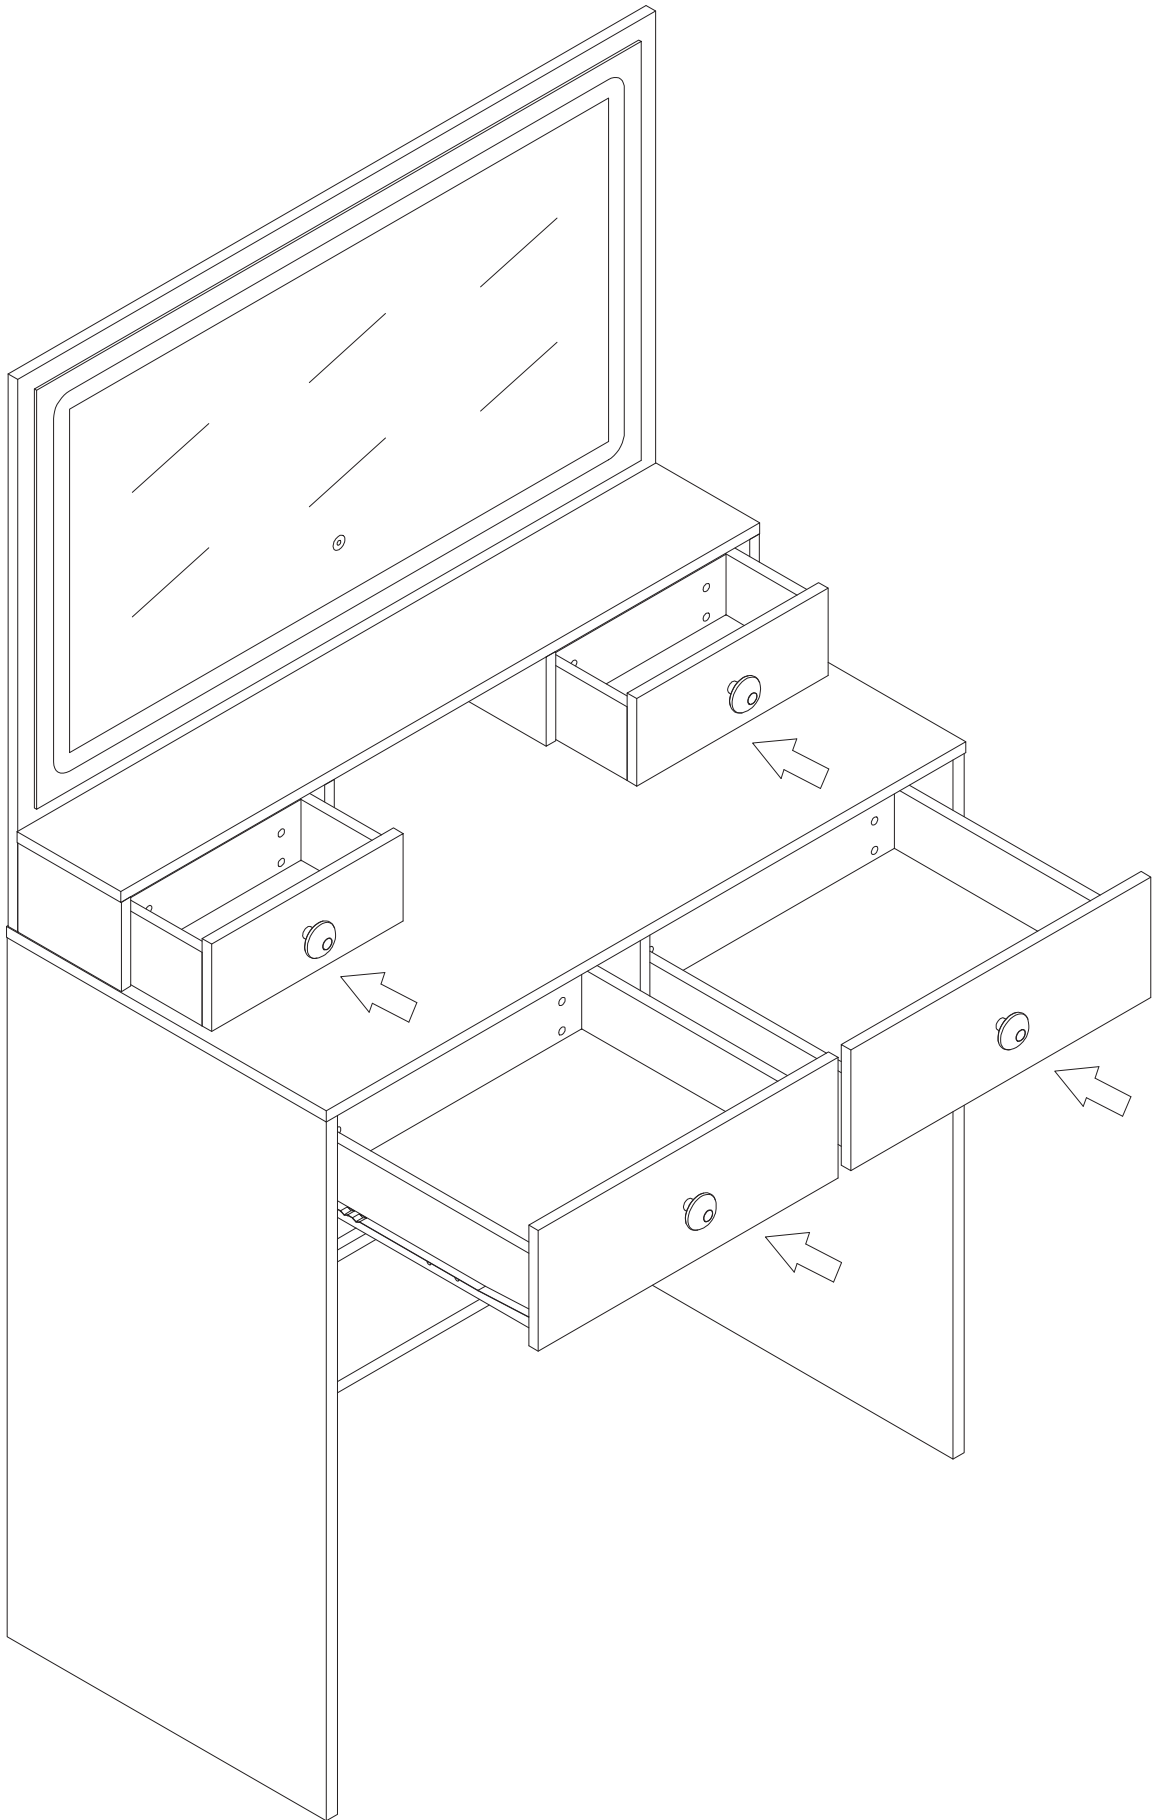


Install

22



<p>G x 2</p>  <p>Ø3.5 x 12.5 mm</p>	<p>H x 1</p> 	<p>L x 1</p> 		
--	--	--	---	---

Install Power Strip (H) and secure it in place with Screws (G).
USB connector can be plugged into the power USB port.


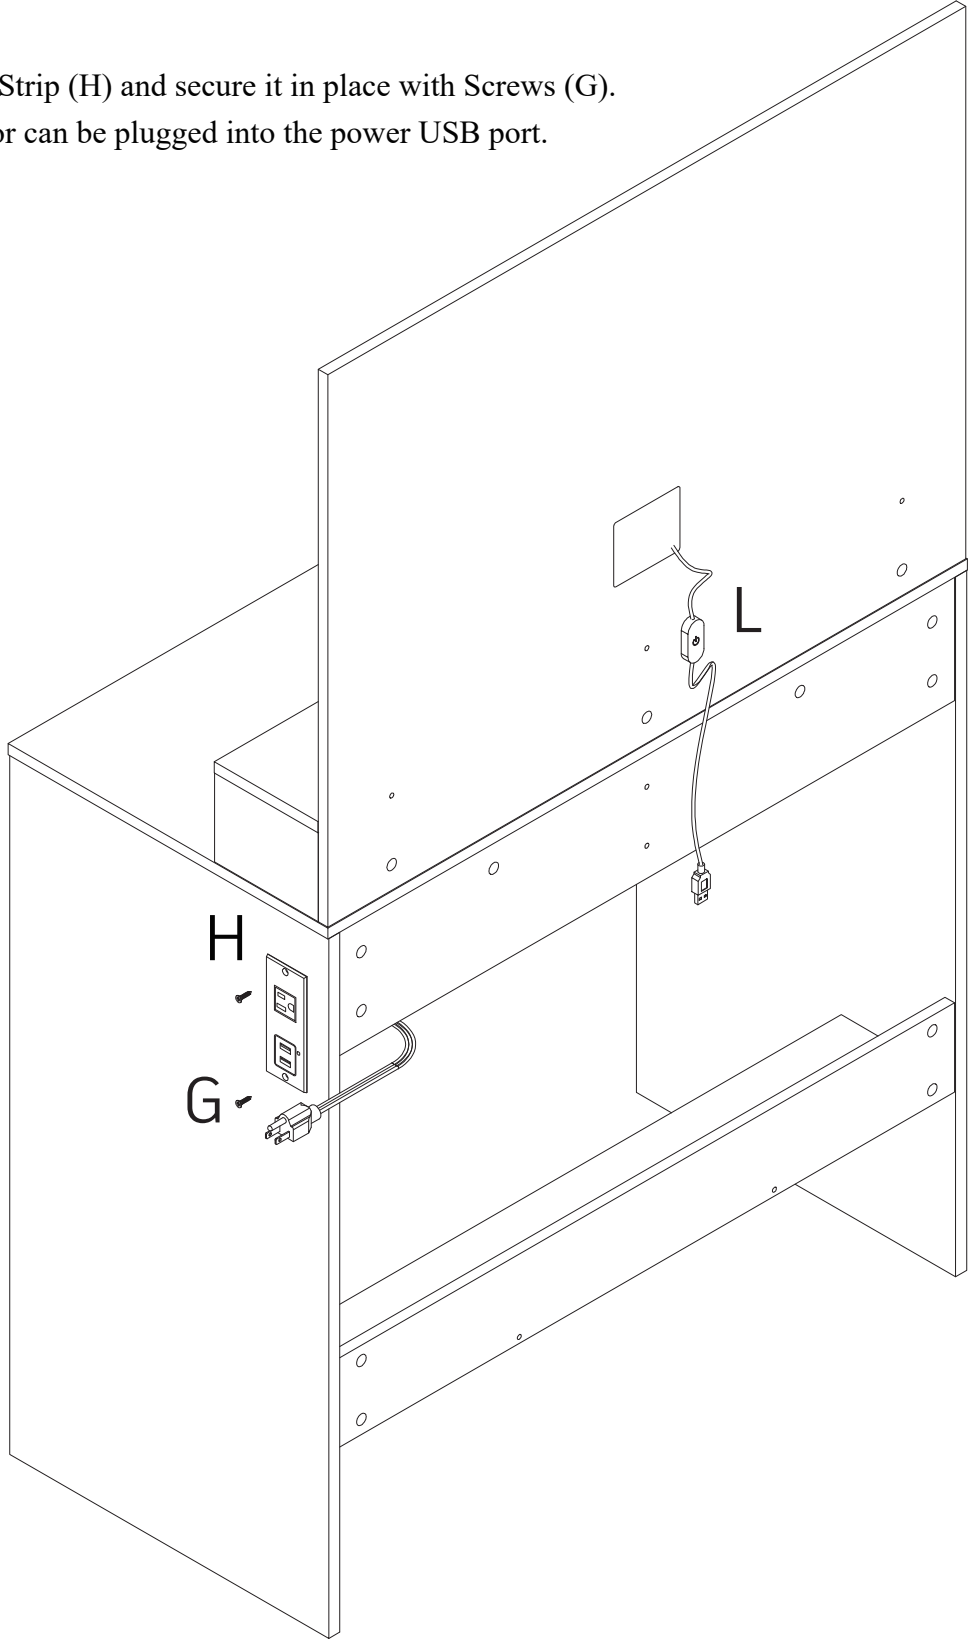


Install

23

B x 4  M12 x 10 mm	(23) x 1 (25) x 1		
	(24) x 1		

Align Screw (A) on Panel (23) and Panel (24) with with the holes in the Panel (25) and secure it in place with Cam Lock (B)

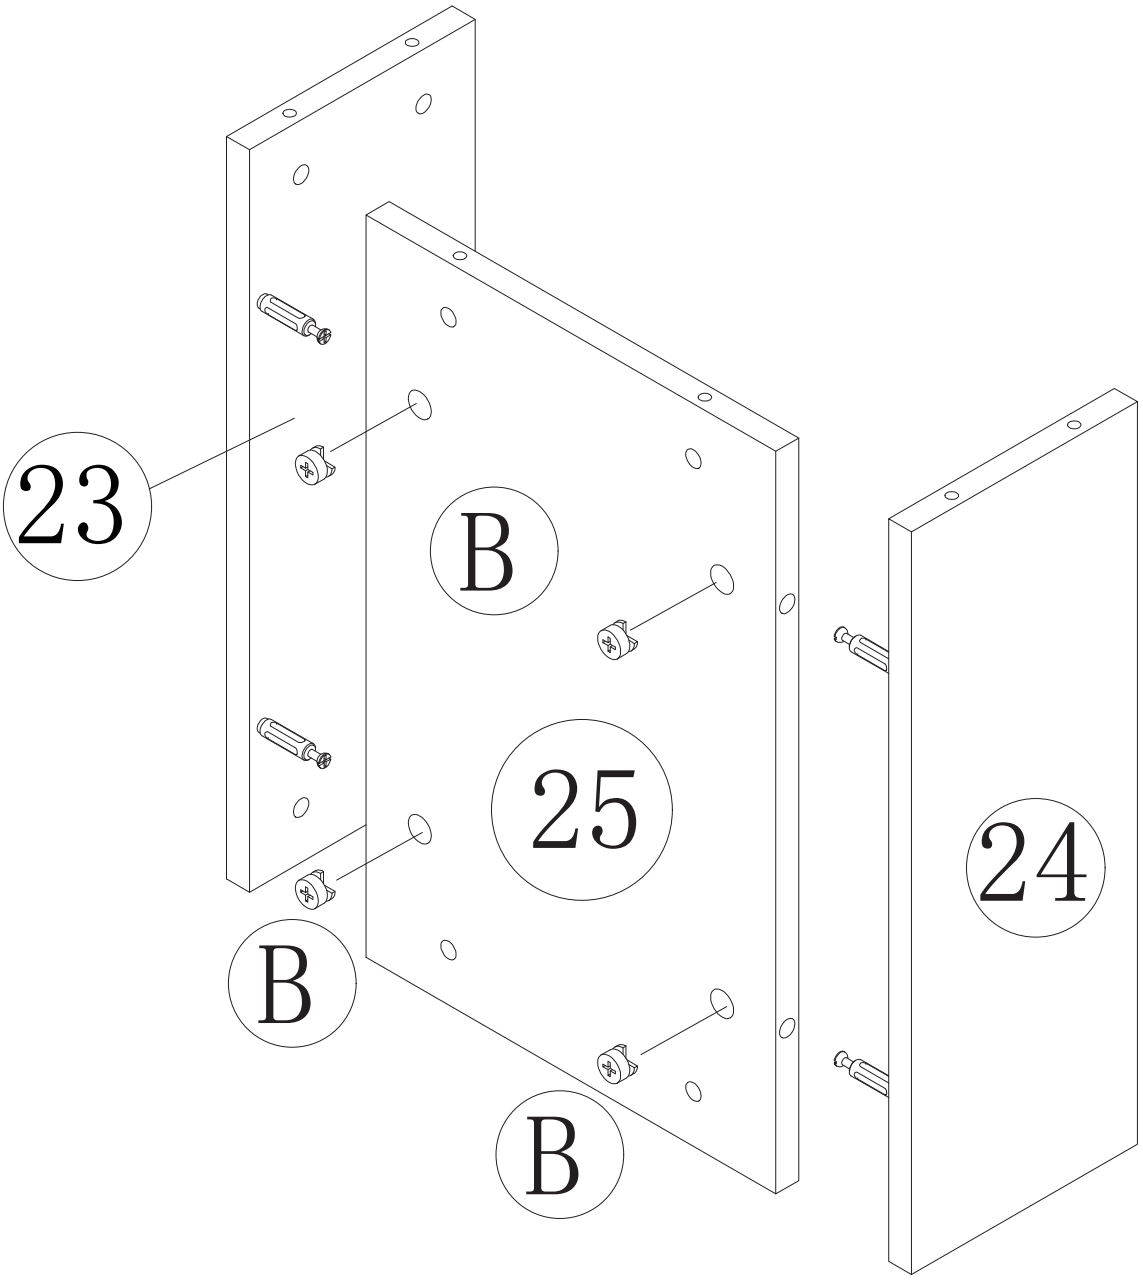
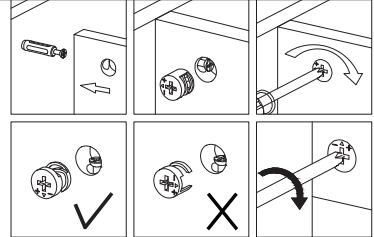


Install

24




C x 12  Ø4 x 40 mm	D x 12  Ø10 x 9 mm	(22) x 2	 
---	---	----------	--

Insert the Parts (D) into Panel (23), (24) and (25). Use Screw (C) to pass through the hole in Panel (22) and insert it into Panel (23), (24) and (25) and securing it with Parts (D).

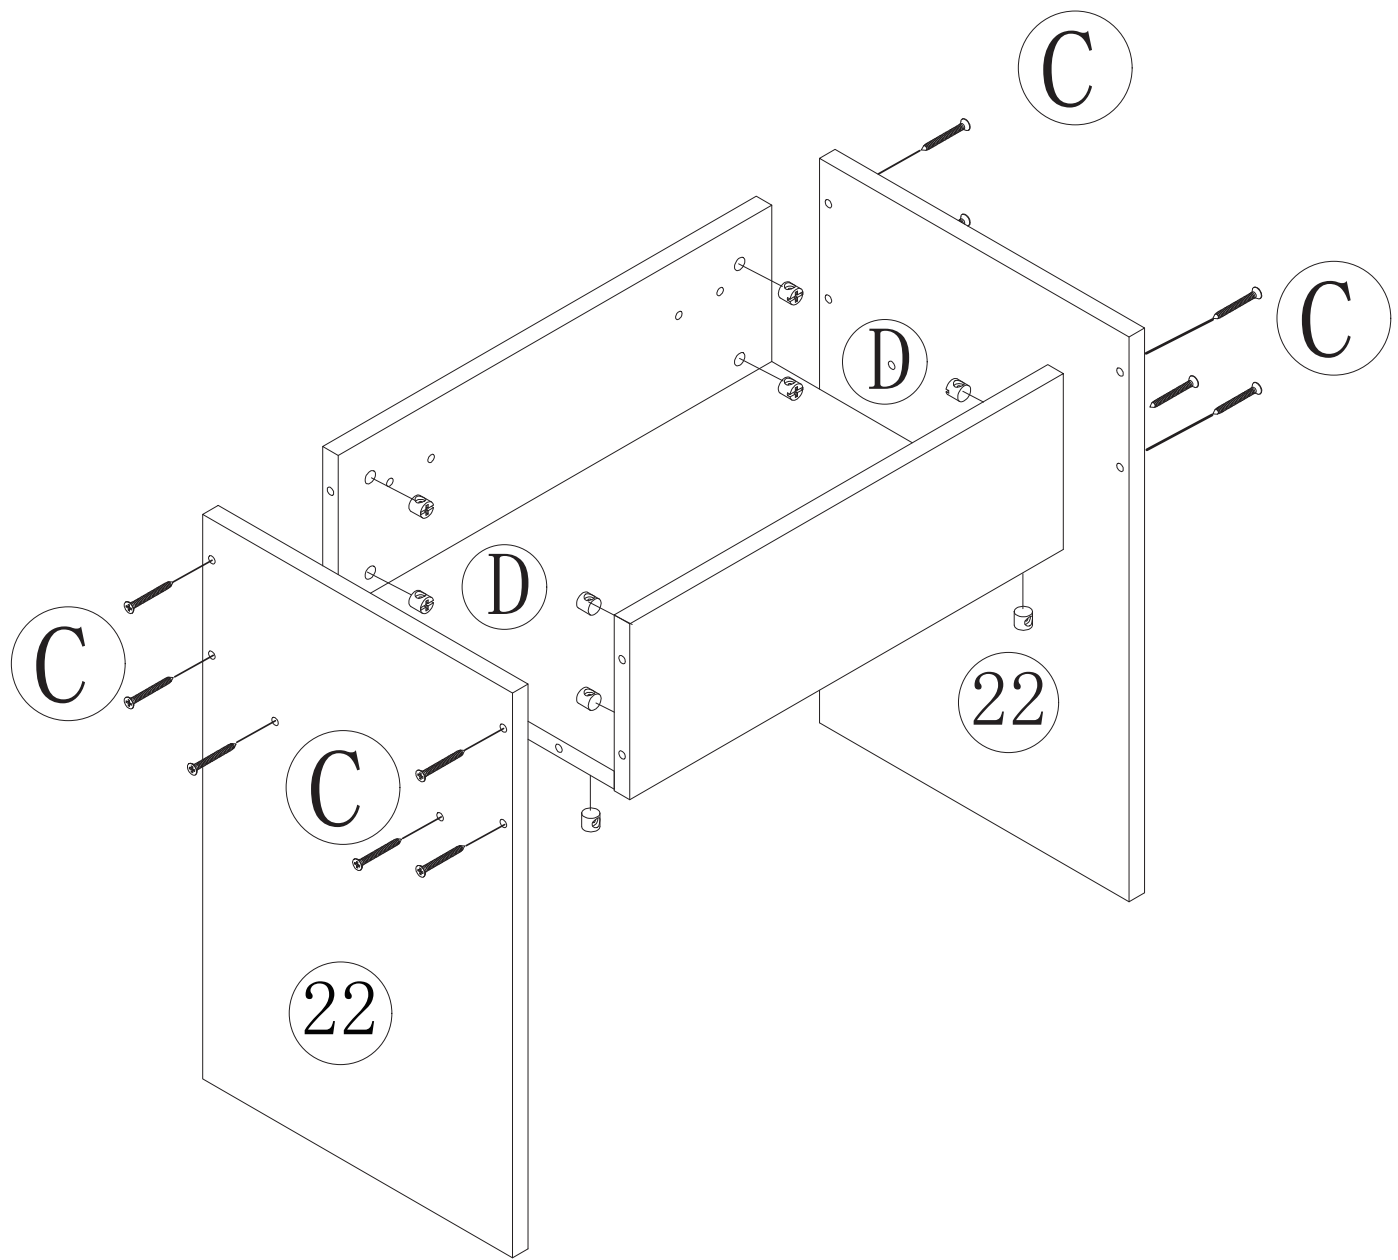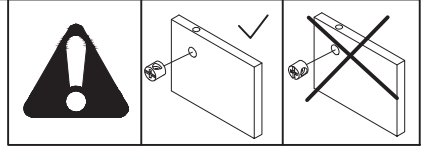


Install

25



Use Part (J) to connect Cushion (26) to the assembly from Step (24), and secure it in place with Screws (G).

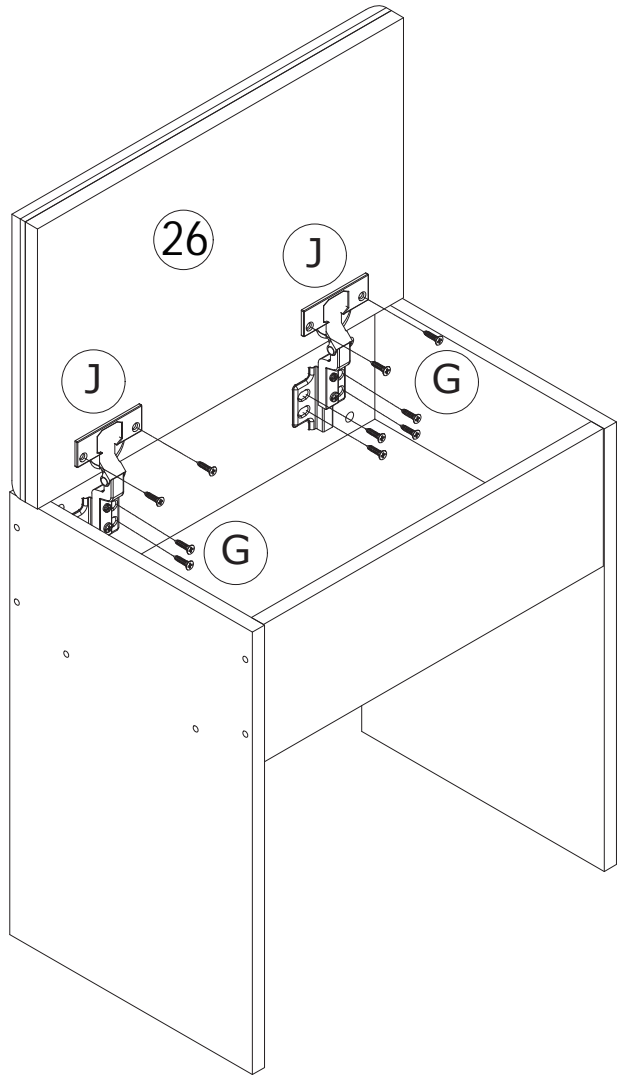

Three-Color Switching + Stepless Dimming Instructions

Turn On:

Press the button once to turn on the white light.

Switch Colors:

Click once again for warm light.

Click a third time for neutral light.

Dimming Control:

Long press the button to adjust brightness (stepless dimming) while on any color.

For each color (white, warm, neutral), you can long press to dim the light to your preferred level.

Turn Off:

Click once more to turn off the light.

