

Installation Instructions


Wall sconces

IMPORTANT

- recommends that a licensed electrician install this lighting fixture
- Installation must comply with all building, safety, and electrical codes and requirements
- Disconnect power to the junction box prior to installation
- Do not reconnect power until this fixture is properly installed
- This fixture is designed to mount to a standard metal 4-0 octagonal junction box

IMPORTANT: Wet Location Fixtures Only

- Wet location fixture must be sealed to mounting surface (wall) using high-quality 20-year silicone sealant. Approximately two (2) fluid ounces of silicone will be required per fixture.
- Prepare surface for silicone sealant according to silicone sealant manufacturer's directions
- Mounting surface must be flat. Shingles and heavy relief textures such as stone surfaces must be modified to insure a waterproof seal around perimeter of fixture.
- Bisque (unfinished) fixtures must be painted with high-quality exterior grade paint and allowed to dry thoroughly prior to installation. (See enclosed Bisque Painting Instructions for details.)

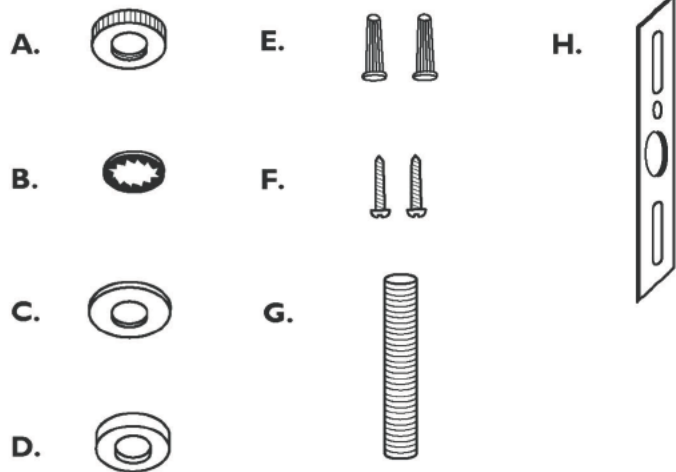

Hardware Pack contains:

- A. 1 - Brass Knurled Nut
- B. 1 - Lock Washer
- C. 1 - Metal Washer
- D. 1 - Rubber Washer
- E. 2 - Wire Nuts
- F. 2 - 3/4" long 8/32 Screws
- G. 1 - 3/4" Nipple
- H. 1 - Fixture Bar

I

Attach Fixture Bar (H) to junction box using two (2) 8/32 Screws (F).

