Manual Book

Chandelier Light

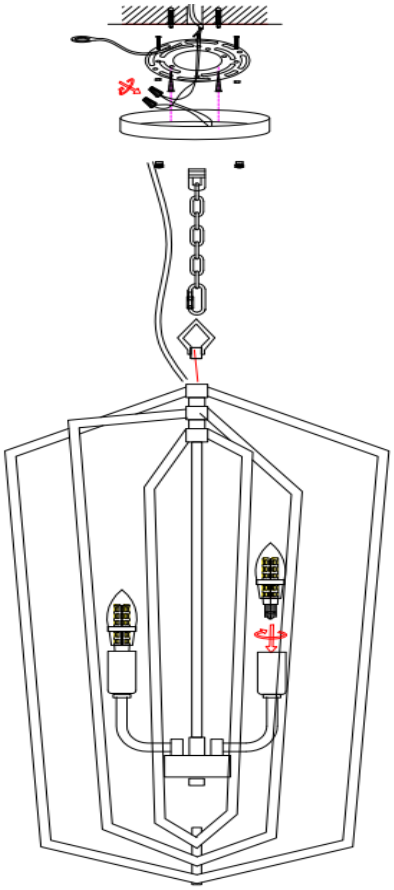

Safety Rules

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS
CAUTION: Before assembling the lighting fixture, refer to the section titled Wiring Connections. If you feel you do not have enough electrical wiring experience, either refer to a do-it–yourself wiring handbook or have your lighting fixture installed by a qualified, licensed electrician.

INSTALLATION & OPERATION INSTRUCTIONS GENERAL
Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

1. Tools You Need

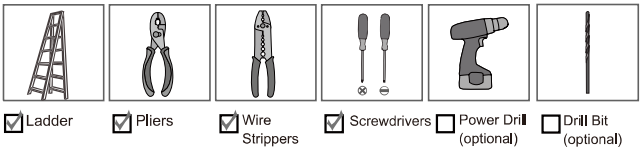



Fig. 1



Fig. 2



Fig 3

1. Mount the Bracket
Take off screws from outlet box (A). Secure the mounting plate (B) onto the box with screws (C) taken off (Fig. 1).

2. Connect the Wires
Step 1: Adjust the chain and fixture wires to get a proper height.
Step 2: Connect the fixture wires (E) to the house wires (G), black to live wire, white to neutral wire, green/yellow and green wire to ground wire. Wrap the connectors with electrical tape (H) separately.
Step 3: Spread apart the wires so that the live wires are on one side of the outlet box and the neutral wires are on the other side (Fig. 3).

3. Fix the Canopy
Fix the canopy (I) onto the (B) with nut (J) provide
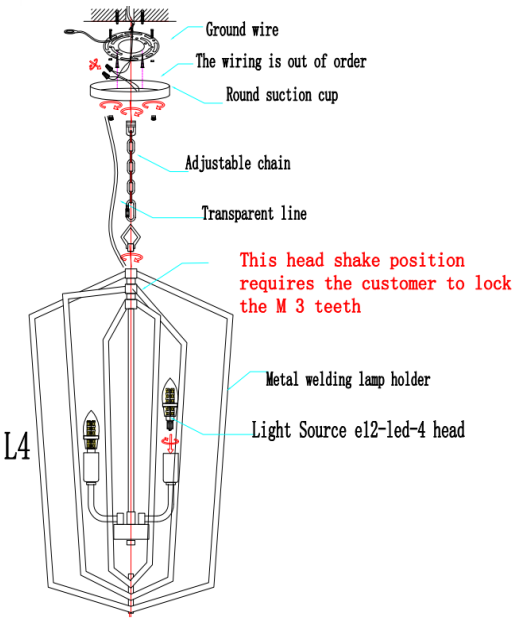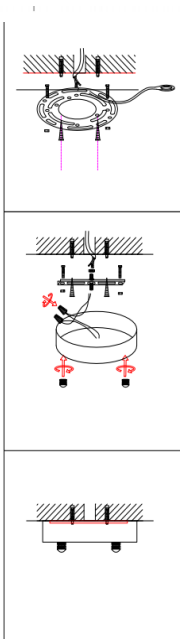
3. Fixture Assembly