
ASSEMBLY INSTRUCTIONS

TABLE

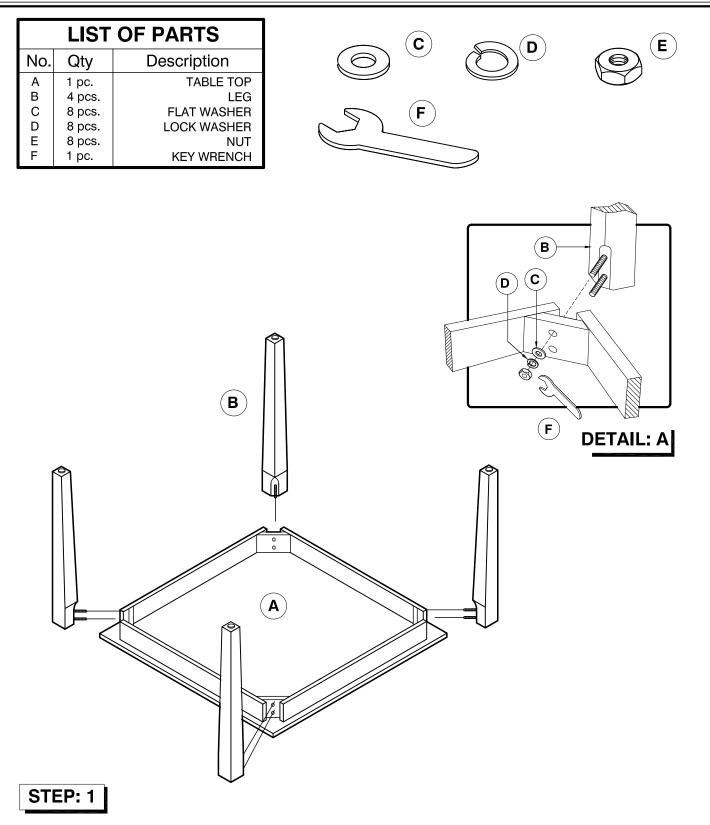

- PLACE TABLE TOP (**A**) UP-SIDE-DOWN ON CARPETING OR CARTON FOR PROTECTION.
 ALIGN AND PLACE 4 LEGS (**B**) INTO EACH CORNER OF TOP (**A**) AS SHOWN IN ILLUSTRATION.
 PLACE FLAT WASHER (**C**), LOCK WASHER (**D**) AND NUT (**E**) INTO THE THREADED ON THE BOLT.
- FULLY TIGHTEN ALL NUTS (E) WITH THE PROVIDED KEY WRENCH (F) TURNING CLOCKWISE UNTIL SECURE. (SEE DETAIL: A)