




LAUREL LARGE & GRANDE PENDANTS

KWPD212; KWPD213

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



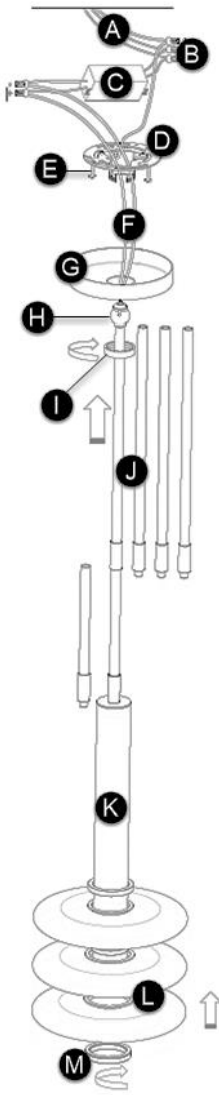

FIXTURE PARTS

- A. Power Line Wires from Junction Box (Not Illustrated) in Ceiling
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Screw Collar
- E. Mounting Screws
- F. Fixture Wires
- G. Canopy
- H. Half ball
- I. Collar nut
- J. Stem Assembly
- K. Fixture
- L. Glass Rings
- M. Shade Ring

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the canopy.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Determine the desired height of the fixture using the provided stem assembly and assemble the fixture accordingly:
 - a) Slide the canopy and collar nut onto the half ball and top stem.
 - b) Feed the fixture wires through each section of the stem assembly, screwing the sections together as each piece is added.
 - c) Once the desired height is reached screw the entire stem assembly to the top of the fixture.
 - d) Seat the half ball into the mounting plate ensuring no wires are being pinched.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire (negative to negative)
 - b) Positive (+) fixture wire to the positive (+) output driver wire (positive to positive)
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
5. Carefully tuck all the wires and wire-nut connections in between the canopy and the junction box.

III. Installing the Fixture

1. While supporting the fixture, lift and position the canopy into place against the mounting plate on the ceiling and secure it in place by screwing the collar nut tightly onto the collar.
2. Fit the glass rings onto the fixture and adjust the threaded ring to find the optimal positioning. Once the ideal fit is determined, remove the gasket tape and assemble the glass rings accordingly.
3. Screw the shade ring snugly in place to complete the installation.