
## **Product Manual**

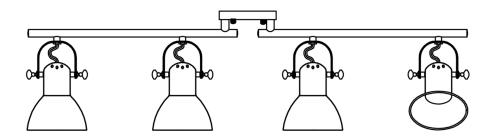

#### **Product Parameters**


| Product Model: 48293          | Bulb base: E26               |
|-------------------------------|------------------------------|
| Input Voltage: 110-130V, 60Hz | Switch Type: wall switch     |
| Color: black                  | Size: high9.8in *wide 36.6in |
| Material: metal               |                              |

### **Matters Needing Attention**

- 1.Rated voltage 110-130V, 60Hz.
- 2. Wear gloves when installing to avoid scratching, handle with care and place gently. Please do not hit the light to avoid damage and injury.
- 3. The fixtures shall not be close to acid, alkali and other corrosive chemicals and gases. Additionally, clean it with soft cloth in instead of much water.
- 4.Please do not put it in places with high humidity or high temperature.
- 5.To avoid the risk of electric shock, make sure the switch is off while installing, cleaning and replacing.
- 6.If you have questions about the installation of this product please consult a qualified electrician.

page 1 page 2

# 48293

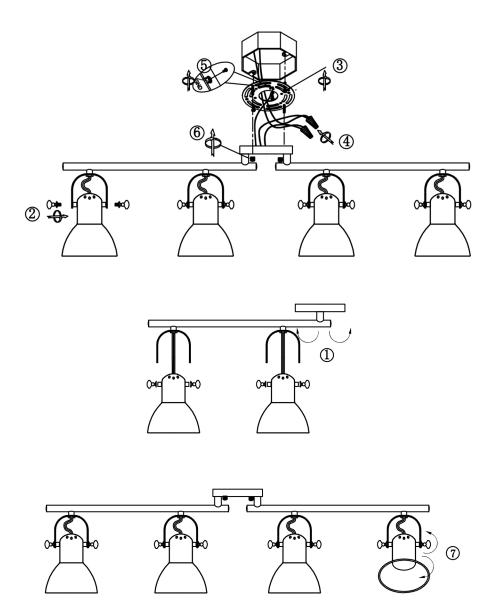

### **Installation Steps:**

[Notice]: Please cut off the power supply before installation. Installation Steps:

[Notice]: Please cut off the power supply before installation.

- 1 Unfold the two straight rods of the lamp body
- 2 Use fan-shaped screws to attach each of the five lampshades to the bracket
- (3) Use 2 long screws to install the hanging board on the ceiling.
- 4-5 Wire according to color classification. There are 3 wires in total: live wire, neutral wire and ground wire. Tighten the terminal cap to cover the connection. To advoid electric shock, please do not let the copper wire expose.
- 6 Install the lamp base on the hanging plate and tighten it with short screws on the left and right sides of the fixing device respectively.
- (7) Adjust the orientation of the lampshade to your liking
- (8) Install 4 E26 bulbs (Note: bulb is not included)
- (9). Turn on the power switch and verify that the luminaire is working properly.

page 3 page 4