




Note: male (A) should connect with female (A), male (B) should connect with female (B) (C with C, D with D).

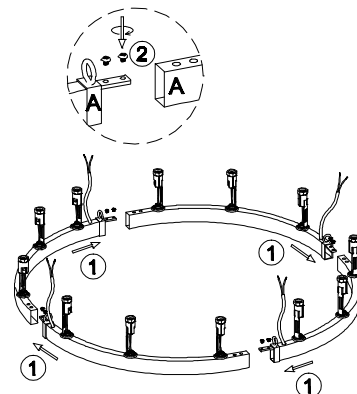


1. Assembled the split parts ① to a completely ring fixture like picture showed, pushed the split parts and fix with bolt screw ②.

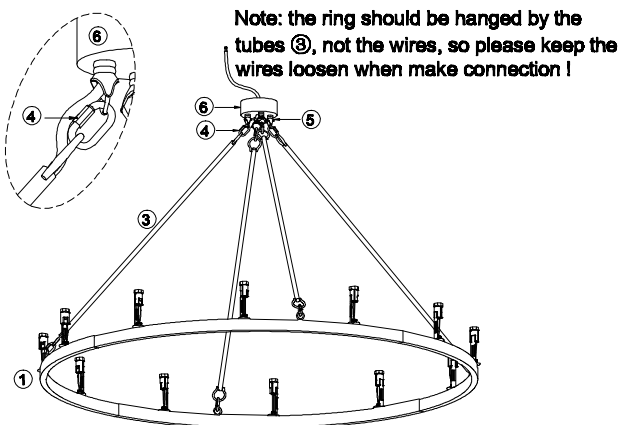


2. Let the wire go through the connected tube (3), hang the ring (1) to the junction box (6) with carabiner hook screw connection (4), let the wire go through the junction box (6).

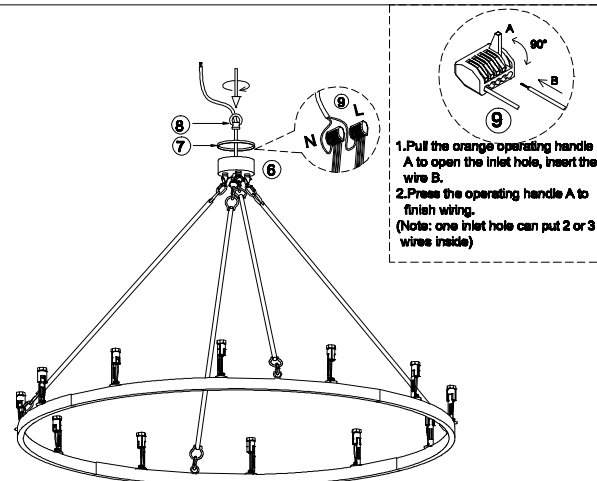

3. Connect all the wires by parallel with splicing connector (9) (all live line-L use one connector, and neutral Line-N use another connector).
4. Let the wire go through the cover (7) and hanging ring (8), rotate ring (8) to fix the cover (7) to the junction box (6).

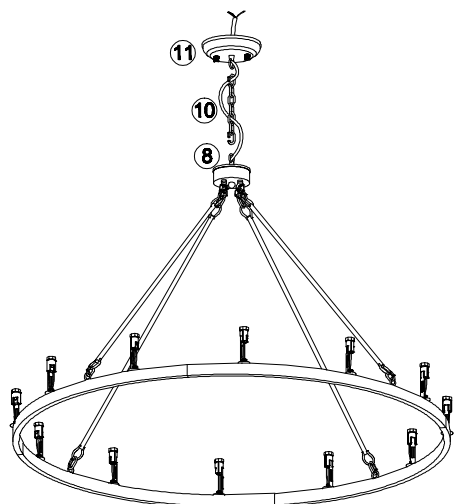

5. Connect the canopy (11) and the light fixture (8) with chain (10).

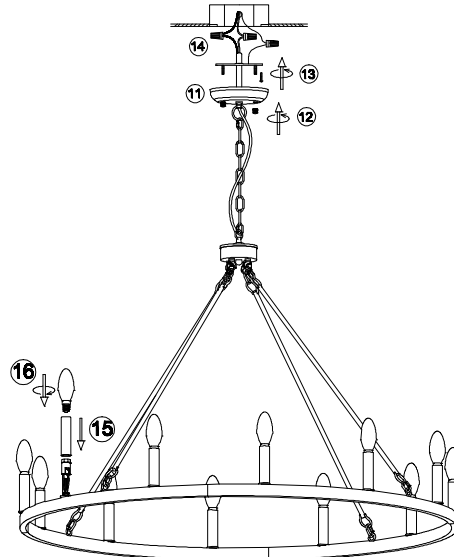

6. Install the bracket to the ceiling junction box with screw (14).
7. Connect the wire to your home line with cap connectors (14).
8. Install the fixture to the bracket with cap nuts (12).
9. Put the cylinder tube (15) on top of bulbholder and install the bulb (16).

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !