

WIRE CONNECTION DIAGRAM

Wires met safety standards are recommended to connect the supply circuit.

CAUTION: Risk of fire



INSTALLATION INSTRUCTIONS



Please read all instructions carefully, Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a letter. Please proceed in an alphabetical order.

- | | |
|----------------------------|-------------------------|
| A. Existing Electrical Box | B. Crossbar |
| C. Crossbar Screws | D. Canopy Loop |
| E. Canopy | F. Canopy Loop Nut lock |
| G. Chain | H. Ground Wire |
| I. Loop | J. Wire |
| K. Junction Caps | |


Attach the crossbar (B) to the existing electrical box (A) using the two crossbar screws (C) which are not supplied and should already be in your box.

Slide the canopy loop nut lock (F) back up over the canopy loop (D), pass the canopy loop (D) through canopy (E), connect with the threaded pipe underside of the crossbar.

Pass the main wire (J) and ground wire (H) through the loop (I), the chain (G), the canopy loop nut lock (F), the canopy (E), the canopy loop (D) and the crossbar (B) until the end of the main wire (J) reaches the electrical box (A) where you can make the appropriate connections. When connecting the wire use electrician approved junction caps (K). Stow the excess wire in the electrical box(A). Raise the canopy (E) and canopy loop nut lock (F), attach canopy (E) to ceiling, slide canopy loop nut lock (F) over canopy loop (D) and hold the canopy (E).

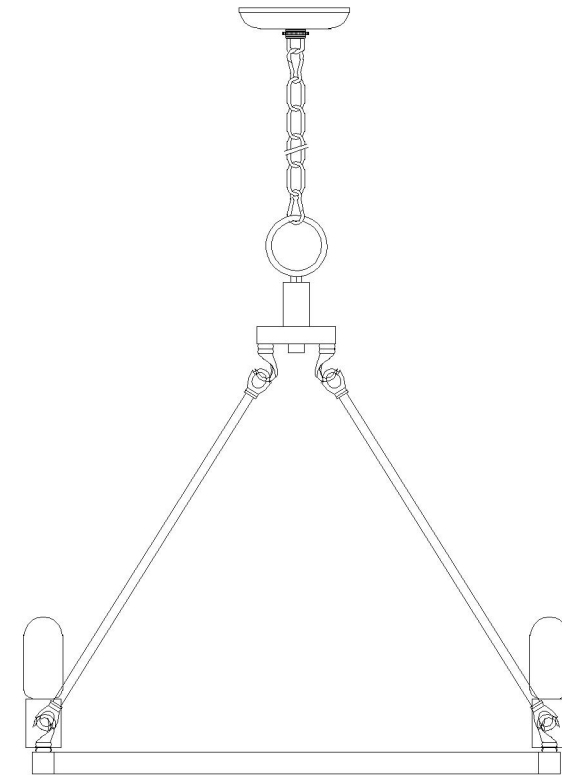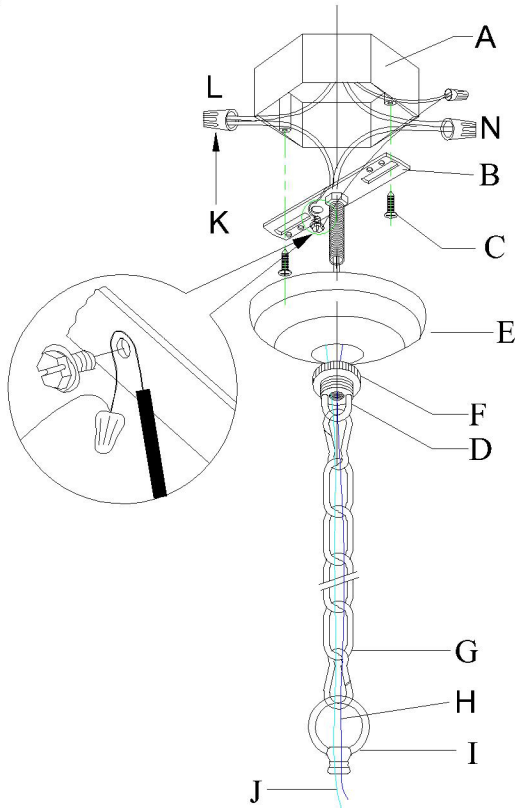

Light Bulb (Not included)



Buckle is used to connect the chain and loop or adjust the length of chain.

(Rated 110-130V/60Hz, bulb 40W-60W maximum.)

Assembly and Installation Steps

Step 2

Unscrew the collar loop.

Step 3

Once the black wire is pulled out, pass it through the hook and round metal part in sequence.

Step 1

The black wire needs to pass through the rod.

Step 6



Attach the loop to the hook.

Step 4

4A. Attach the 3 wires with writings together. Tighten the wires using the wiring cap. Cover the wiring caps using the insulated rubber tape.
4B. Attach the 3 wires with no writing together. Tighten the wires using the wiring cap. Cover the wiring caps using the insulated rubber tape.

Step 5

Connect the threaded long rod to the threaded iron part.

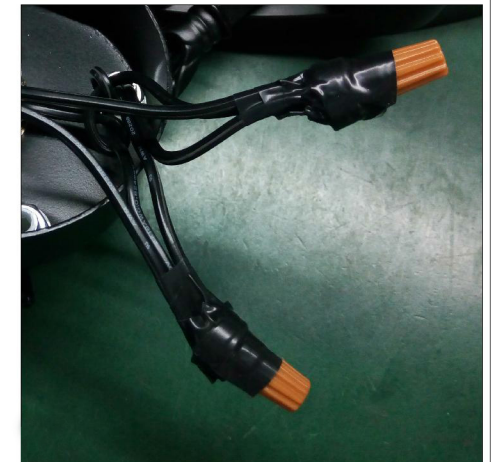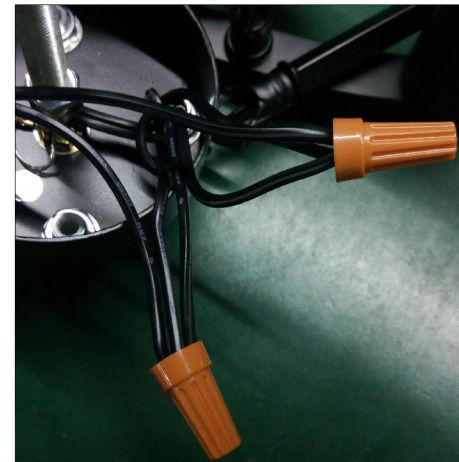


Assembly and Installation Steps

Step 7

7A. Lock the crossbar to the junction box of the ceiling by using 2 pcs of 5/32 screws in the accessories bag.

7B. Connect the wires. The hot/positive (+) wire is the one which has writing on it. The negative (-) wire is the one which has no writing.

7C. Cover the ceiling canopy and attach the screws to the canopy.

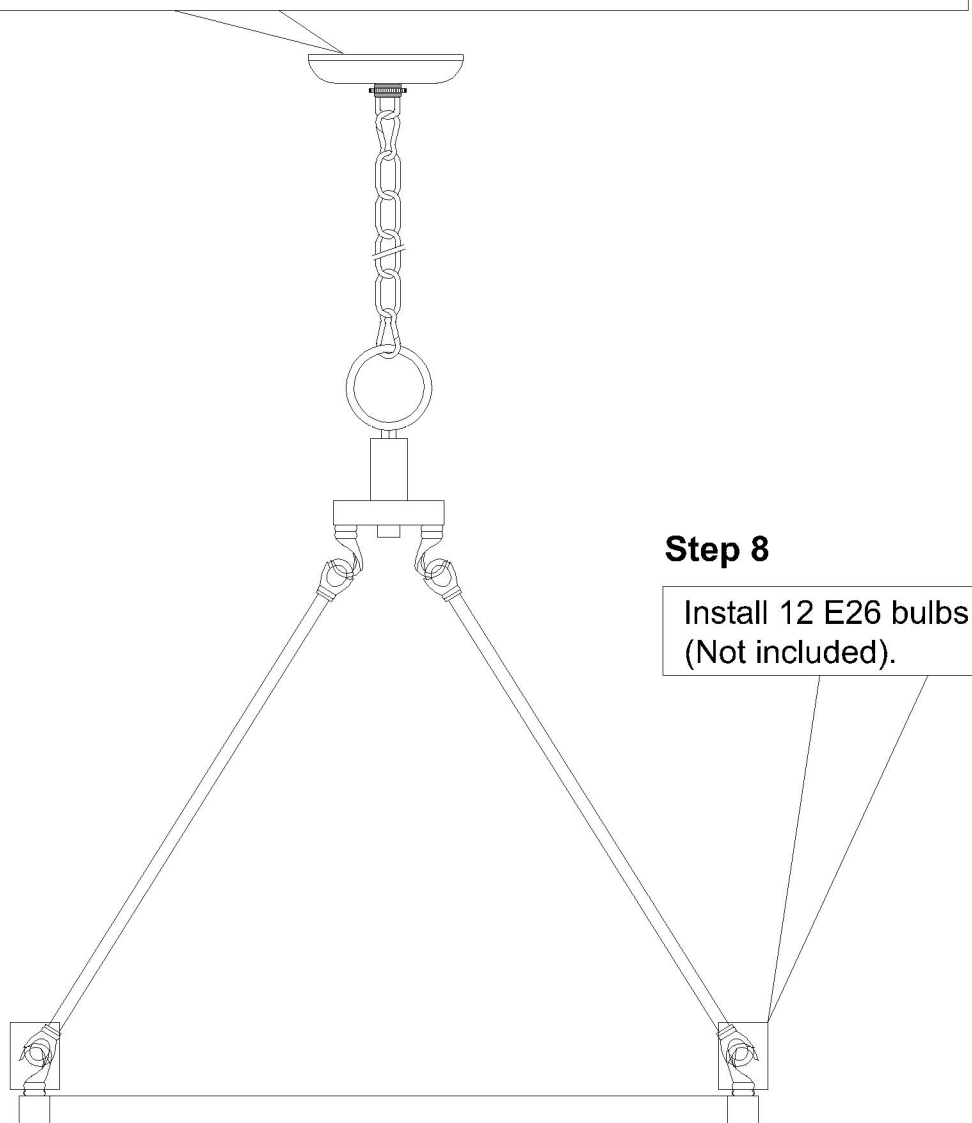

Step 8

Install 12 E26 bulbs
(Not included).

Please note: The parts in this table are completely unassembled, for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.

