



Office Chair Assembly Manual

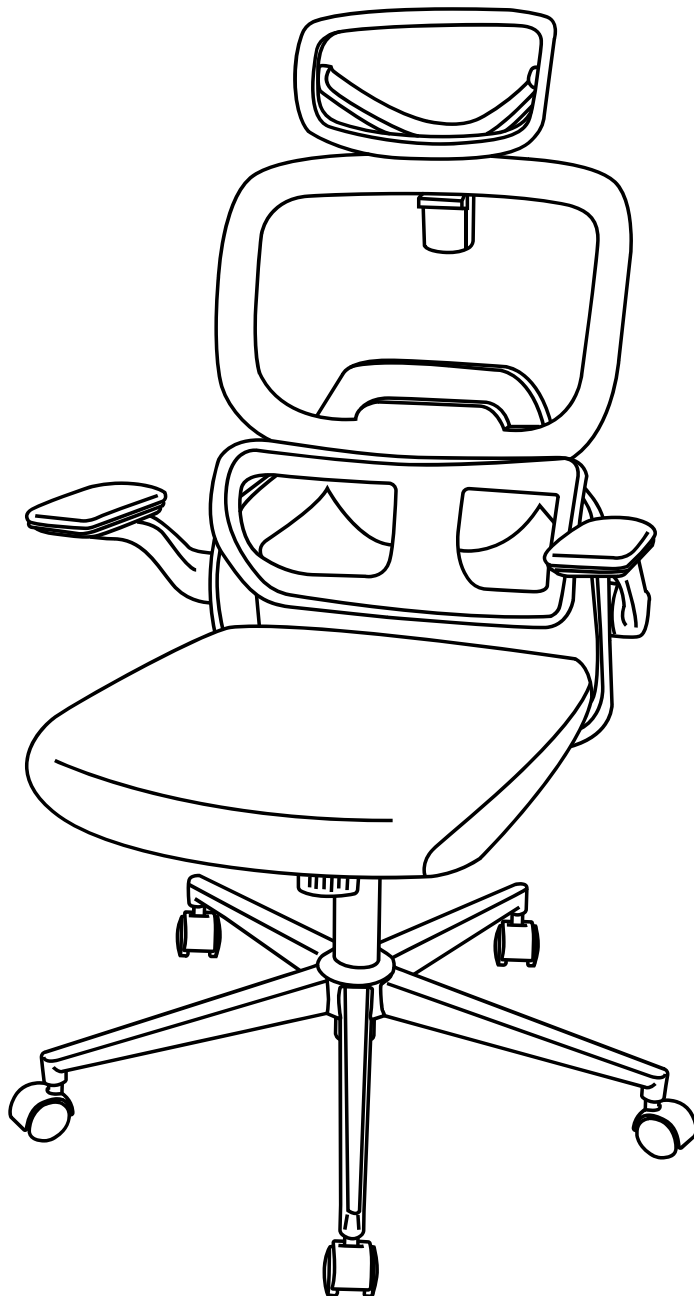


Instruction Manual

Contents


Make sure that the package contains the following parts:




① Upper Back(1)




② Lower Back (1)




③ Rear Cover Plate(1)




④ Seat Cushion(1)




⑤ Arms(2)




⑥ Headrest(1)




⑦ Seat Plate(1)




⑧ Gas Lift(1)




⑨ Star Base(1)




⑩ Casters(5)




Bolts M6 × 14mm(5)
Ⓐ




Bolts M6 × 25mm(6)
Ⓑ




Bolts M6 × 30mm(4)
Ⓒ




Bolts M6 × 50mm(4)
Ⓓ




Washers M6 × 15mm(4)
Ⓔ



Washers M6 × 18mm(8)
Ⓕ




Wrench(1)
Ⓖ

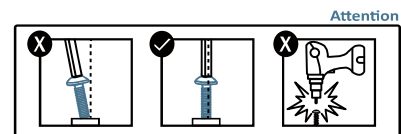


Attach The Bottom

STEP 3

Insert the Gas Lift (8) into the center hole of the star base.

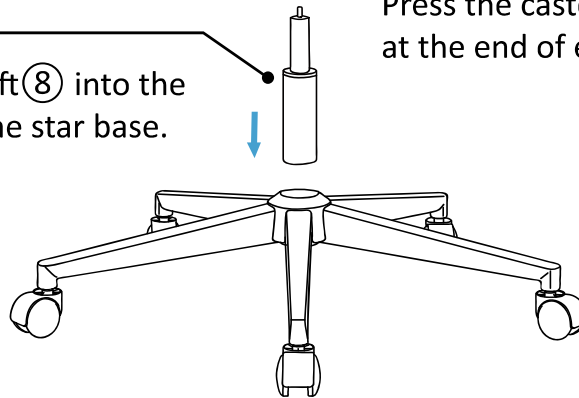

Turn the star base (9) upside down, Secure detachable feet with bolts(A) as shown.



STEP 1


STEP 2

Press the casters (10) into the holes at the end of each base leg.

Attach the Back Cushion & Seat Plate

B / F

D / F

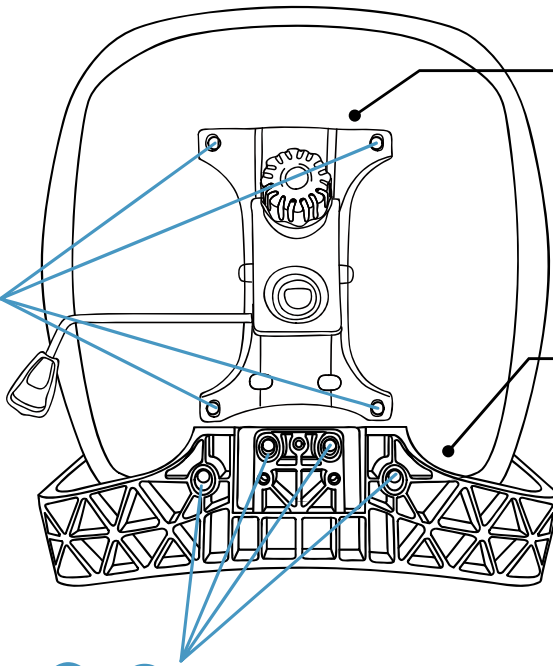


STEP 2

Attach the Seat Plate (7) to the Seat Cushion using Four Bolts(B) and Four Washers(F).


STEP 1

Attach the Lower Back (2) to the Seat Cushion (4) using Four Bolts(D) and Four Washers(F).

Order of bolts for better durability.




Push the Seat Cushion Down onto the Lift

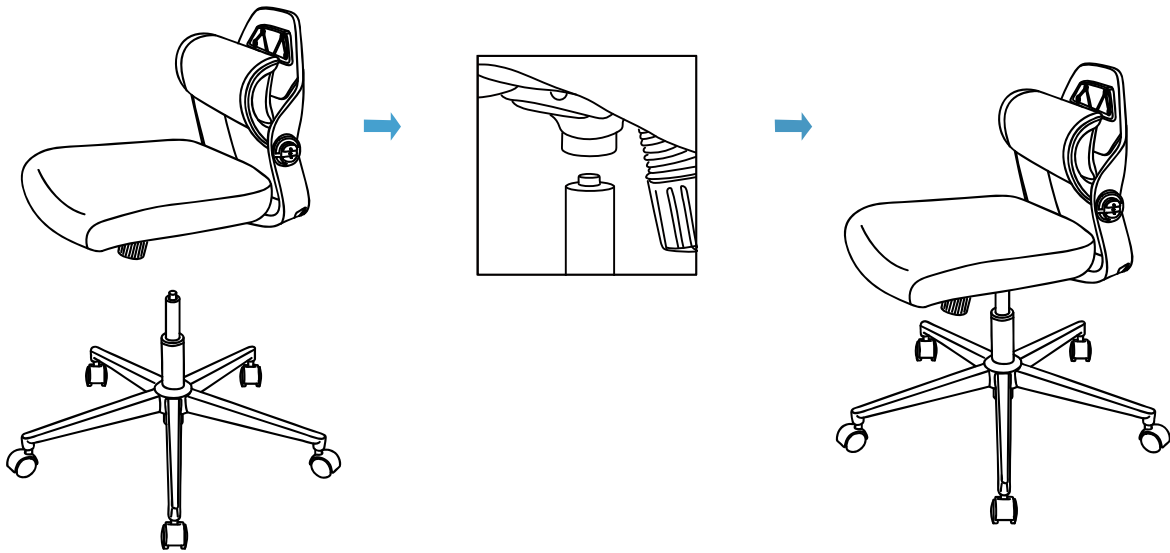

Attach the Backrest


STEP 1

As shown in the diagram, attach the headrest (6) to the Top Back (1).



STEP 2

As shown in the diagram, connect the Upper Back to the Lower Back with Four bolts (C) and Four Washers (E).

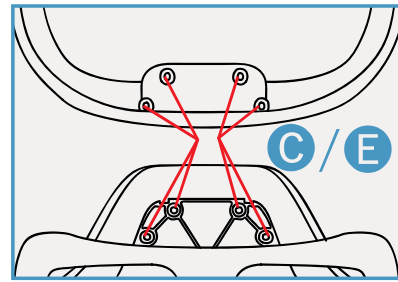



STEP 3

Align the Rear Cover Plate (3) with holes on backrest frame and snap into place.



STEP 4


Secure the arms (5) to the backrest, then install the components sequentially according to the order shown in the diagram.

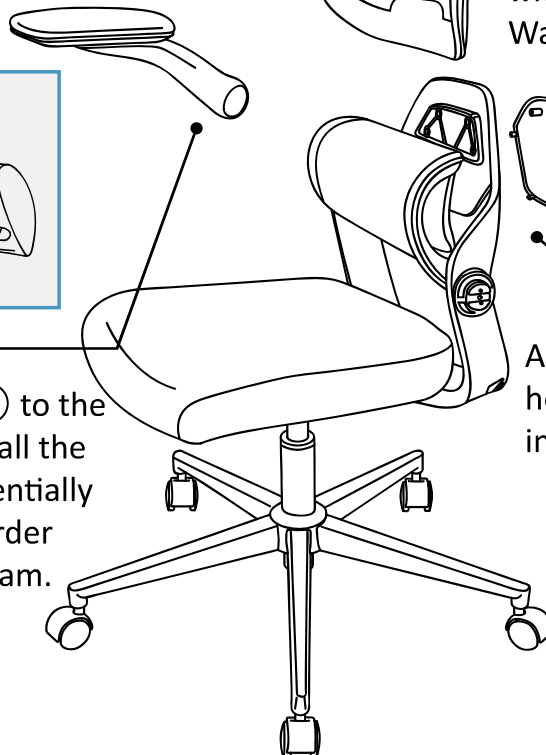

Make sure all bolts and screws are fully tightened before using chair.

Instruction Manual

1. Seat Height Adjustable

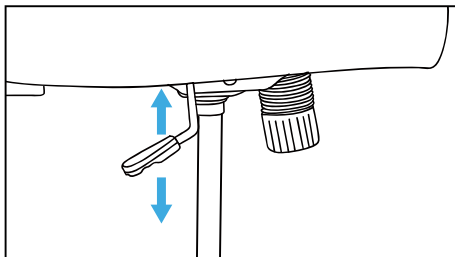

To raise:


While taking your weight off chair, lift lever up.



To lower:

While seated, lift lever up.

2. Rocking Pressure Adjustor

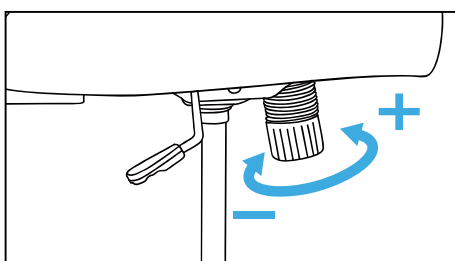

To increase tension:


Turn the tilt knob counter-clockwise.



To decrease tension:


Turn the tilt knob clock wise.

3. Rocking Function

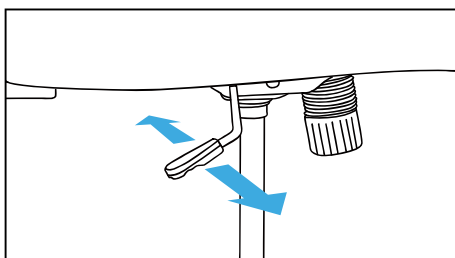

To let your chair rocking, pull the lever out.

4. Adjustable Armrests

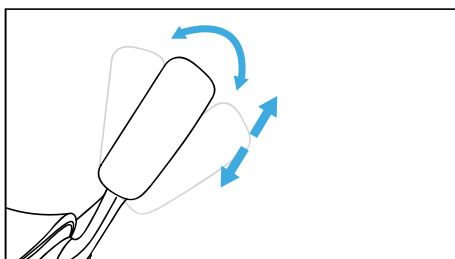

The position of the armrests can be adjusted according to your needs.

Child Safety: Keep children away during assembly; small parts pose choking hazards .

Emergency Contact: If installation issues arise (e.g., stuck gas lift), contact professionals. Do not use excessive force.