

WIRE CONNECTION DIAGRAM

Wires met safety standards are recommended to connect the supply circuit.

CAUTION: Risk of fire



CANOPY INSTALLATION INSTRUCTIONS


Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a letter. Please proceed in an alphabetical order.

- | | |
|----------------------------|-------------------------|
| A. Existing Electrical Box | B. Crossbar |
| C. Crossbar Screws | D. Canopy Loop |
| E. Canopy | F. Canopy Loop Nut lock |
| G. Chain | H. Ground Wire |
| I. Loop | J. Wire |
| K. Junction Caps | |


Attach the crossbar (B) to the existing electrical box (A) using the two crossbar screws (C) which are not supplied and should already be in your box.

Slide the canopy loop nut lock (F) back up over the canopy loop (D), pass the canopy loop (D) through canopy (E), connect with the threaded pipe underside of the crossbar.


Pass the main wire (J) and ground wire (H) through the loop (I), the chain (G), the canopy loop nut lock (F), the canopy (E), the canopy loop (D) and the crossbar (B) until the end of the main wire (J) reaches the electrical box (A) where you can make the appropriate connections. When connecting the wire use electrician approved junction caps (K). Stow the excess wire in the electrical box (A). Raise the canopy (E) and canopy loop nut lock (F), attach canopy (E) to ceiling, slide canopy loop nut lock (F) over canopy loop (D) and hold the canopy (E).

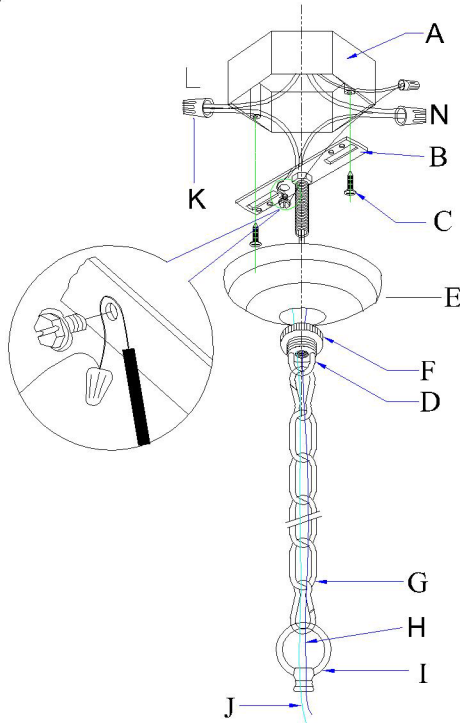


Light Bulb (Not included)



G9



Buckle is used to connect the chain and loop or adjust the length of chain.

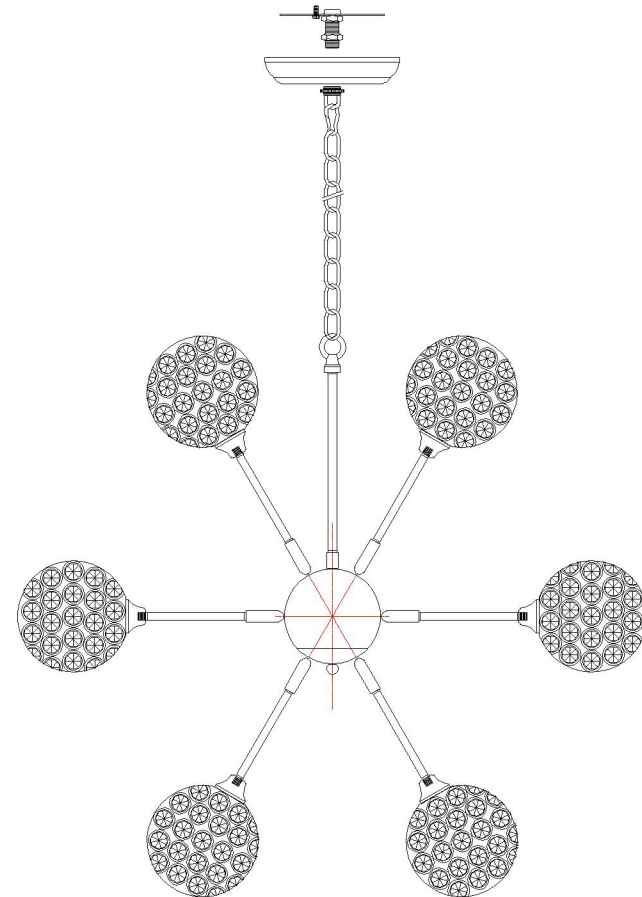


(Rated 110-130V/60Hz, bulb 35W-60W maximum.)

Assembly and Installation Steps


Step 1

Adjust the lamp arm to a proper position.

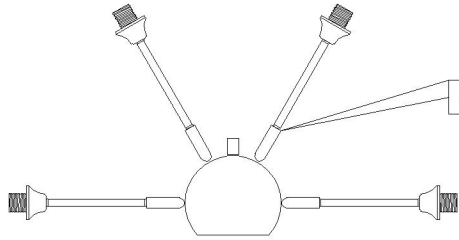


Step 2

Connect all white wires (-) from the arm together, and connect all black wires (+) from the arm together. Do not mix the black and white wires. There are two same main wires, they are thicker than the black and white wires. Connect black wires of the arms together with one of the main wire. Connect white wires of the arms together with the other main wire. The wires connection is finished.

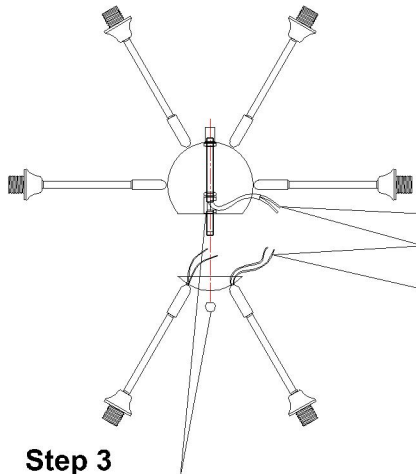


Step 3

Locked together.




Step 4

Install 12 G9 bulbs
(Not included).



Step 5

Locked together.



Step 7

1. Lock the crossbar to the junction box of the ceiling by using 2 pcs of 5/32 screws.
2. The hot/positive (+) wire is the one which has writing on it. The negative (-) wire is the one which has no writing.
3. Cover the ceiling canopy and attach the screws to the canopy.

Step 6

Locked together.

