

## SPECIFICATION SHEET

### BPL-103

• Directional Light

• Aluminum

#### Fixture Specifications:

**Housing:** Die-cast aluminum.

**Swivel:** Die-cast aluminum swivel, with ½ NPT hub on bottom.

**Finish:** Polyester UV powder coated, available in **BLK- Black, RST-Rust**

**Socket:** GU5.3 socket


**Lamp:** 12V, MR16 halogen bulb 20W standard, 50W Max. LED lamps available in 3W/6W/9W, with 2700K-warm white color temperature.

**Wiring:** Fixture is prewired with a 3ft 18-2 direct burial cord. Wire nuts sold separately.

**Mounting Spike:** Black 8½" ABS spike with ½" NPT male hub on top

**Electrical Notes:** A 12V transformer is required.  
Voltage range for 12V halogen lamps are 11V-12.5V  
Voltage range for LED lamps are 8V-21V.  
Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

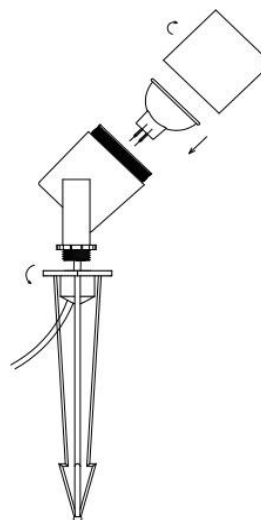

#### AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
3WMR16LED	3	45°	270	2700K	50000	20 Watt
6WMR16LED	6	45°	540	2700K	50000	35 Watt
9WMR16LED	9	45°	810	2700K	50000	50 Watt

#### AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
MR16 20W	20	36°		2700K	2000
MR16 35W	35	36°		2700K	2000
MR16 50W	50	36°		2700K	2000

