


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



Care and Cleaning

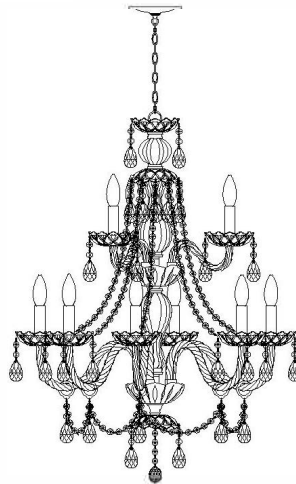






























To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	J	Crystal string (Long)		6X	S	Glass bowl (small hole)		1X
A1	Mounting screw		2X	K1	Flat washer		2X	T	Metal finial		1X
B1	Canopy		1X	K2	Internal teeth washer		9X	U	Dropper		1X
B2	Support wire cap		1X	L	Acrylic ring		6X	V	Bulb		9X
C	Lock		1X	M	Elastic washer		2X	W1	Metal round plate (3 hole)		1X
D	Out ring		1X	N	Spring washer		9X	W2	Metal round plate (6 hole)		1X
E	Chain		1X	O	Dropper		56X	X	Glass arm (big)		6X
F	Wire nut		6X	P	Crystal string (short)		6X	Y	Hex screw		12X
G	Glass bowl (Big hole)		9X	Q	Glass bowl		1X	Z	Top lamp body		1X
H	Socket cover		9X	R	Trumpet cap		1X	Z1	Bottom lamp body		1X
I	Glass arm (Short)		3X								

Installation

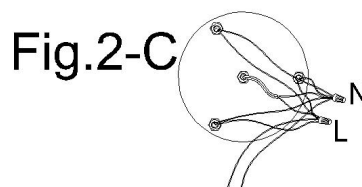
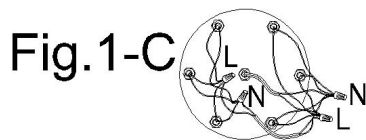
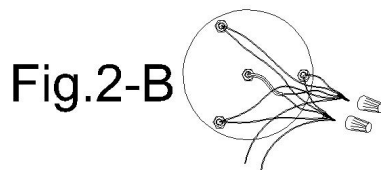
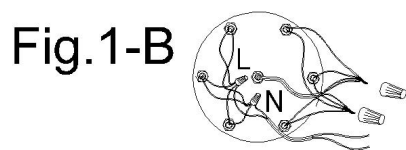
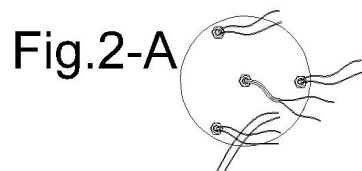
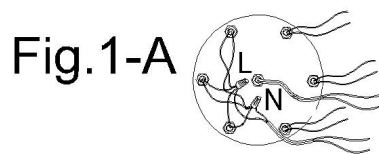


Fig.3 Long glass arm






Fig.4 Short glass arm

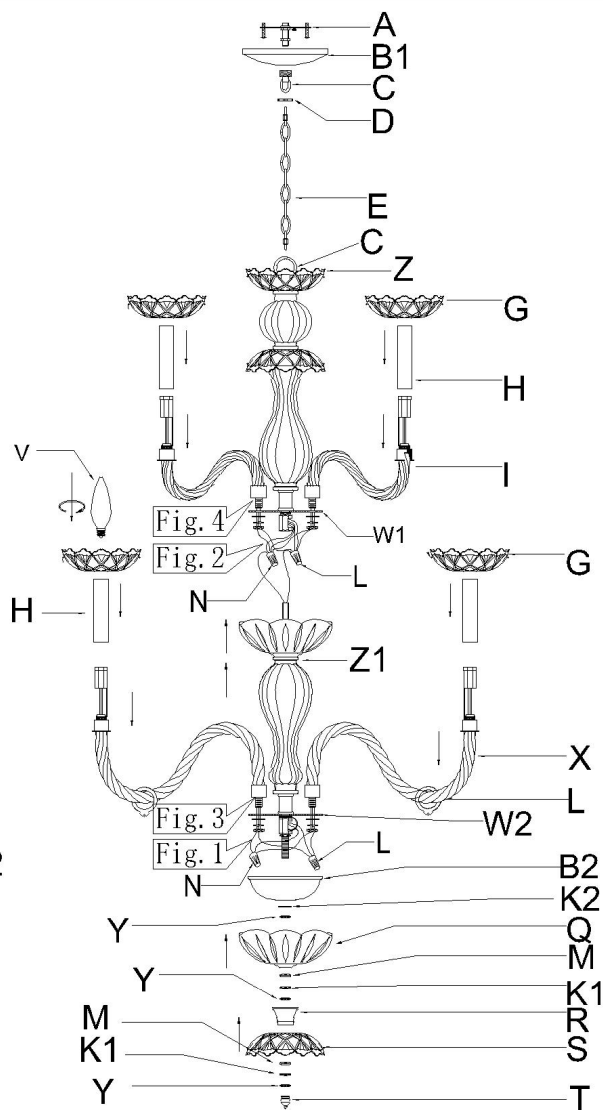

Step 1

Unpack all parts from cartons carefully

Place the glass arm(I) to the metal round plate(W1),then tighten with internal teeth washer(K2) , spring washer(N) and hex screw(Y)

Place the glass arm(X) to the metal round plate(W2),then tighten with internal teeth washer(K2) , spring washer(N)and hex screw(Y).

Connect electrical wire by wire nut(F) , identify positive and neutral(See step2)

Secure the support wire cap(B2),internal teeche washer(K2),hex screw(Y), glass bawl(Q),plastic washer(M),flat washer(K1), hex screw(Y),trumpet cap(R), Glass bowl (S), plastic washer(M),flat washer(K1)and hex screw(Y) to the tube of bottome lampbody(Z1) and tighten with metal finial(T)


Wire the top body(Z) to the bottom body(Z1),connect electrical wire by wire nut(F) , identify positive and neutral(See step2)

Place the acrylic ring(L),the socket cover(H) to the socketn then glass bowl(G)


Place the bulb(V) to the socket

Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor



*Note: When parallel wire(SPT I & SPT II) is used.The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left.)



Step 3

Hang list:


Hang dropper(O) on the hole of acrylic ring(L),the glass bowl(G) of the lampholder, the top glass bowl and the bottom glass bowl(S)

Hang dropper(O) on the acrylic ring(L)

Hang crystal string(L) on the hole(a)(b)

Hang crystal string(P) on the hole(c) of acrylic ring(L)

Hang dropper(U) on the metal finial(T)

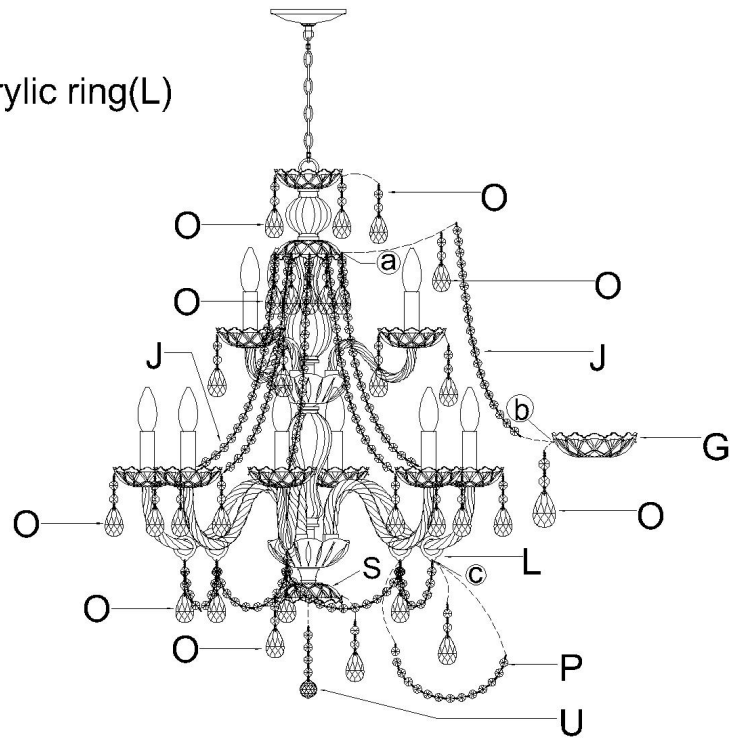


Step 4

Installing the mounting bar(A) with screws, and secure canopy(B) with the lock (C) and tighten with out ring(D)


Step 5

Installing whole body to the top lock(C)

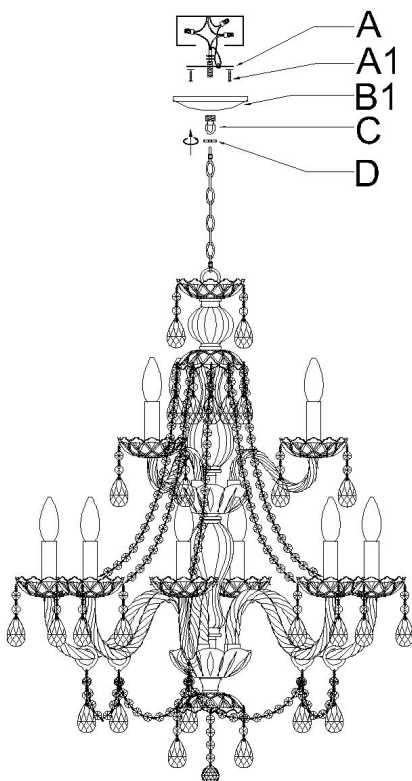

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

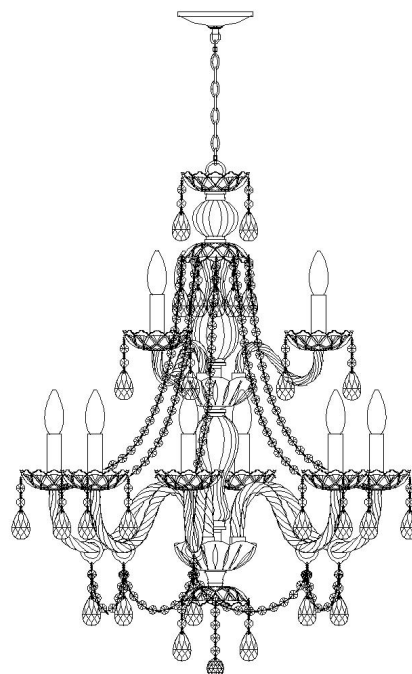

ENJOY YOUR LAMP