

Instructions


(* Please turn off the breaker before starting the installation.)
NOTE :1. Please Check whether the accessories are missing in time after unpacking.
2. We offer 12 months guarantee. If you find any damaged or missing parts in transit, please feel free to contact us by email, we will solve it ASAP！"















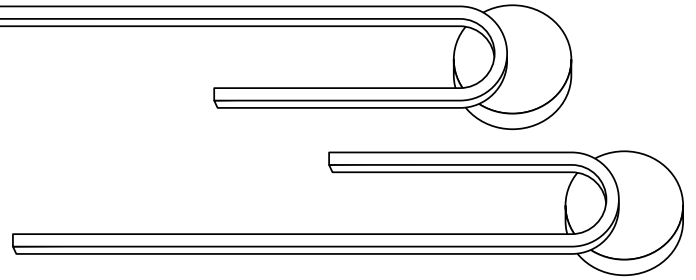



01

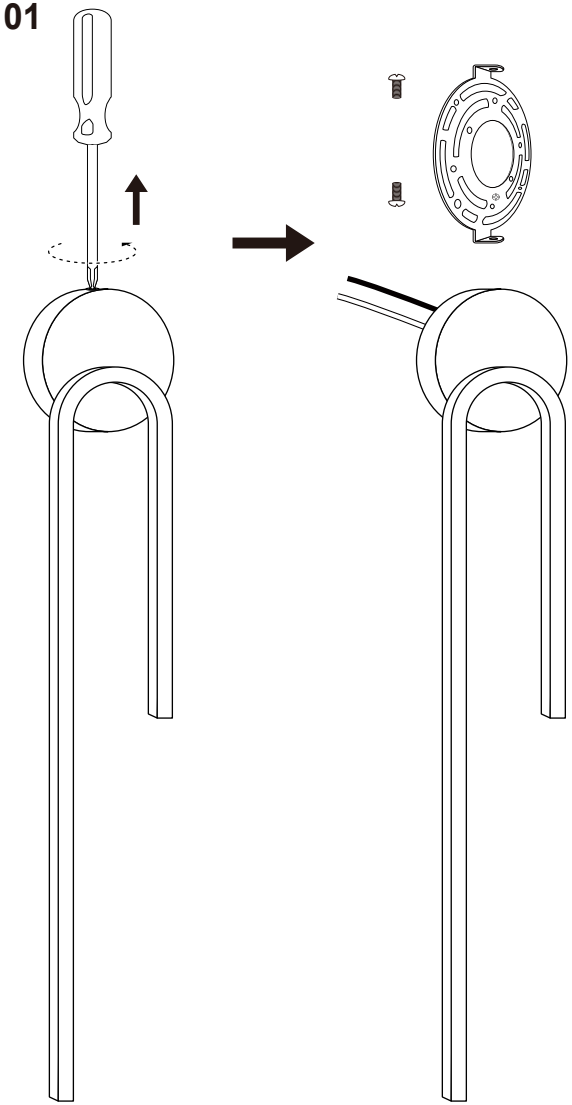

02

Screw the Mounting Bracket to the wall or junction box .
(There are many gaps, you can screw it to the wall.)

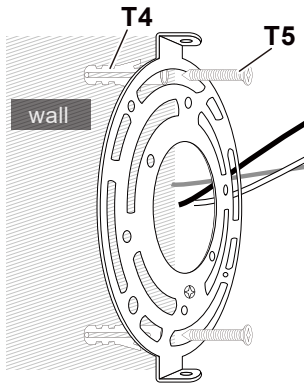


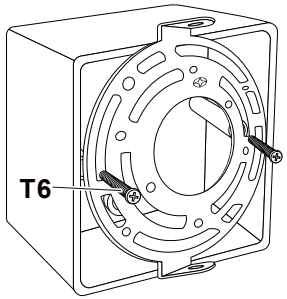


If you install the Mounting Bracket into the electrical box, please use T6 to fix it instead of T5.


03

Fixture wires should be connected to wall wires by color, black wire to be attached to the black wire, white to white and ground wire to ground wire.

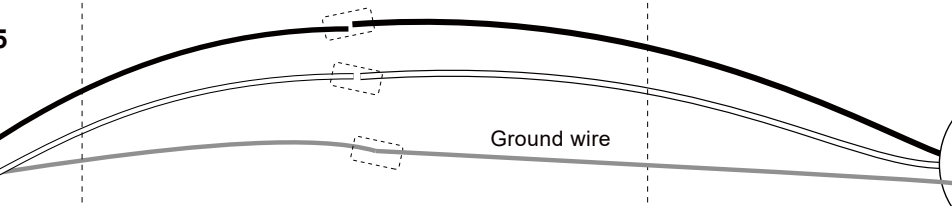


For your safety, you should use wire connector T1, T2 or T3 as you like. If you choose connector T1 you need to use electric tape for it.





Tips: **1.**Hold the heat gun about 3~6 inches away from the tubing, and keep it moving back and forth.
2.Continue heating the tubing until it is tightly secured to the wire.

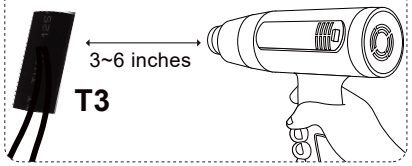

04

Fix the light to the wall

