

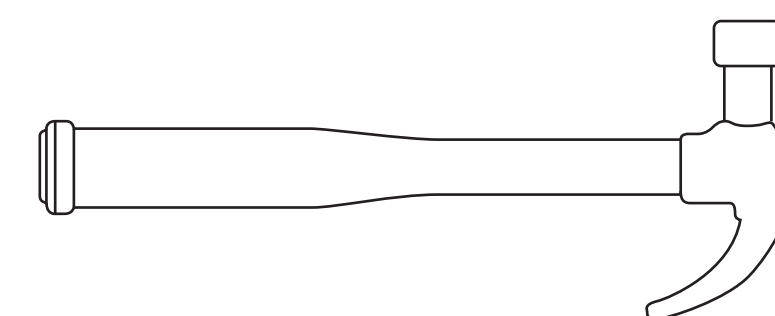

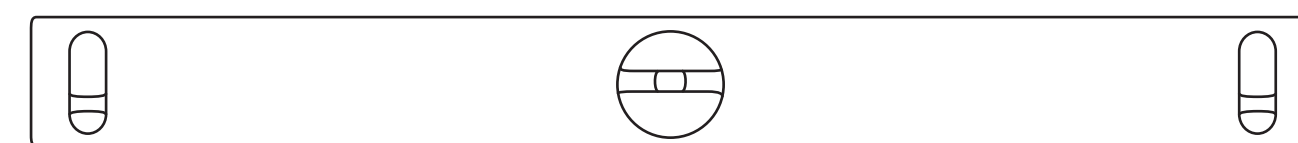



**Rack when in open position**

**SMARTSOME™**

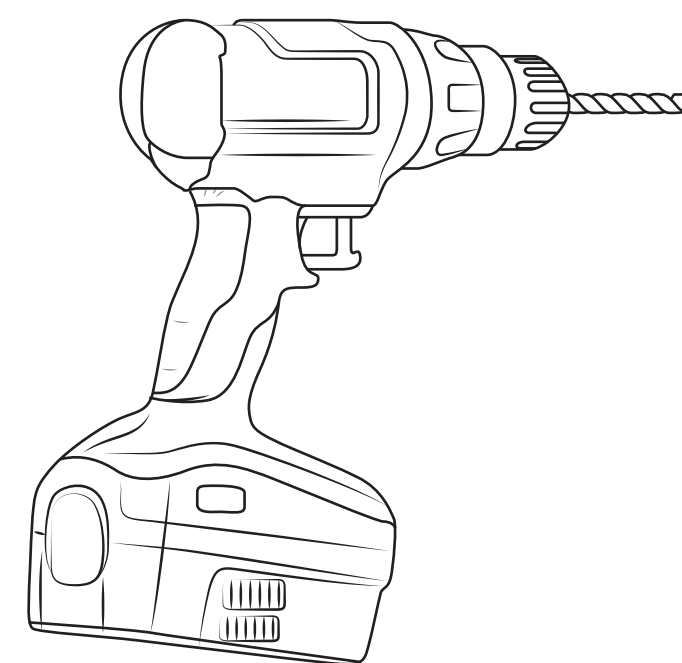


**Tools you will need**

### Step 1

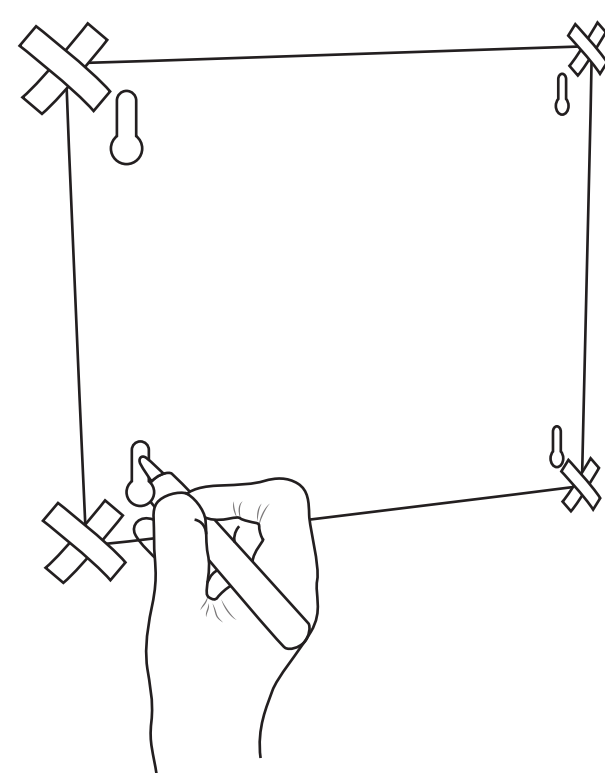

Place template on wall and use a pen or pencil to mark the drill hole position

### Step 2

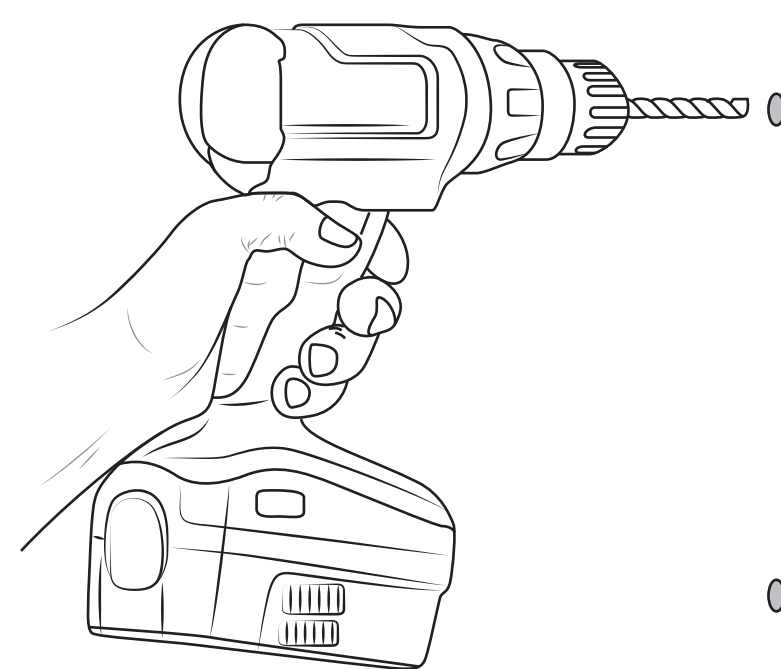

Use the drill to make a 1/2" or a 5/8" hole

### Step 3

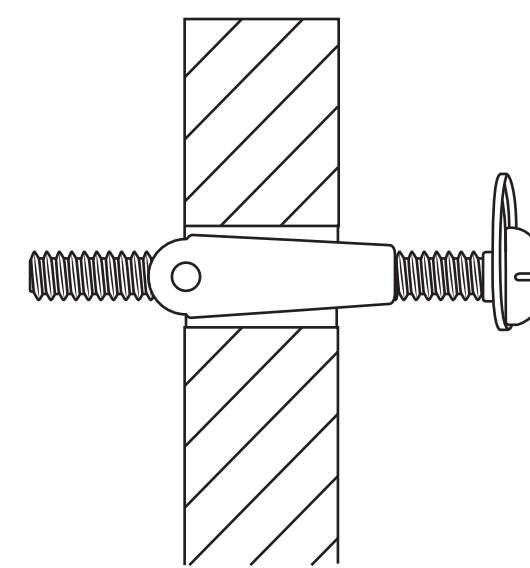


fig (1)

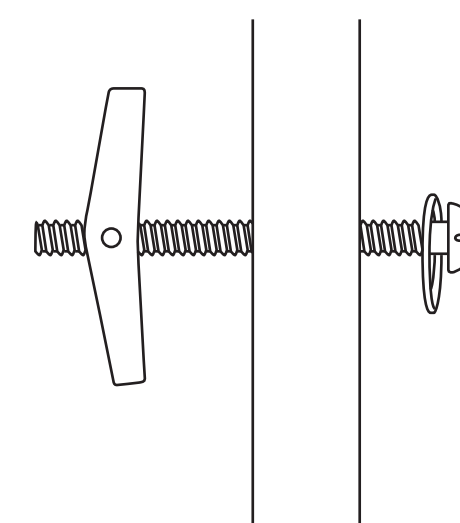


fig (2)

Insert Toggle bolt through hole , fig (1) and let the wing spring back behind the wall.(fig 2)  
Please make sure the washer has been set onto the screw at this point  
The washer will be used in preventing the screw to fall behind the wall

### Step 4

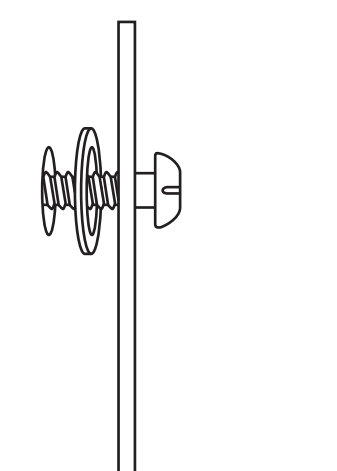


fig (3)

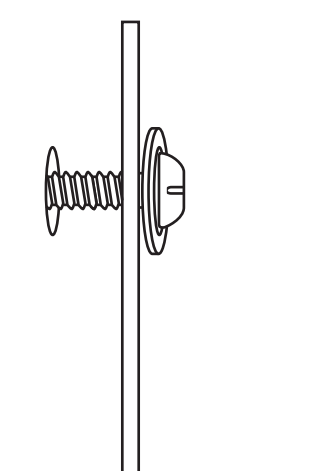


fig (4)

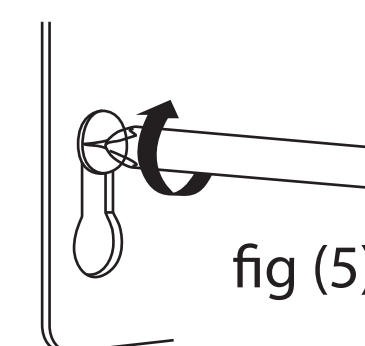


fig (5)

Please rack over all 4 screws , through the tear drop hole  
The washer must face the back side of the brackets as in fig (3) and not as in fig (4)  
Tighten the screws and secure rack to the wall. (fig 5)

**For any question or missing parts , please contact us at [Info@smgbrands.com](mailto:Info@smgbrands.com)**