

KITCHEN FAUCET


LK3B

INSTALLATION INSTRUCTIONS

KITCHEN FAUCET

LK3B

DIMENSIONS/TECHNICAL DATA

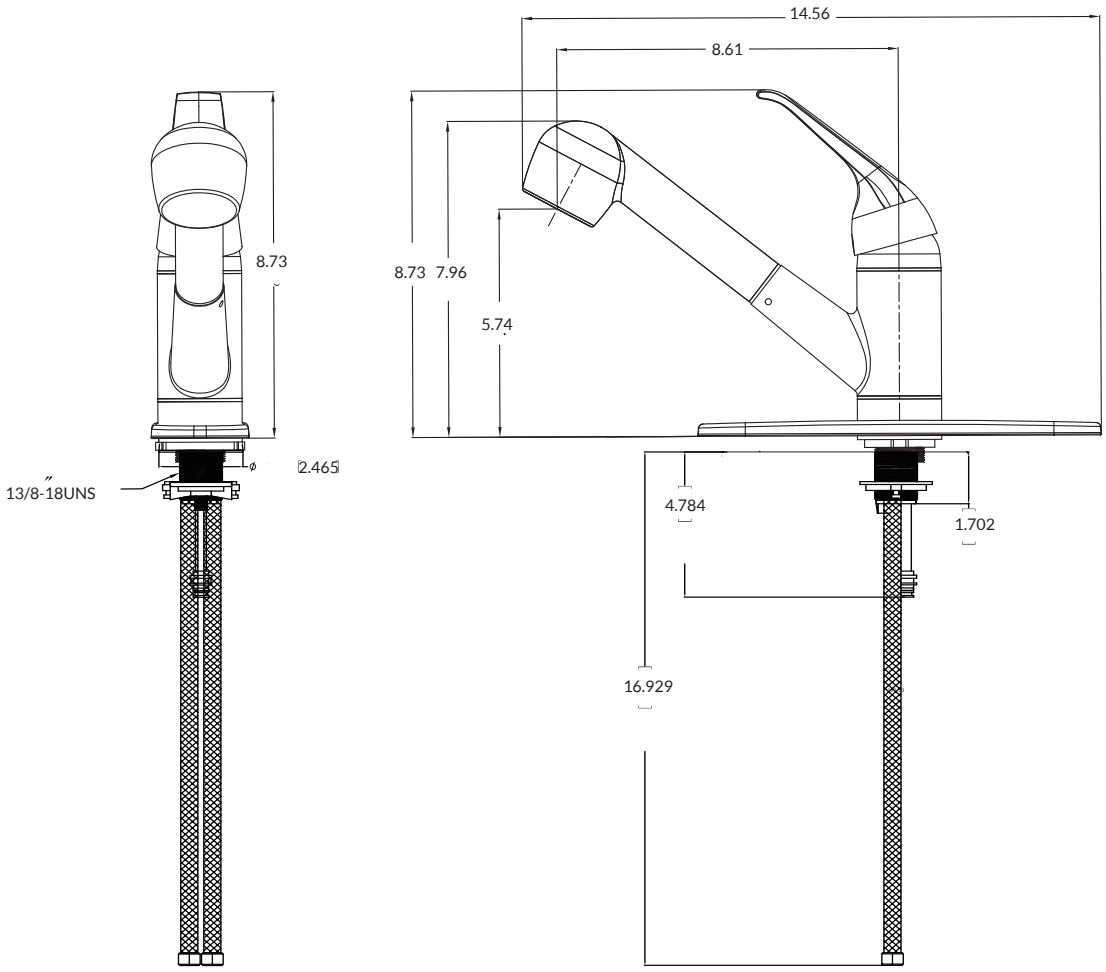


ATTENTION! Dimensions may vary by up to 3/8". It is highly recommended to pull all dimensions of actual model for installation and measuring purposes.

ATTENTION! The measurements in inches are rounded to the nearest 1/8"


TECHNICAL DATA

Max Flow Rate 2. 2 GPM at 60 PSI

PACKING LIST

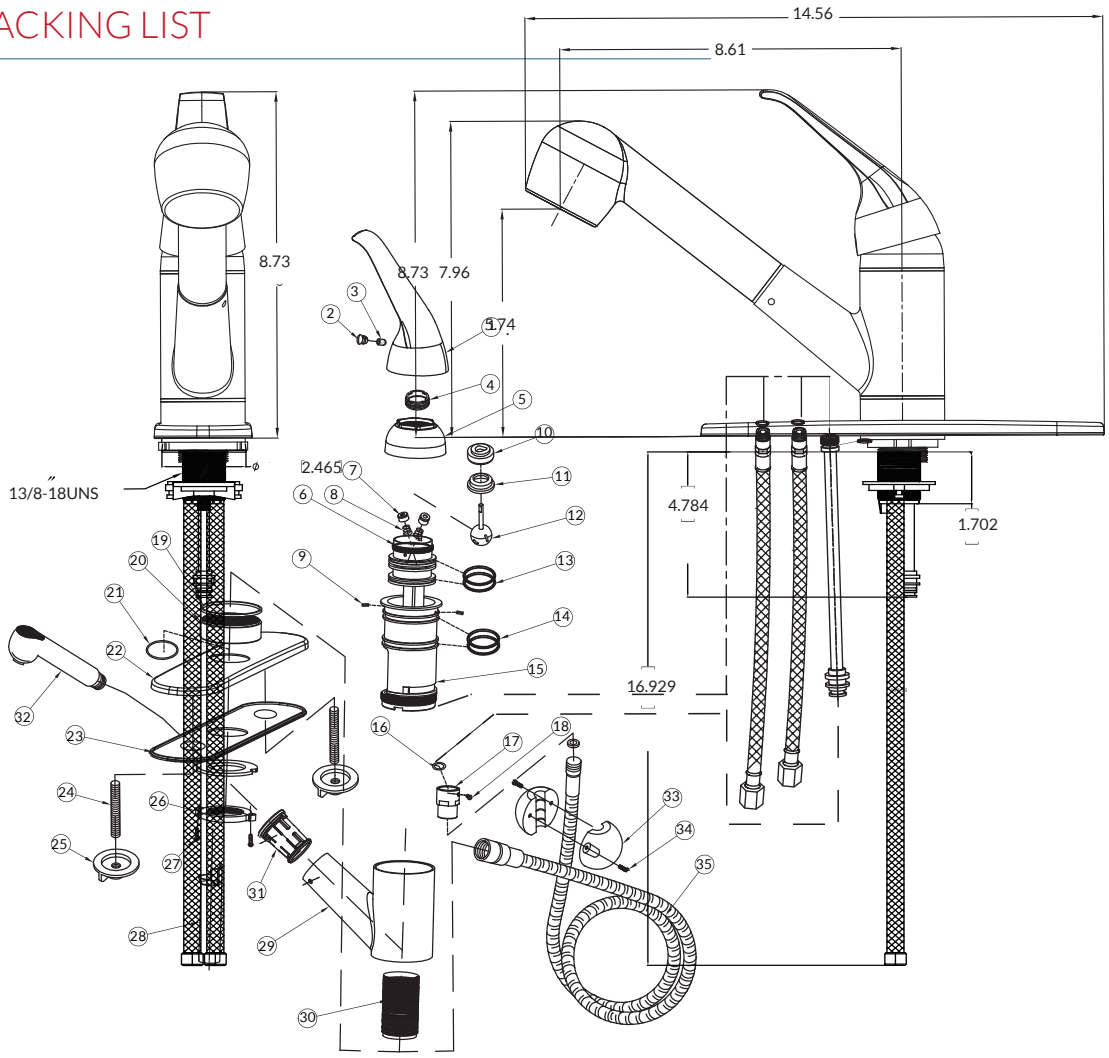

TOOLS REQUIRED FOR INSTALLATION (**NOT INCLUDED**)

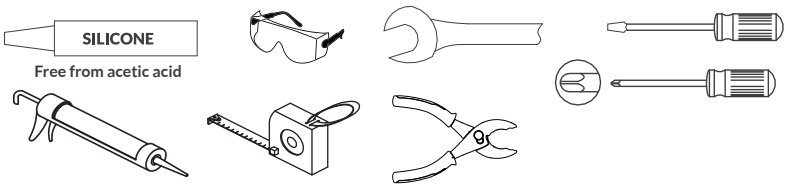


Note: Other tools may be required

KITCHEN FAUCET


LK3B

INSTALLATION INSTRUCTIONS


Maintenance Your new faucet is designed for trouble-free performance. Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.




Locate water supply inlet and shut off water supply valve.These are usually found under the sink or near the water heater. Remove old faucet. Clean and dry sink surface area where new faucet will be mounted.




Place base plate (2B) and escutcheon (2A) on the sink (figure A).



A. Insert supply tubes and shank through hole in sink (or through center hole of escutcheon if used).
B.Assemble washer (3A), and thread mounting nut (3B) onto shank on the underside of sink. Hand tighten nut and check that rotation of handle from hot to cold is centered. Firmly tighten the lock screws (3C) to washer (3A). Do not over-tighten.




A.Insert small end of the hose through spray holder (4A) and feed it through the main body of the faucet so the spout assembly rests inside the spray holder.
B. Ensure that rubber washer stays in place on the end of hose.
C.Connect hose to water outlet tube and tighten. Do not over-tighten. Make sure hose is free of any obstruction.
D.With spout assembly in spray holder, install weights (4B) onto spray hose using screw. Position weights two feet (2') from the underside of the sink.



Connect water supply lines.
(A) Use faucet supply lines or use coupling nuts (not supplied) with ball-nose risers (not included).

Turn water supply or shut-off valve back on and check for leaks. If leaks occur, gently tighten the faucet connections.



To prevent damage to the internal parts of your faucet from debris that may have collected in the water lines, it is necessary to flush the faucet. To flush , remove the sprayhead. Lift the faucet handle up to the full on position. Run water for one minute. Repeat in hot and cold positions. Reassemble the sprayhead to the pull-out hose by turning the metal hose fitting.

READ ALL INSTRUCTIONS BEFORE UNPACKING THE PRODUCT

INSTRUCTIONS THAT, IF IGNORED COULD RESULT IN DEATH OR SERIOUS INJURY CAUSED BY INCORRECT HANDLING OR INSTALLATION OF THE PRODUCT. THESE INSTRUCTIONS MUST BE OBSERVED FOR SAFE INSTALLATION.

INSTALLATION OF LESSCARE PRODUCTS BY AN INEXPERIENCED INSTALLER MAY RESULT PERSONAL INJURY OR DEATH!

LessCare reserves the right to change, update, modify, alter, redesign this manual/product or its policies without prior notice!
It is your responsibility to visit website to download or contact customer service for the most updated version of the installation instructions.

LessCare shall not be liable for any injuries or property damages in connection with this product during installation or use of this product!

LessCare products must be installed by a fully insured and licensed plumber only. Installation of any LessCare product by anyone other than fully insured and licensed plumber shall void limited warranty. LessCare recommends that such licensed plumber have experience in the installation of products.

Limited warranty is void on any commercial installation

LessCare is not responsible for local code compliance for this product. Building and plumbing codes may vary from state-to-state in accordance to your location. LessCare is not resonsible for providing any compliance certifications.

LessCare is not responsible to provide any type of certifications for this product

Under no circumstances LessCare shall not be liable for any and all incidental damages sustained in connection with this product

Neither manufacture, nor distributor, nor retailer is responsible for water damage or flood caused due to use of this product.

Under no circumstances LessCare shall not be liable for any and all fees, cost of installation/reinstallation/removal, subsequent damage or transportation in case of the product defect

Maintenance & Care

IMPORTANT!

DO NOT USE: Abrasive cleaners such as: acid, ammonia, bleach, and simmilar solutions. Use of such solutions may cause corrosion, finish peeling, and/or dull the surface.

DO NOT USE: Abrasive sponges or cloth. Never use steel, wool, or wired brushes that will permanently scratch the surface.

Retain these installation instructions for future reference!

Thank you for using LessCare products!