


ASSEMBLY AND INSTALLATION INSTRUCTIONS

CA2537-JES-2W

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE

- NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

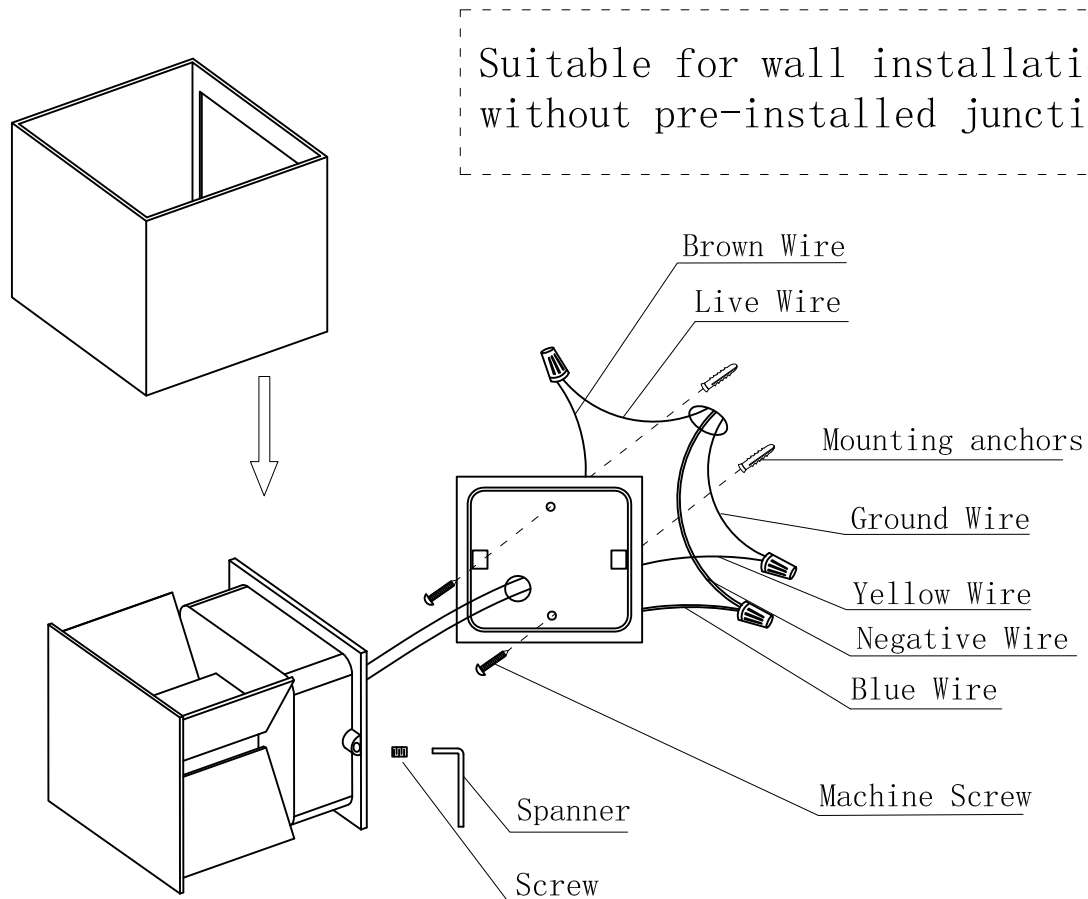

3. Pull out the wires and grounding wire from the outlet box. Make wire connections using the wire nuts, as follow:
—Connect the hot wire(usually Brown insulation)from the fixture to the black wire from the power source.
—Connect the neutral wire(usually Blue insulation)from the fixture to the white wire from the power source.
—Attach the fixture grounding wire(usually Yellow insulation or bare wire)to the mounting strap with the green grounding screw.Then connect it to the house grounding wire with the wire nut.
Carefully put the wires back into the outlet box.

CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.

Turn on the power at fuse or circuit box.