

# MAHJONG TABLE INSTALLATION



Open the packaging for the table frame and legs, and take out all the included accessories and connecting screws.



First, remove the 4 connecting screws from the grid frame and the table frame.




Note: The screws removed here will be used later to adjust the height of the mechanism.



Take out the grid frame, and use screws to connect the legs to the table frame.



Remember to add washers to the screws here.

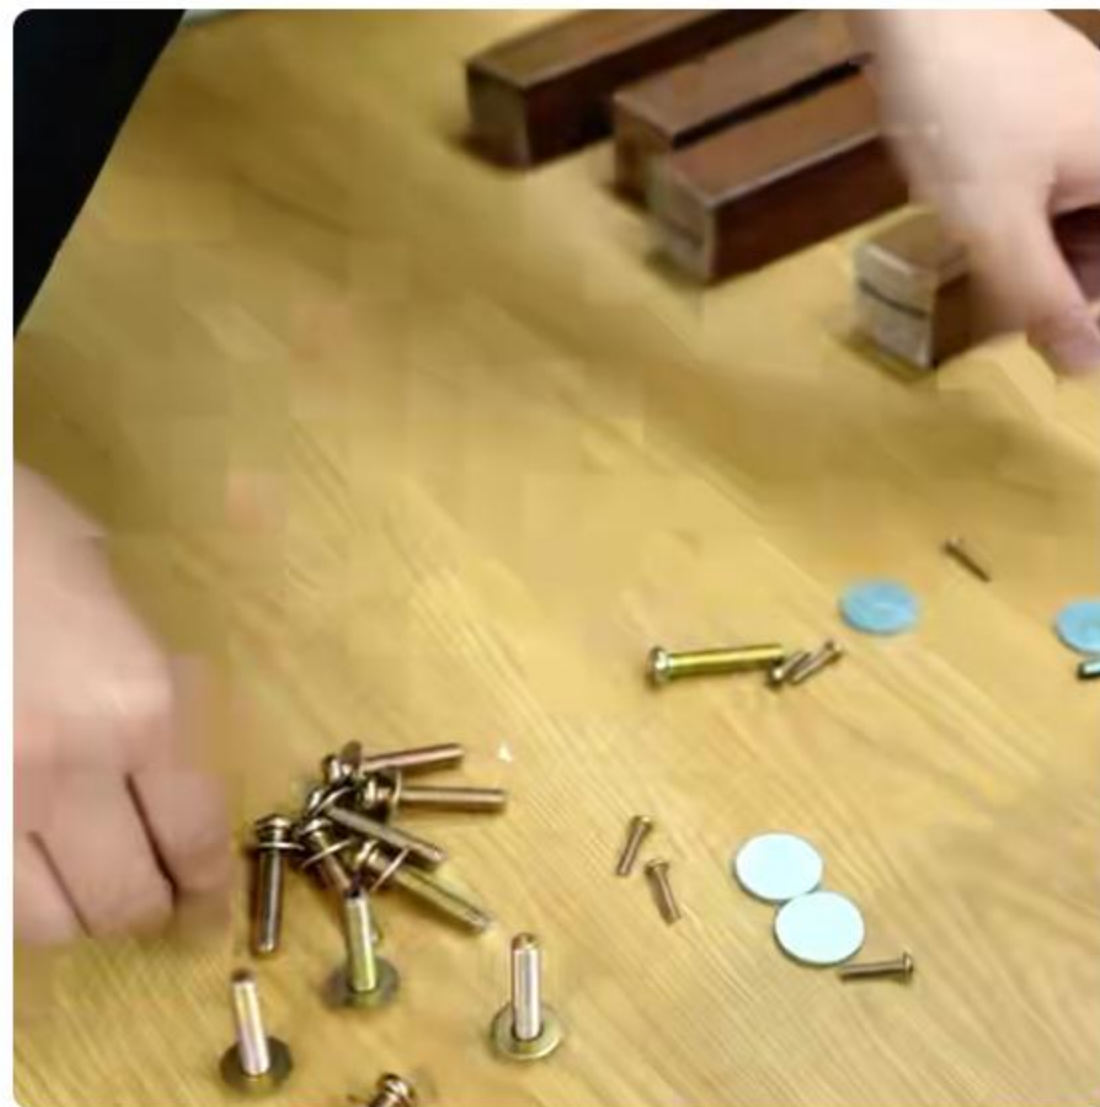


First, use screws to connect the legs to the table frame one by one, but only insert one screw per leg for now.



After all four legs are installed, flip the table over.



If you find that the legs and the table frame are not flush, be sure to adjust them so they are level.

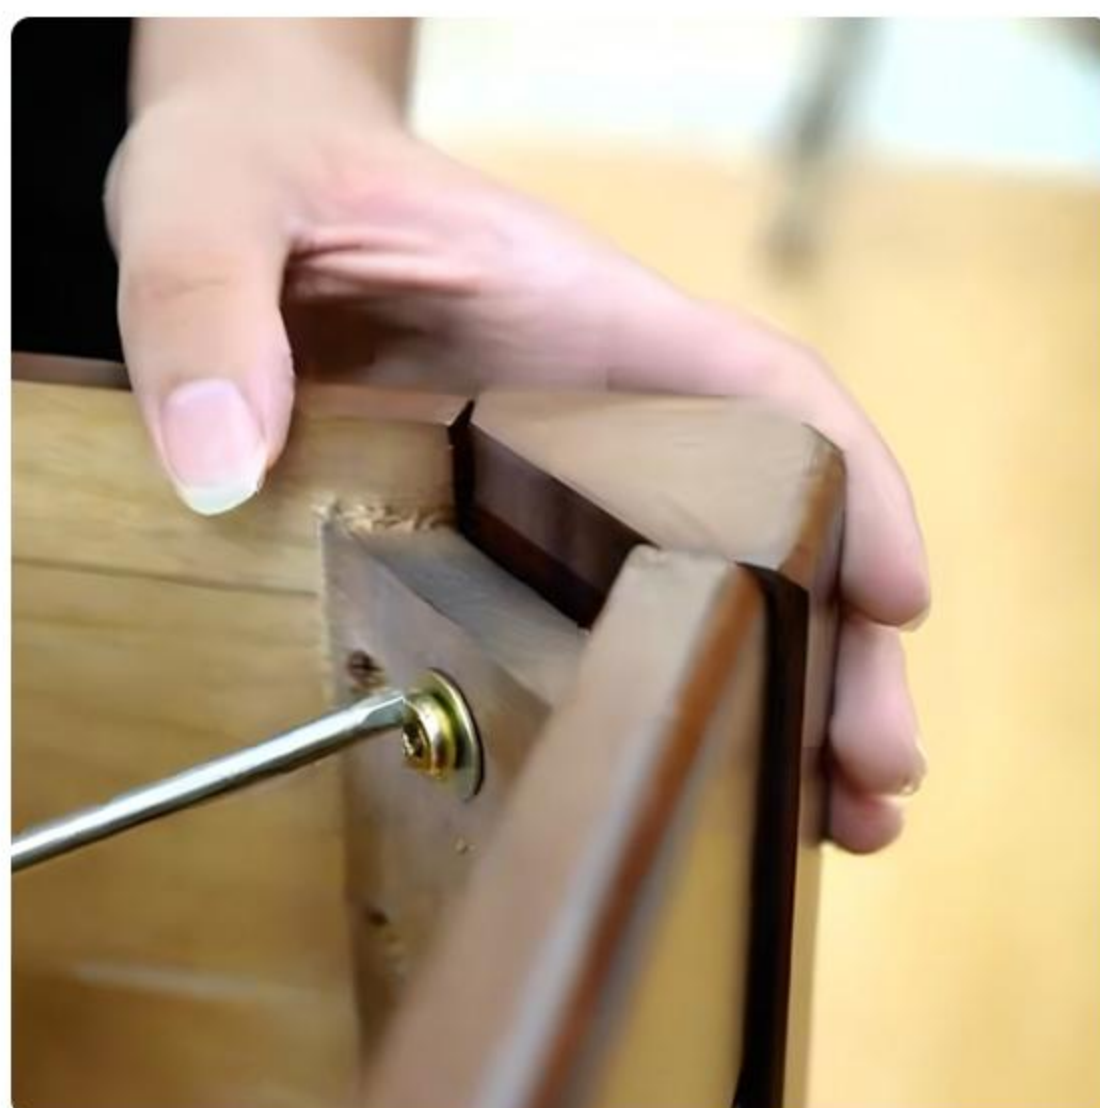

After making adjustments, install the grid frame.




The installation height of the grid frame should be slightly greater than the thickness of the mechanism.



Find the metal handles from the accessories—each handle comes with two screws.



Place the mahjong table mechanism inside and cover it with the panel.

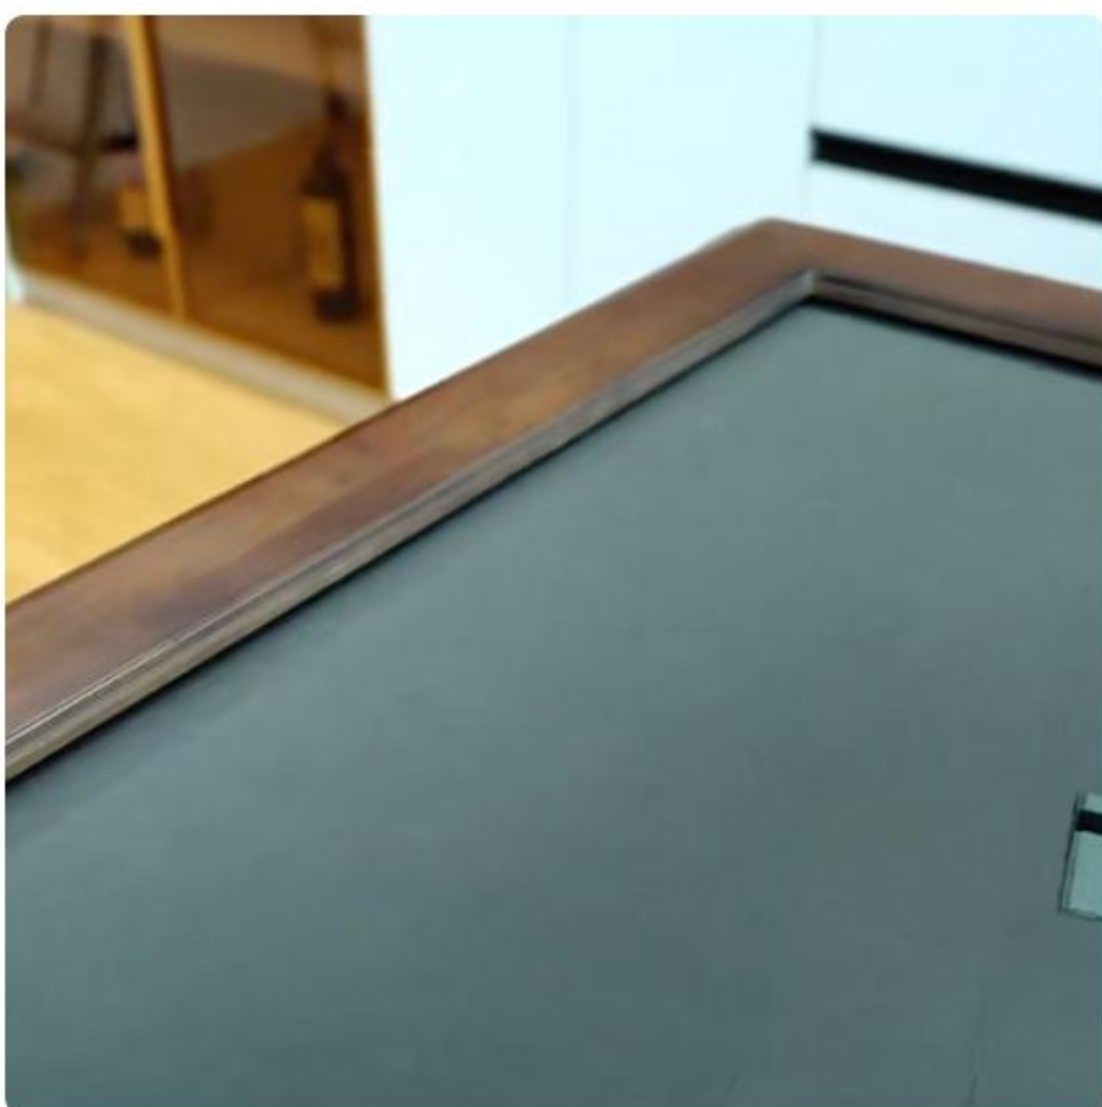


The mechanism shown in the diagram is a four-port silent mechanism. Please select the specific mounting holes based on the actual thickness of your mechanism.



Open the drawer from the inside and insert the screws.




Check if there is any gap between the mechanism and the panel. Adjust the screws on the bottom of the grid frame to adjust the height of the mechanism.

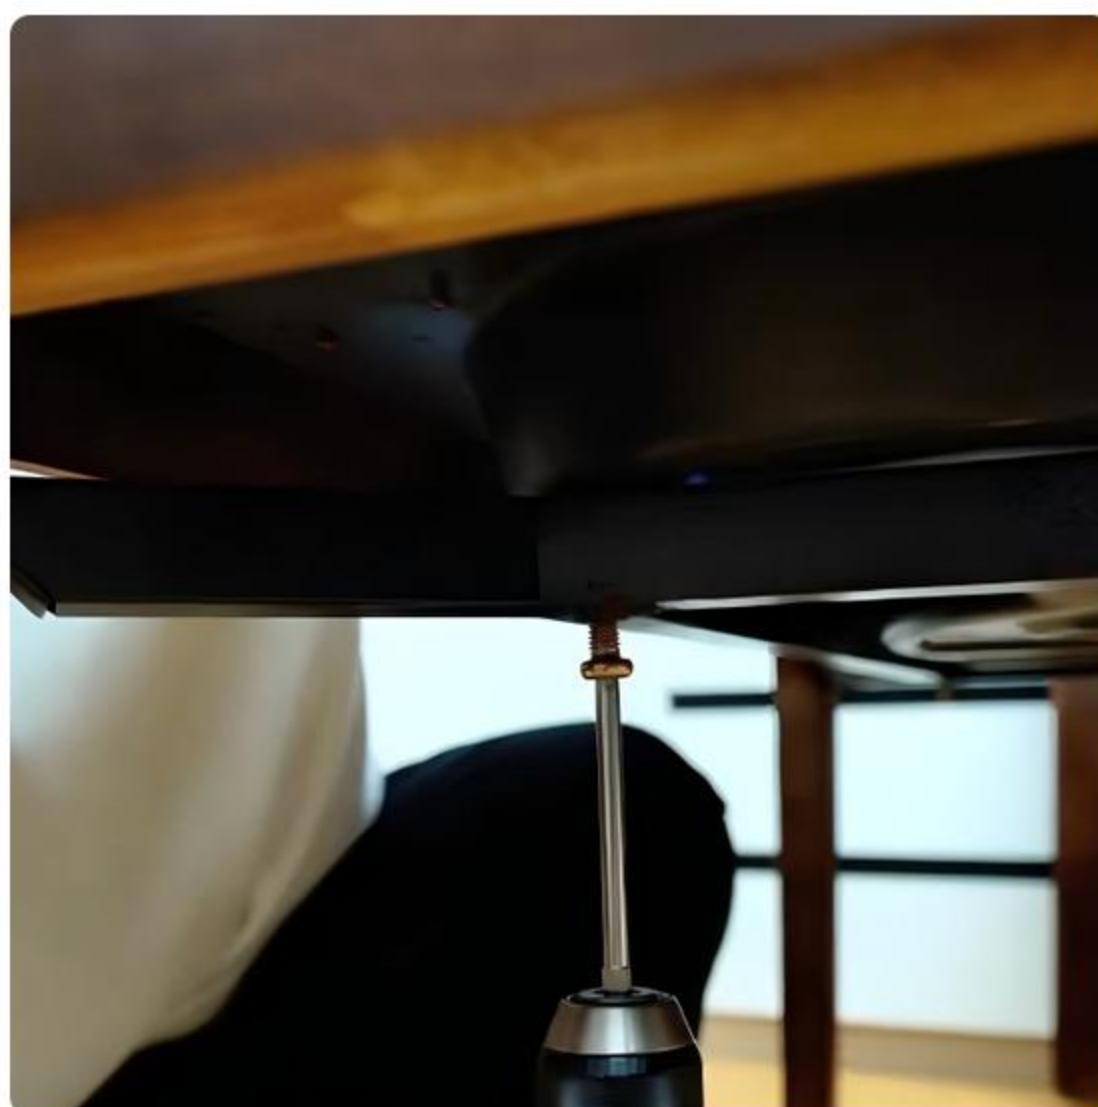

After installing the four corner screws, screw the four height-adjusting screws for the mechanism into the bottom of the grid frame.



Install the handles on all four drawers one by one.

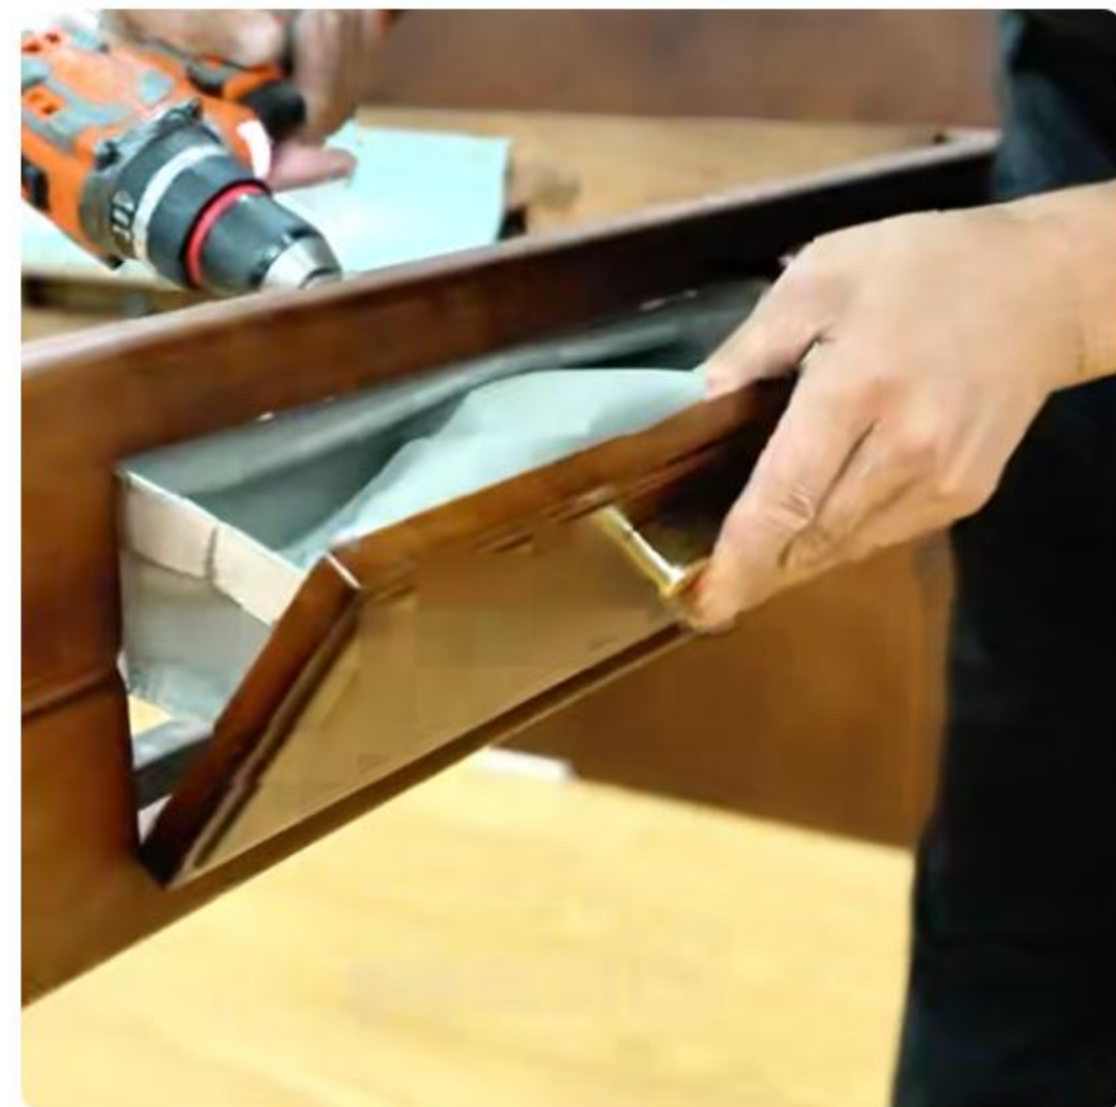

After all four corners are adjusted, cover it with the panel, and the mahjong table installation is complete.

