

ASSEMBLY INSTRUCTIONS

AJ-DJ505921




























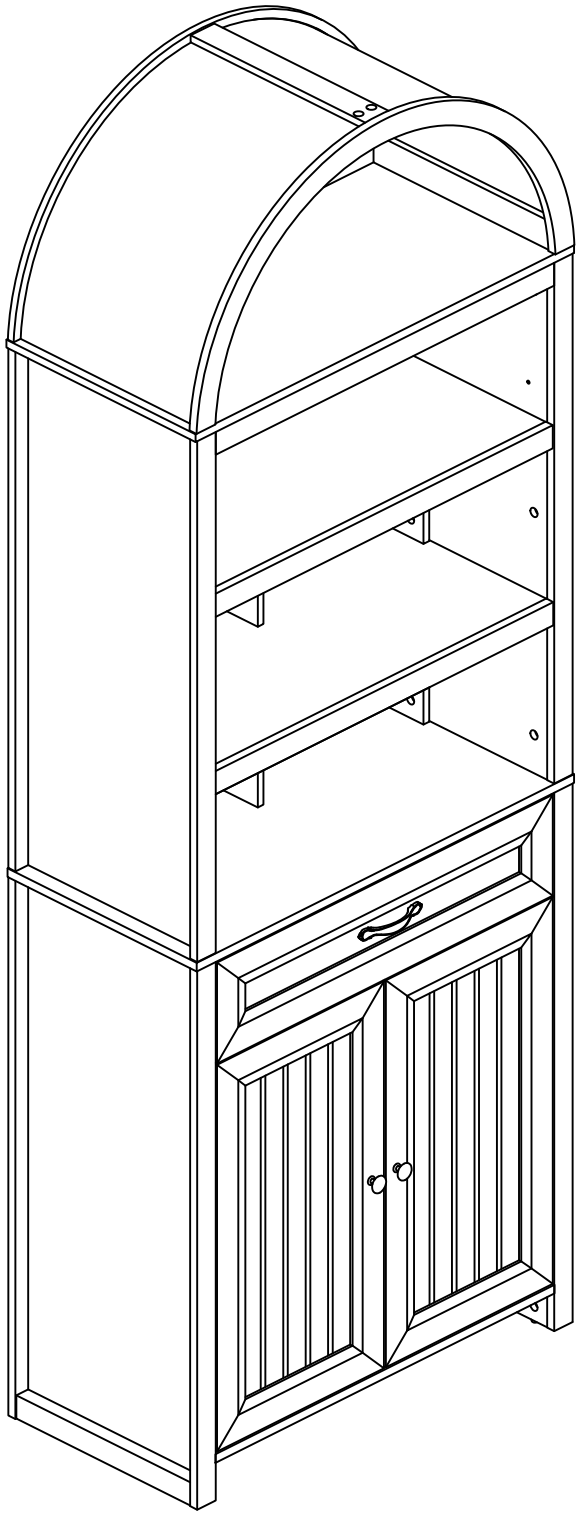


version: 1.0












ASSEMBLY INSTRUCTIONS

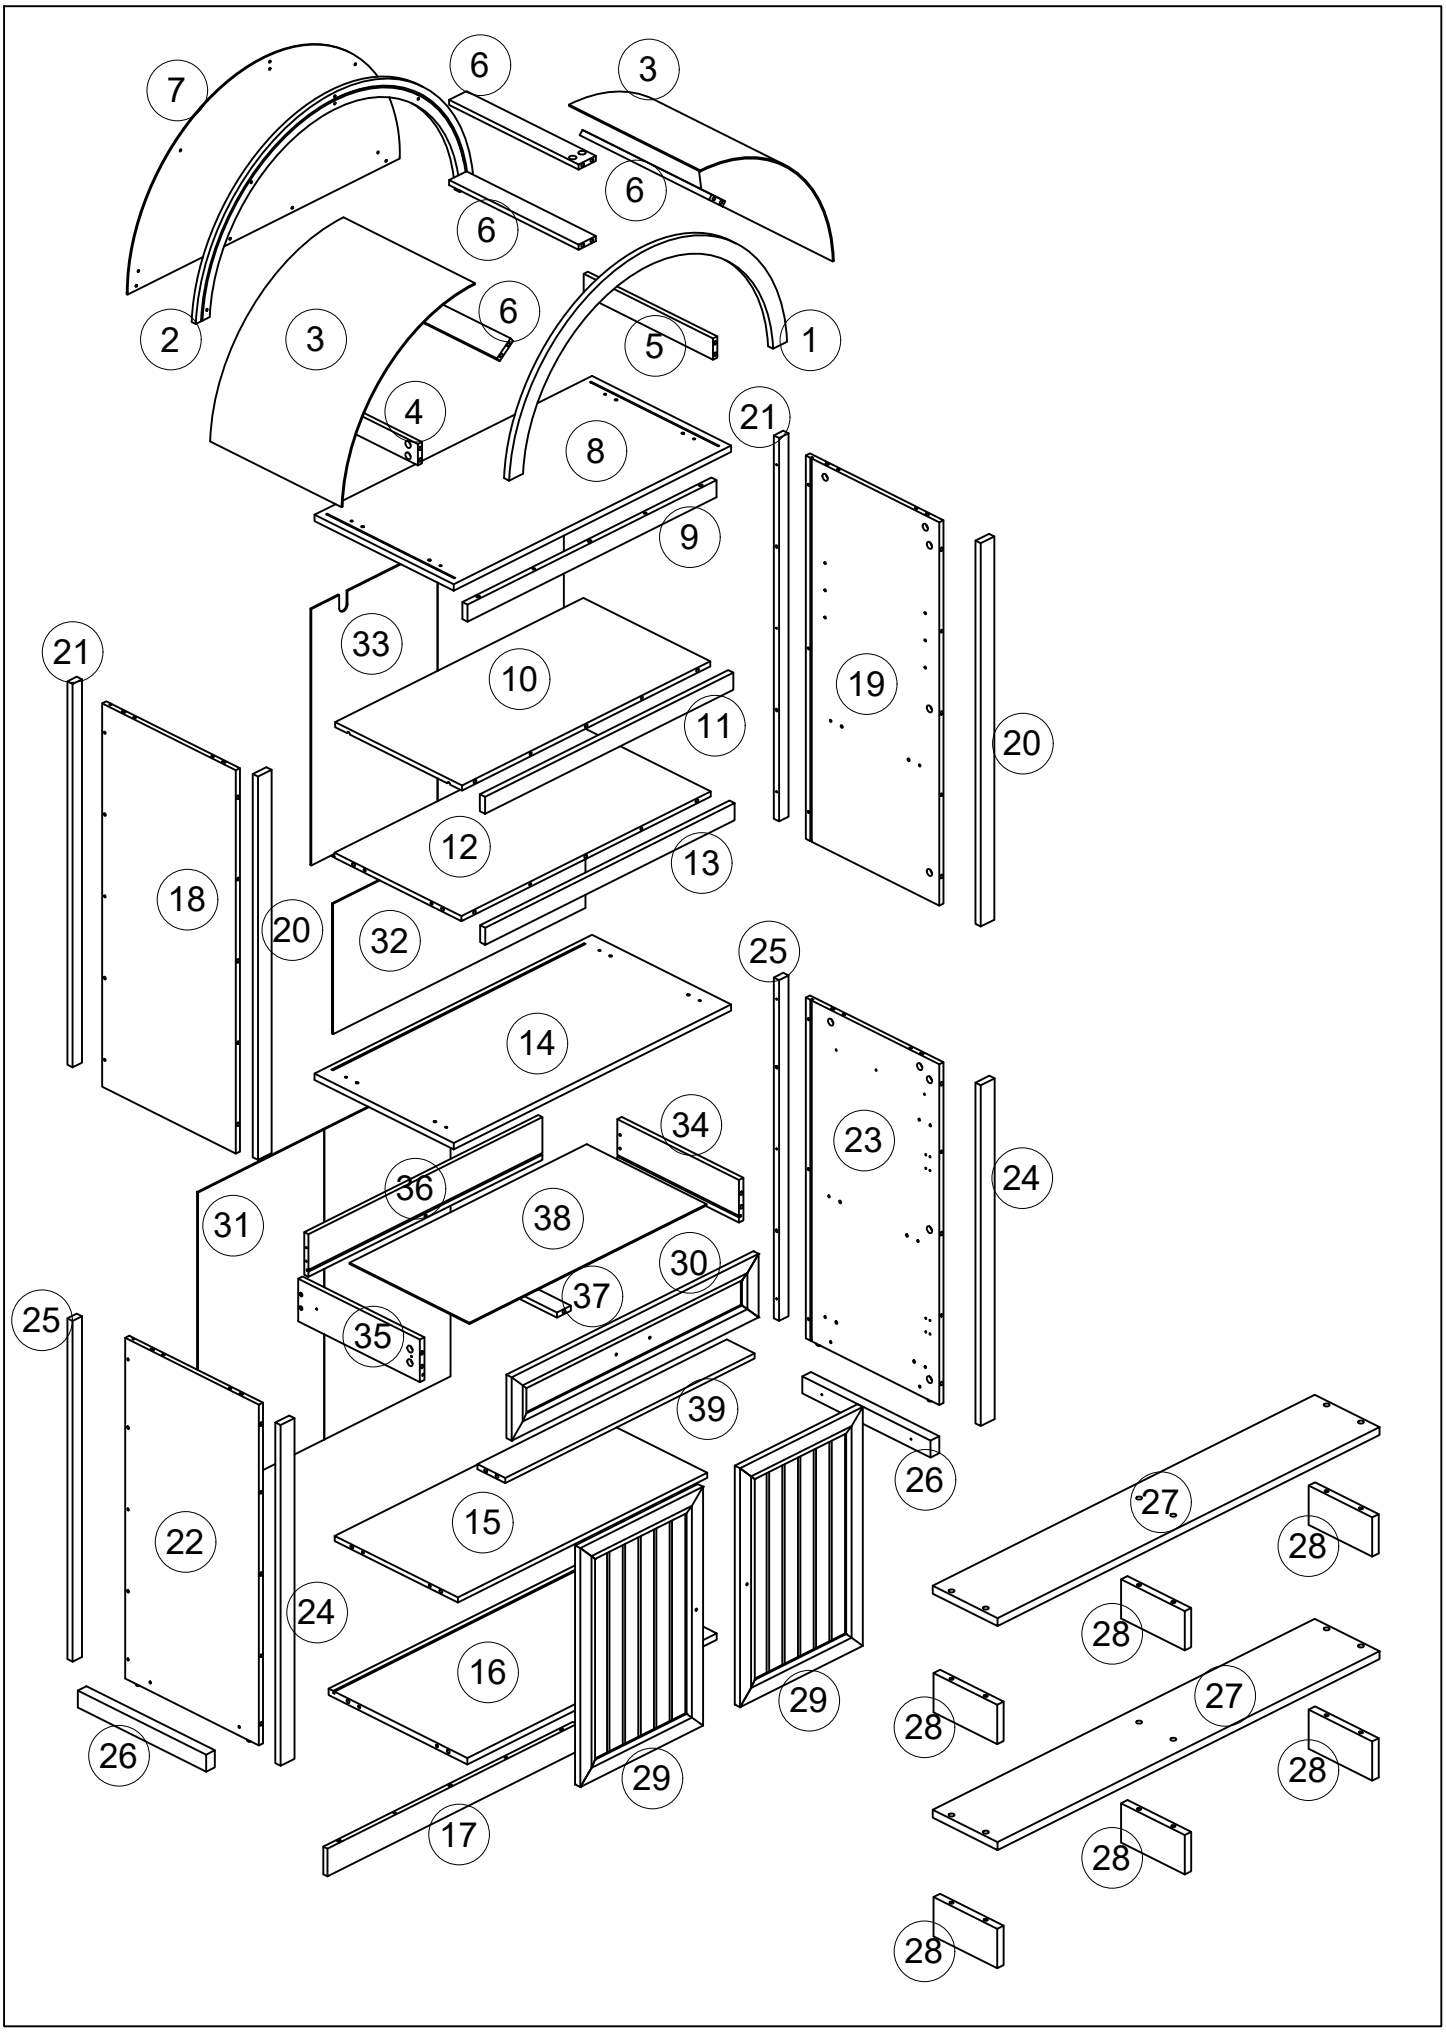


















ASSEMBLY INSTRUCTIONS

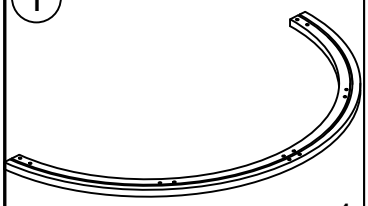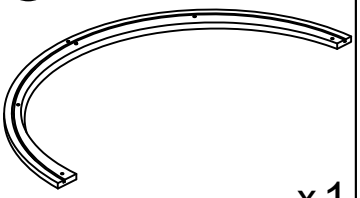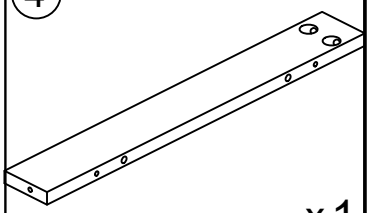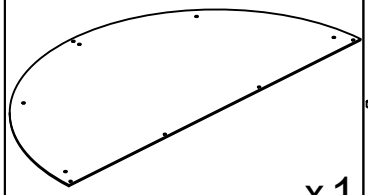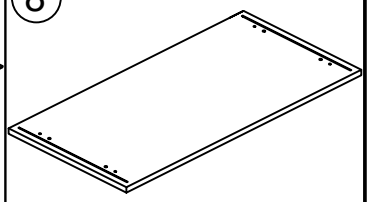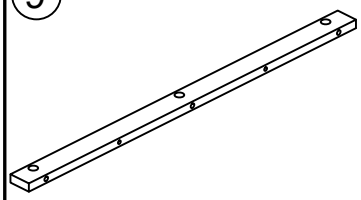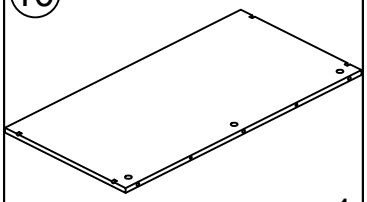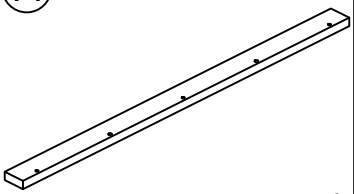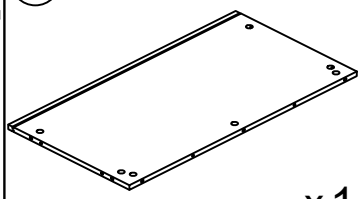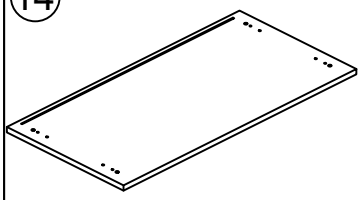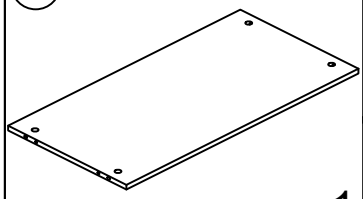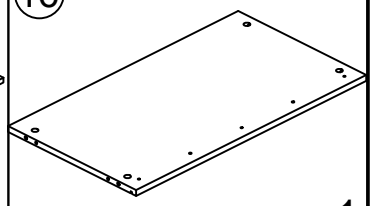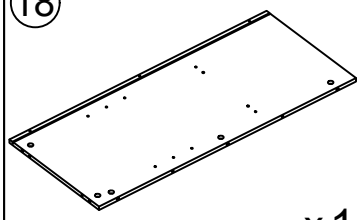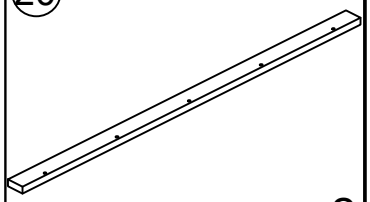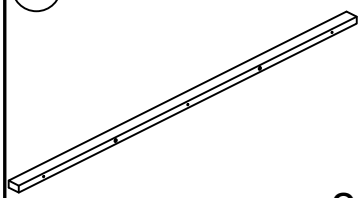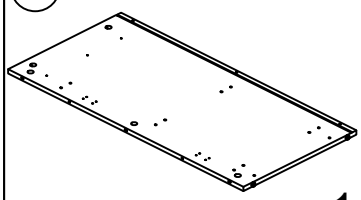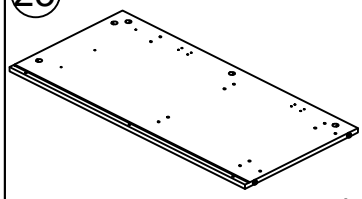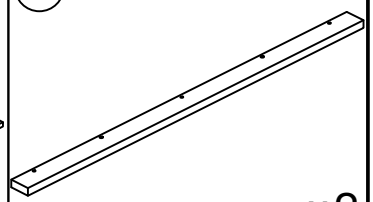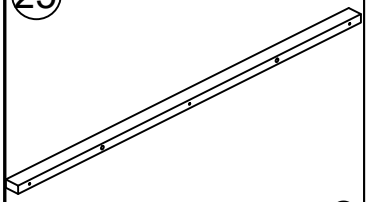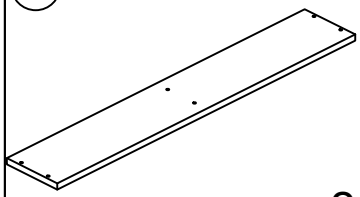
1  x 1	2  x 1	3  x 2	4  x 1
5  x 1	6  x 4	7  x 1	8  x 1
9  x 1	10  x 1	11  x 1	12  x 1
13  x 1	14  x 1	15  x 1	16  x 1
17  x 1	18  x 1	19  x 1	20  x 2
21  x 2	22  x 1	23  x 1	24  x 2
25  x 2	26  x 2	27  x 2	28  x 6


ASSEMBLY INSTRUCTIONS

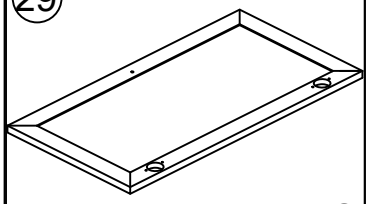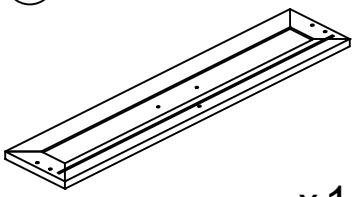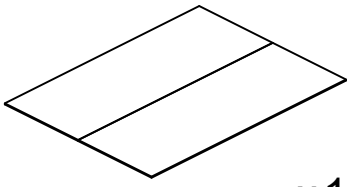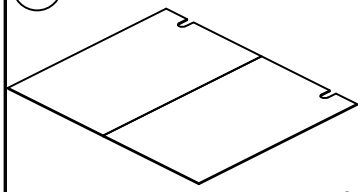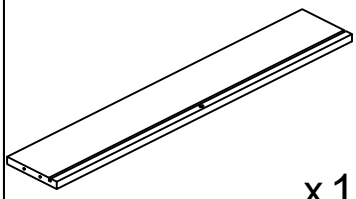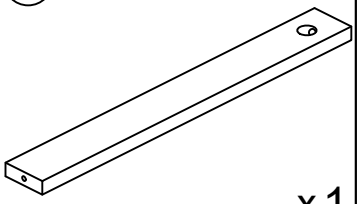29  x 2	30  x 1	31  x 1	32  x 1
33  x 1	34  x 1	35  x 1	36  x 1
37  x 1	38  x 1	39  x 1	

ASSEMBLY INSTRUCTIONS

A x52+4  Ø6x30mm	B x65+5  Ø6x35mm	C x65+5  Ø15x10mm	D x31+2  Ø5x38mm
E x1 	F x2  M4x8mm	G x1  L=340mm	H x4+1 
I x16+1  Ø8xØ4x30mm	J x2 	K x2  M4x20mm	L x4 
M x38+2  Ø7xØ3.5x12mm	N x2  Ø8xØ4x38mm  Ø8xØ4x12mm	O x22+2  Ø6xØ3x16mm	P x65+5  Ø20mm
Q x1  3mm	R x4+1  Ø7xØ3.5x12mm	x1 	

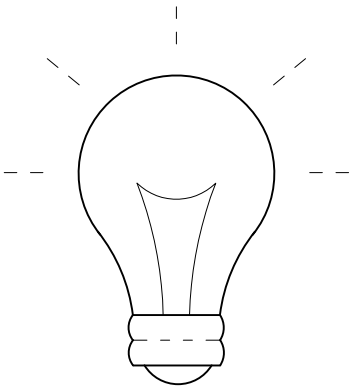

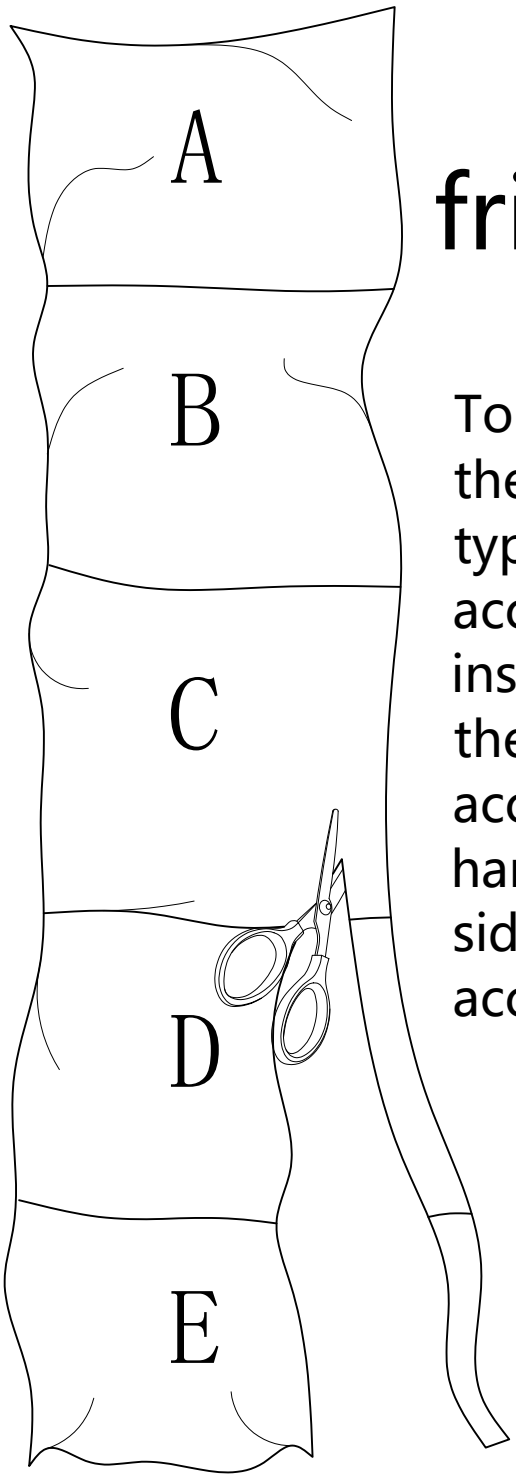


friendly reminder

To avoid errors and confusion during the installation of accessories, use the type and quantity of hardware accessories according to the installation procedure described in the instructions. First, unroll the accessories bag and lay out the hardware accessories, cut holes in the side, and take out the hardware accessories


INSTALLATION INSTRUCTION

STEP 01

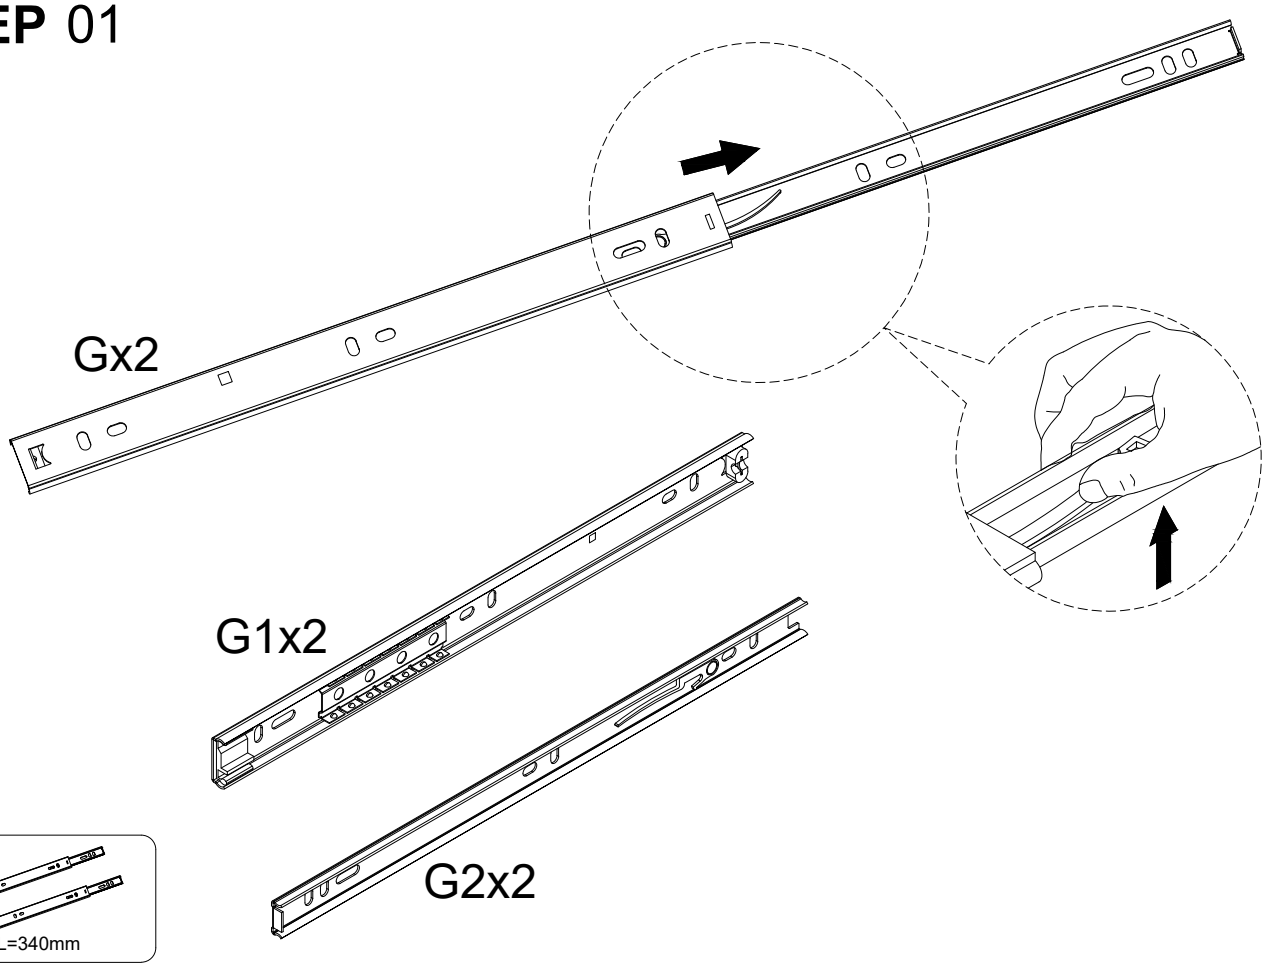

G x 1


STEP 02

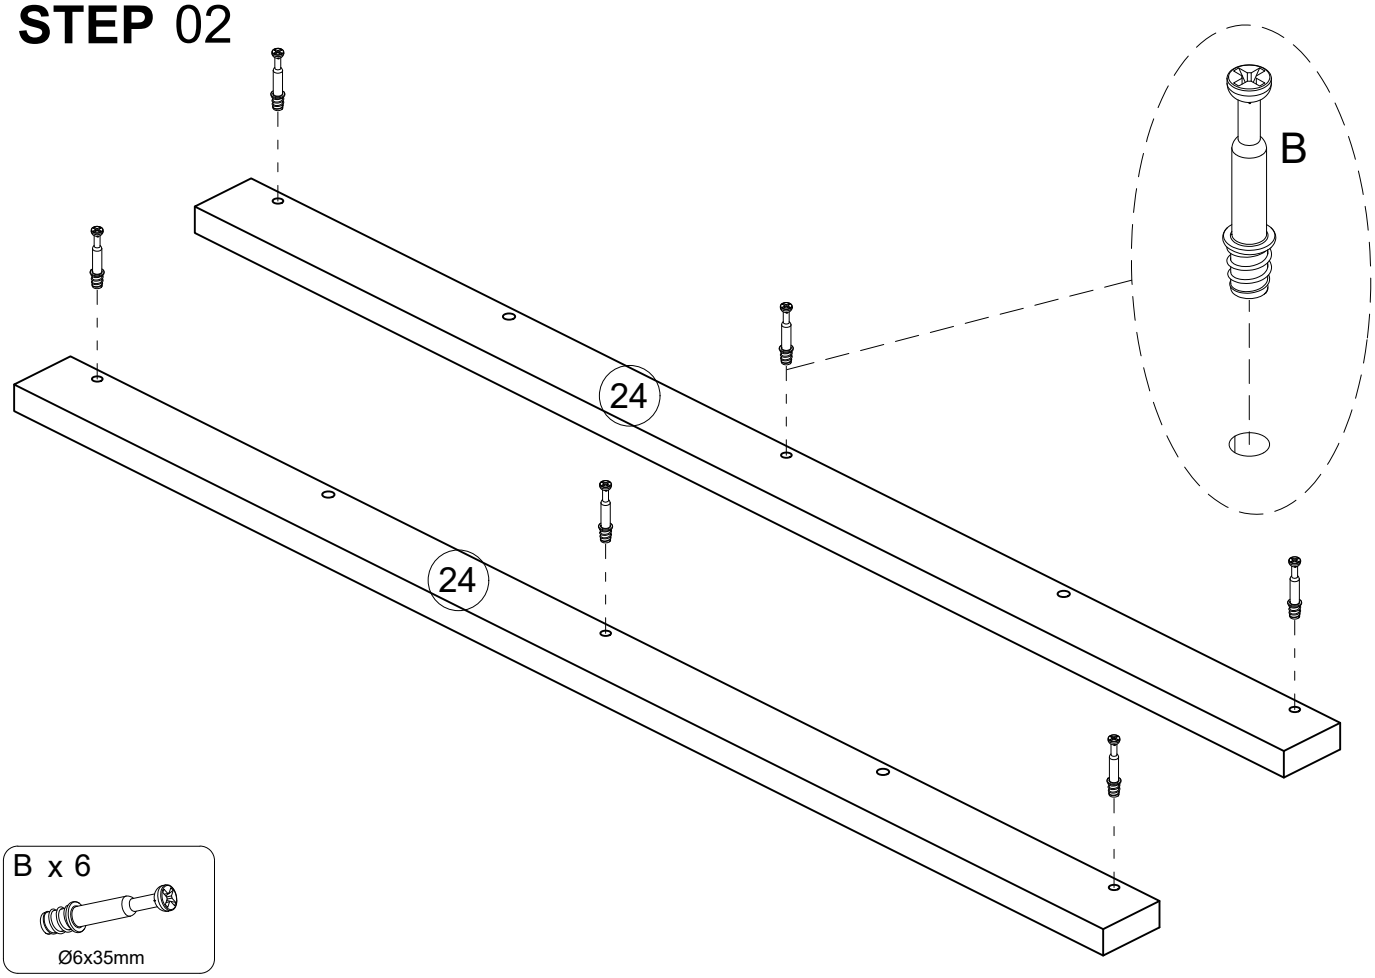

B x 6

INSTALLATION INSTRUCTION


STEP 03

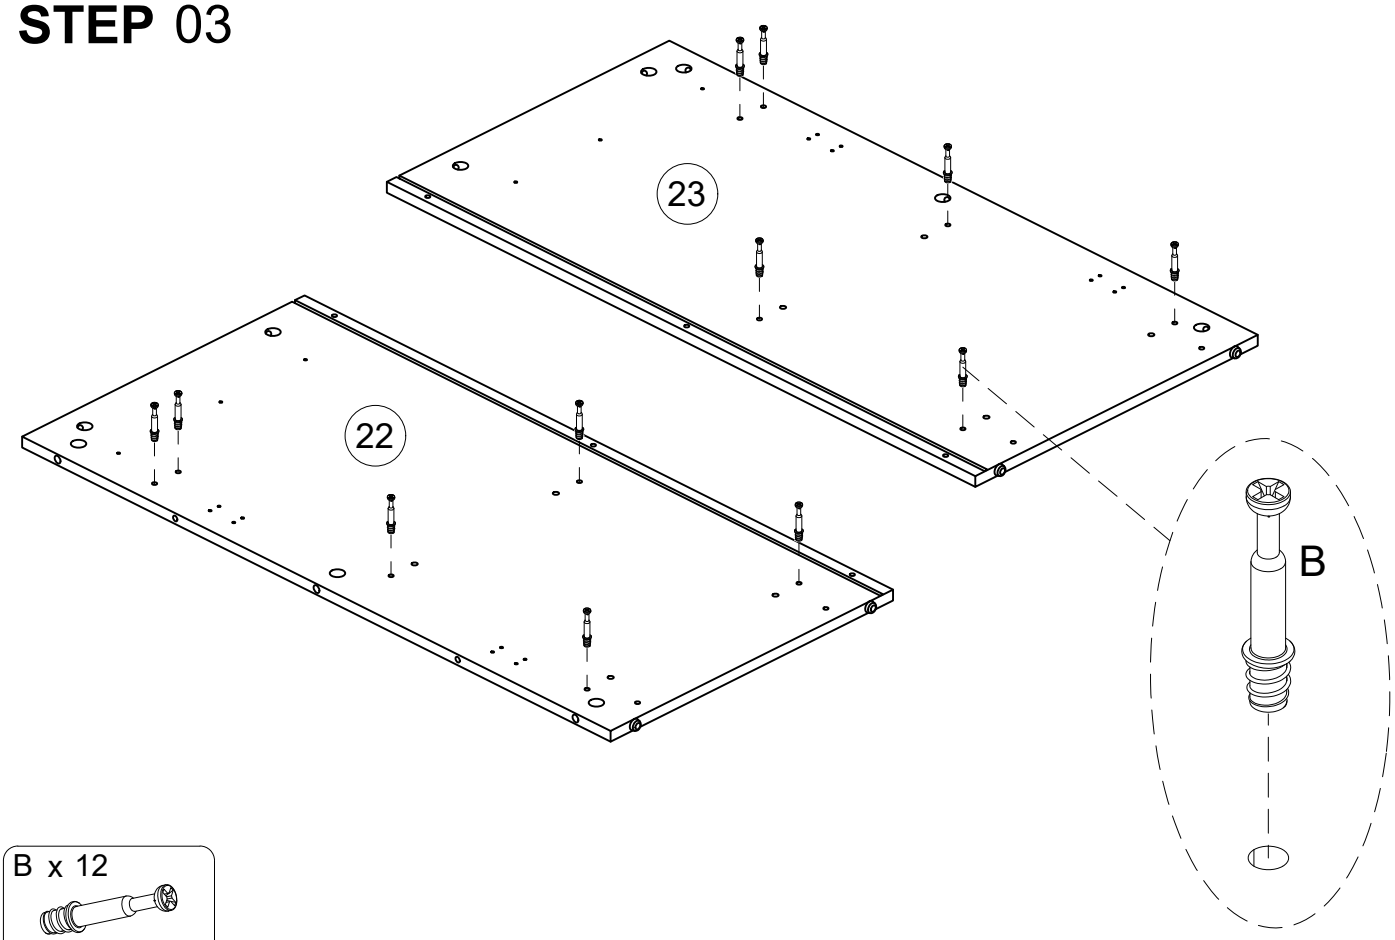

B x 12

Ø6x35mm

STEP 04

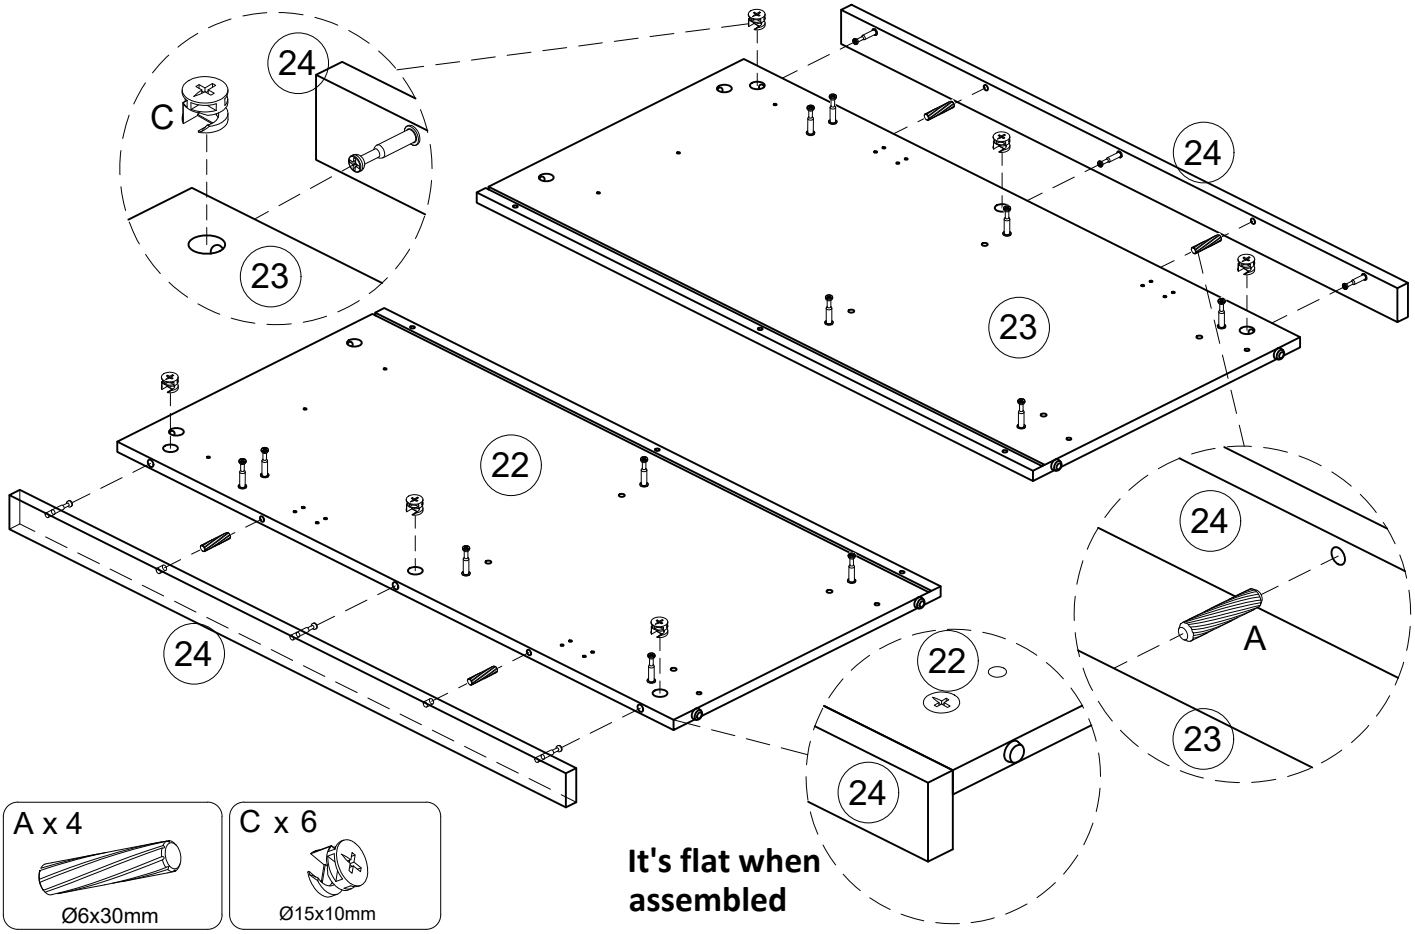

A x 4

Ø6x30mm


C x 6

Ø15x10mm

It's flat when assembled

INSTALLATION INSTRUCTION

STEP 05

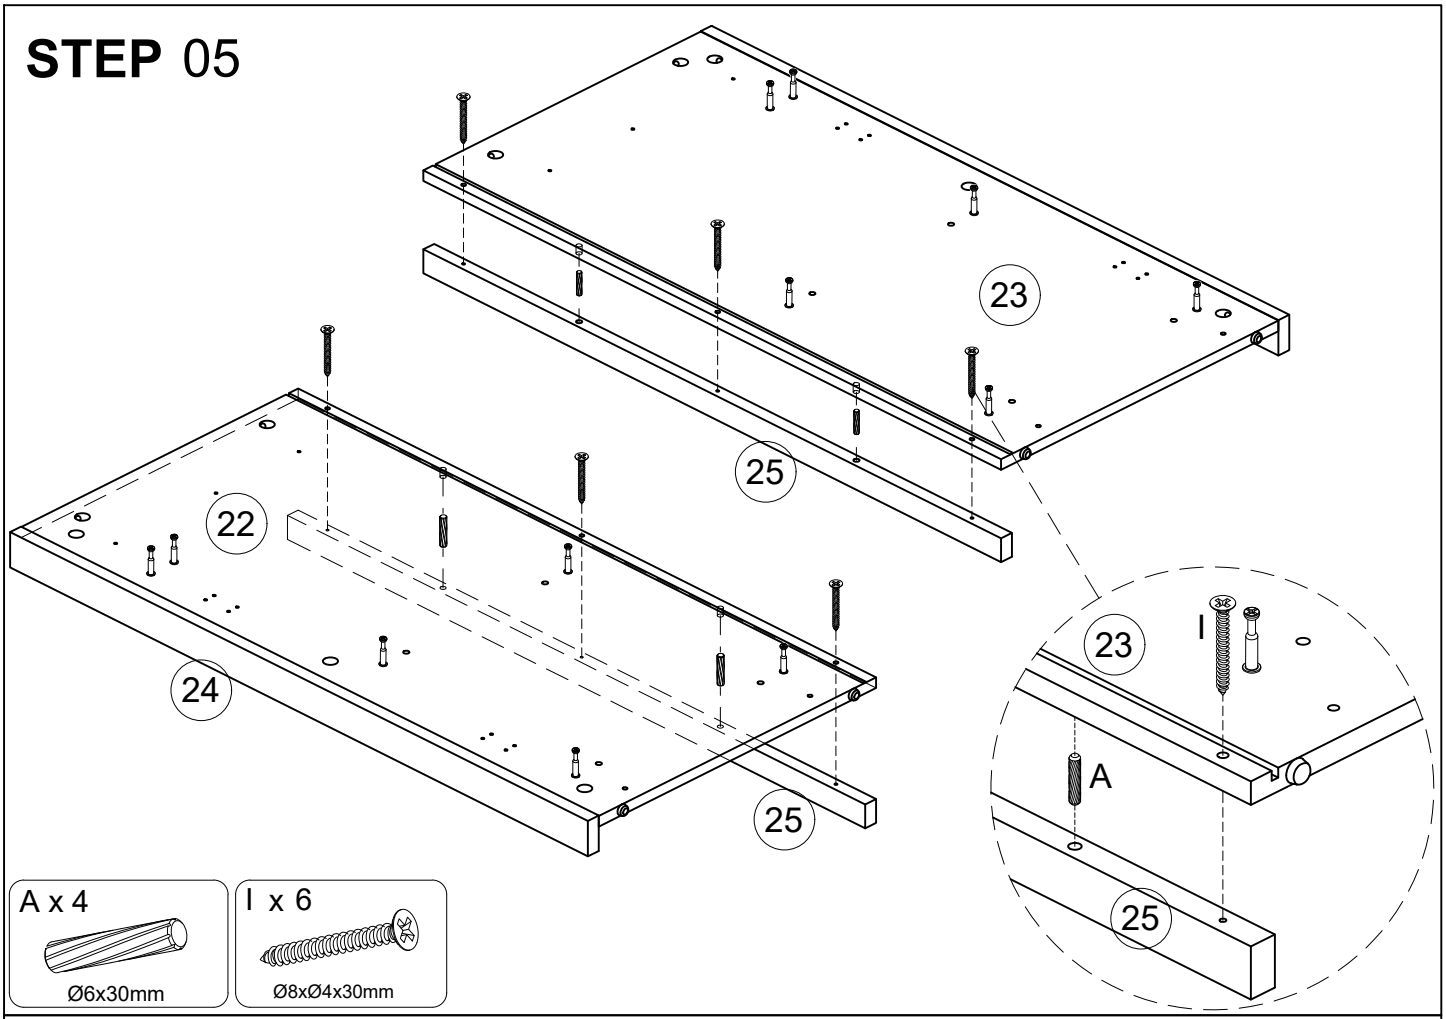


A x 4

Ø6x30mm

I x 6

Ø8xØ4x30mm

STEP 06

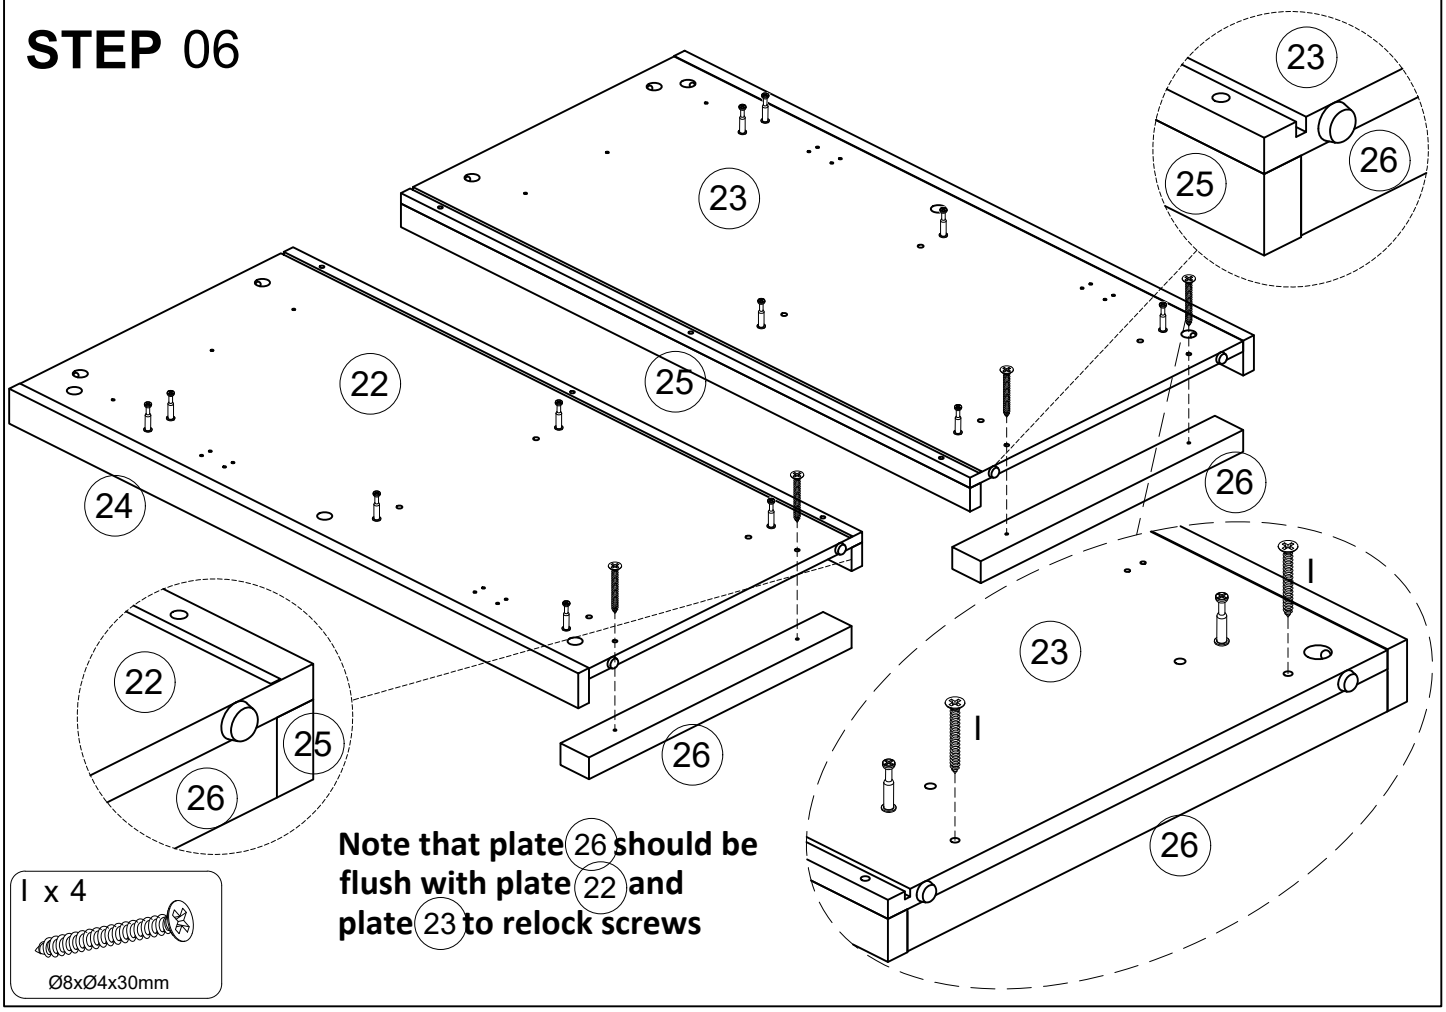


Note that plate (26) should be flush with plate (22) and plate (23) to relock screws

I x 4


Ø8xØ4x30mm

INSTALLATION INSTRUCTION

STEP 07

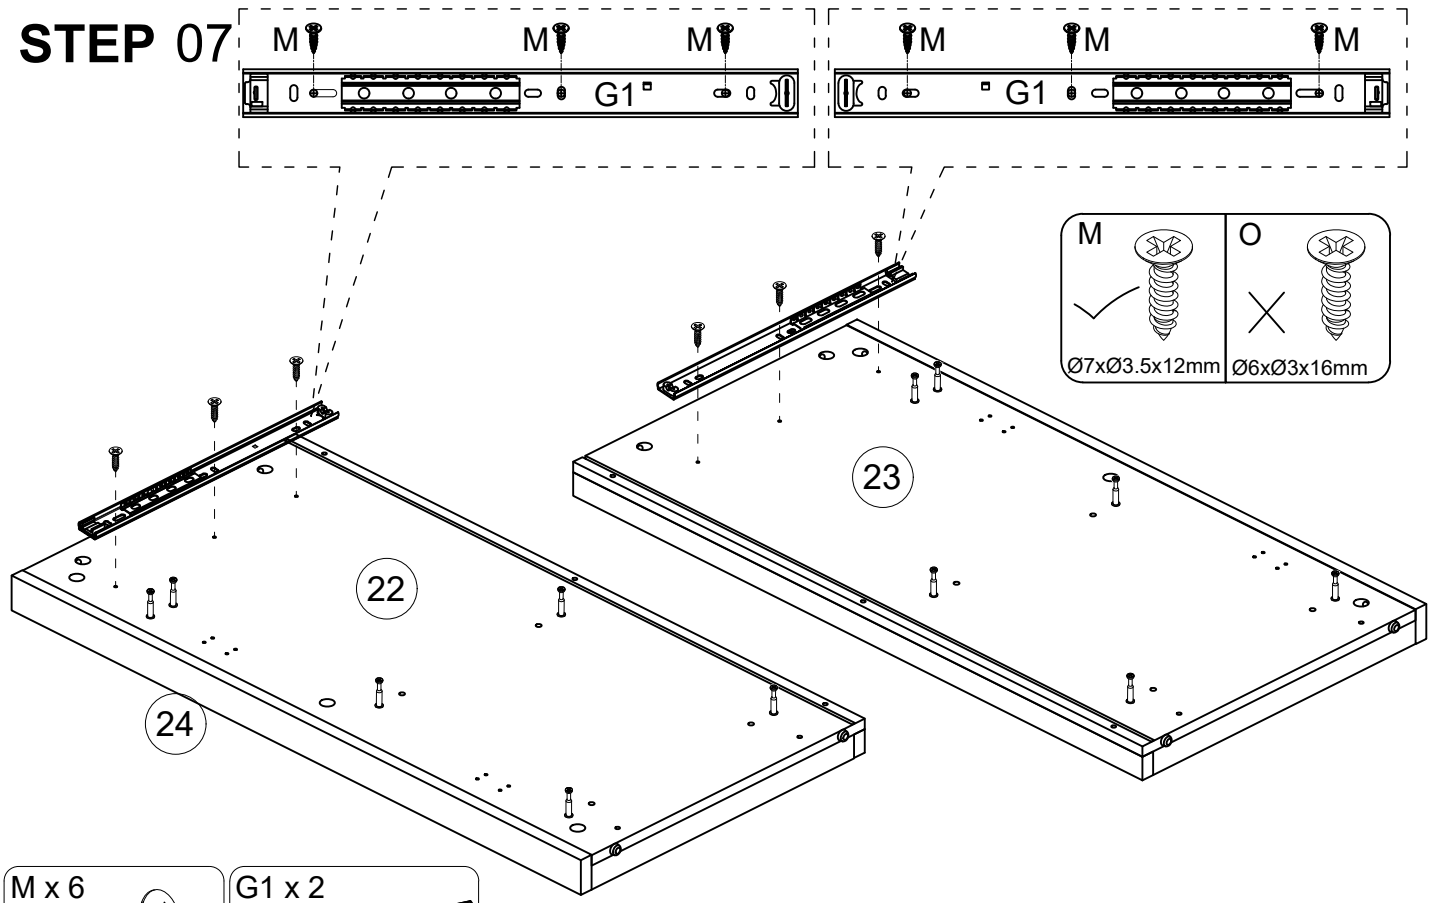


M x 6




Ø7xØ3.5x12mm

G1 x 2



L=340mm

STEP 08

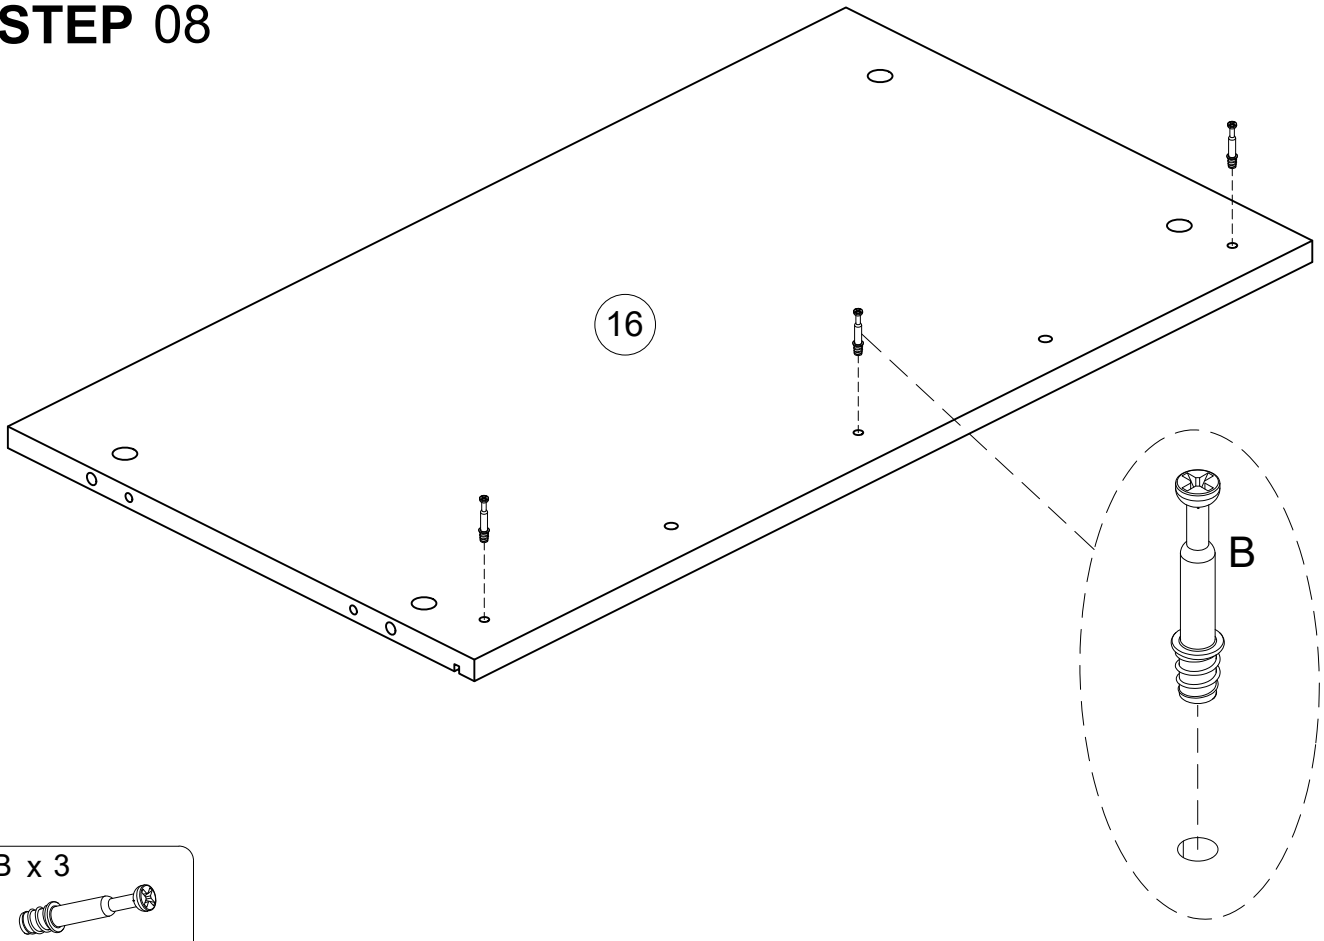


B x 3

Ø6x35mm

INSTALLATION INSTRUCTION

STEP 09

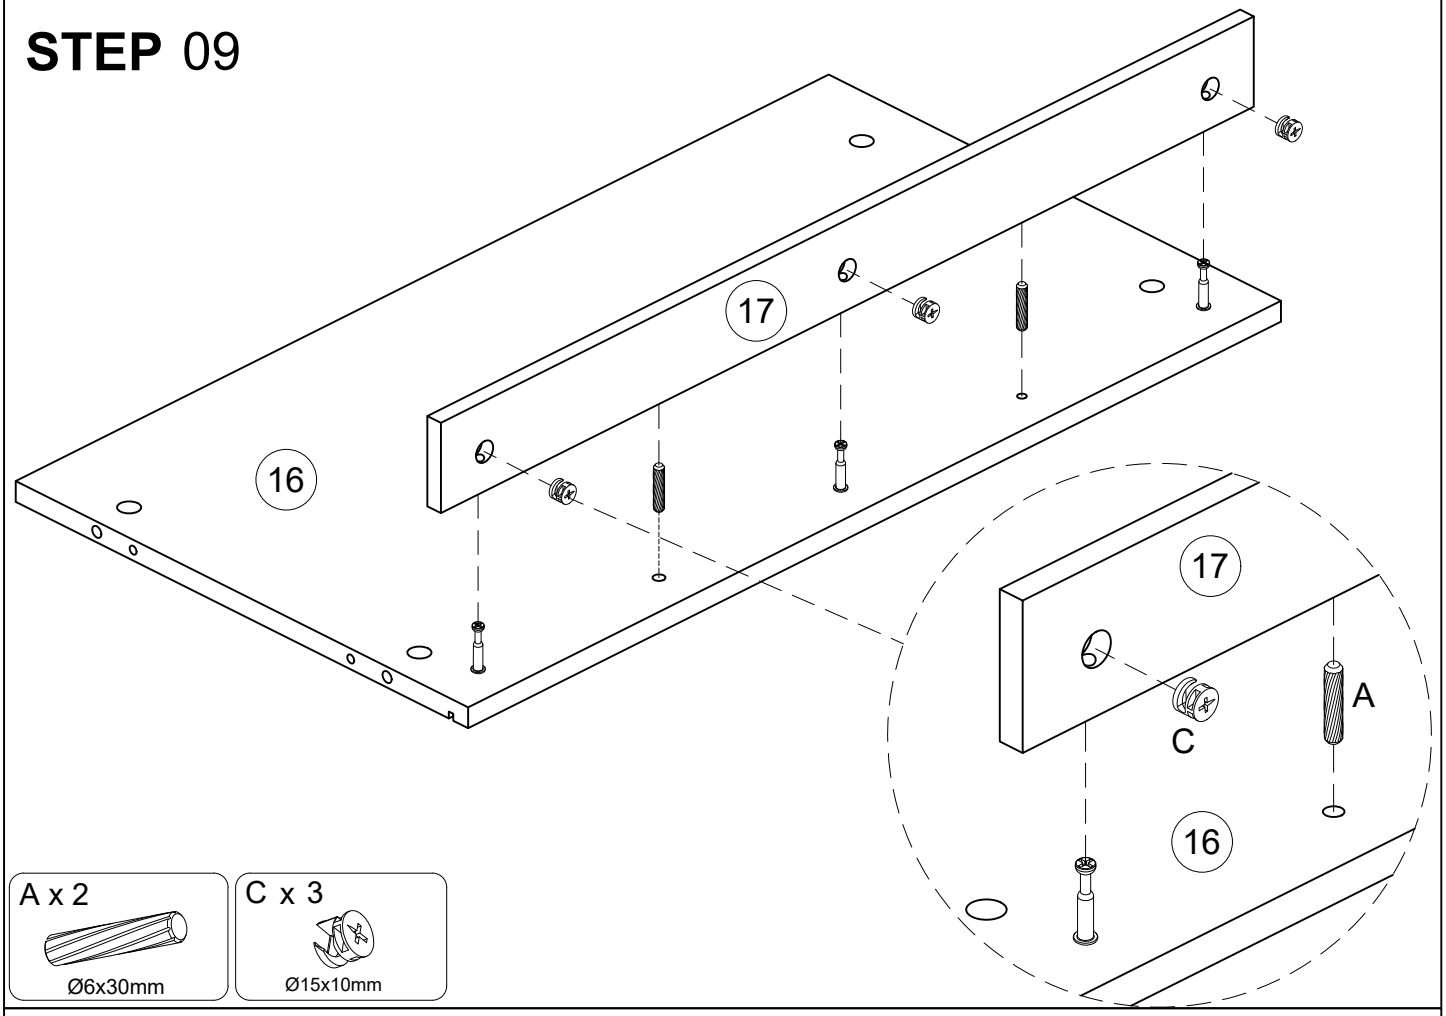


A x 2

Ø6x30mm


C x 3

Ø15x10mm


STEP 10

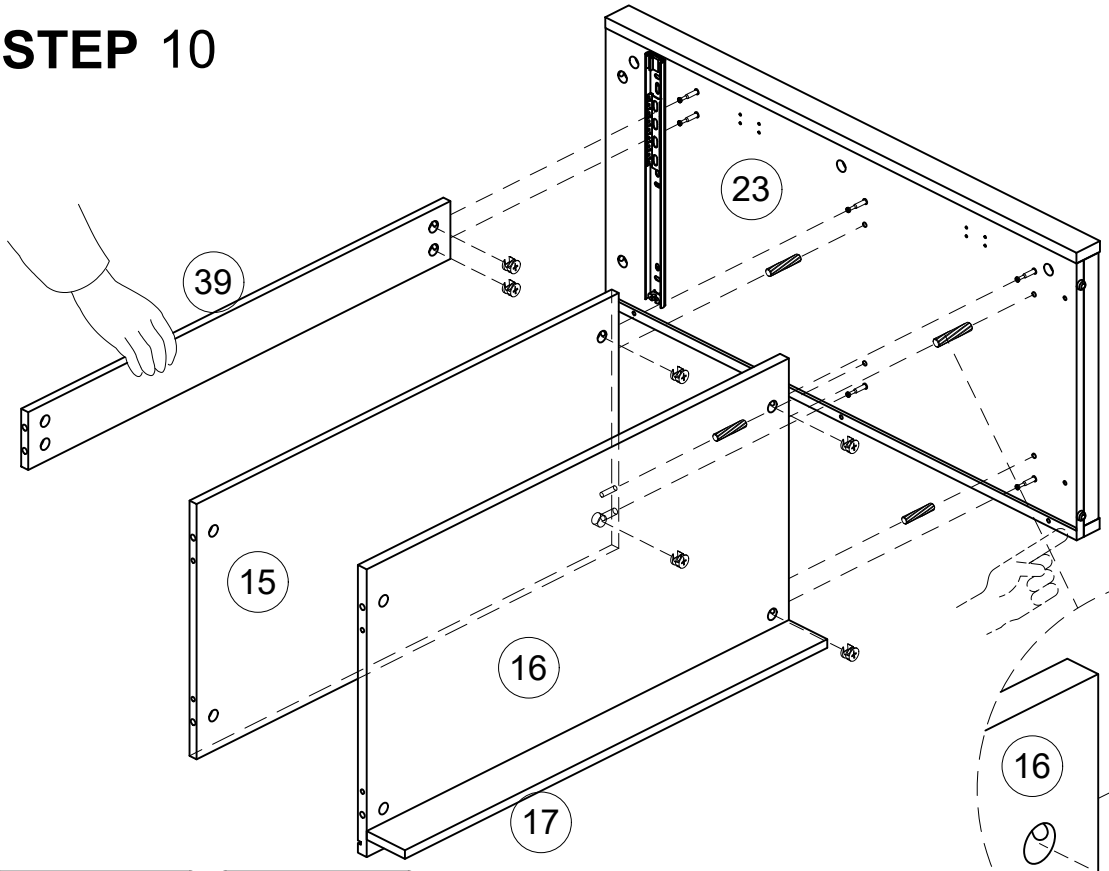

The slot is located on the inside

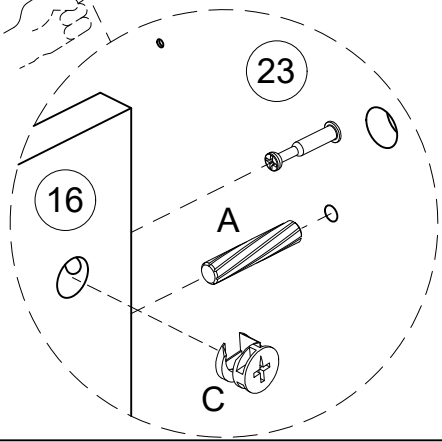

A x 4




Ø6x30mm

C x 6





Ø15x10mm

STEP 11

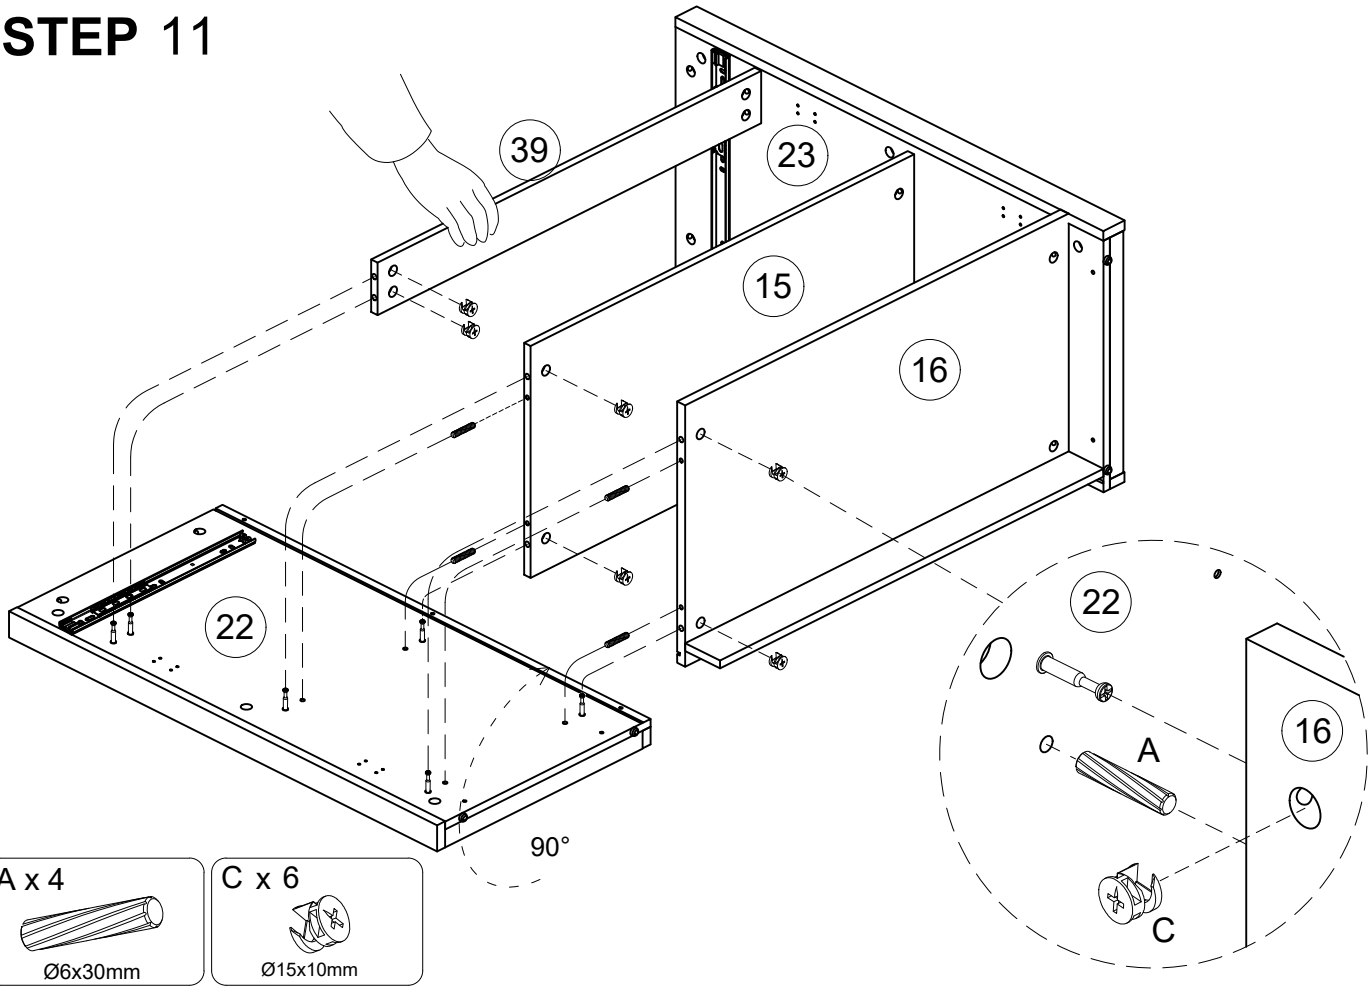

STEP 12

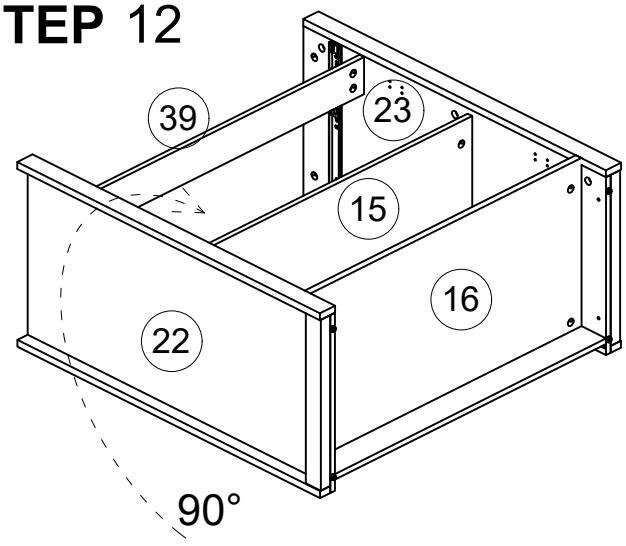


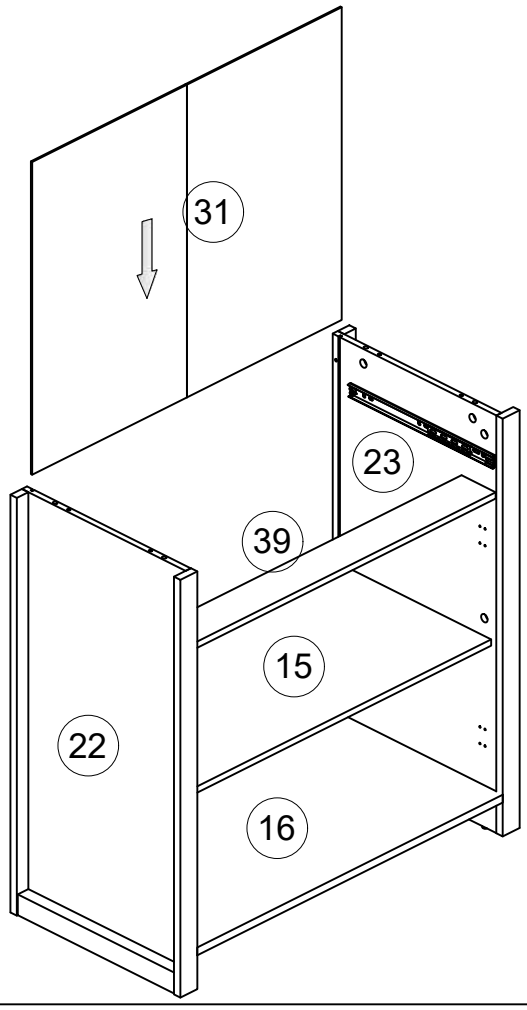

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

INSTALLATION INSTRUCTION


STEP 13

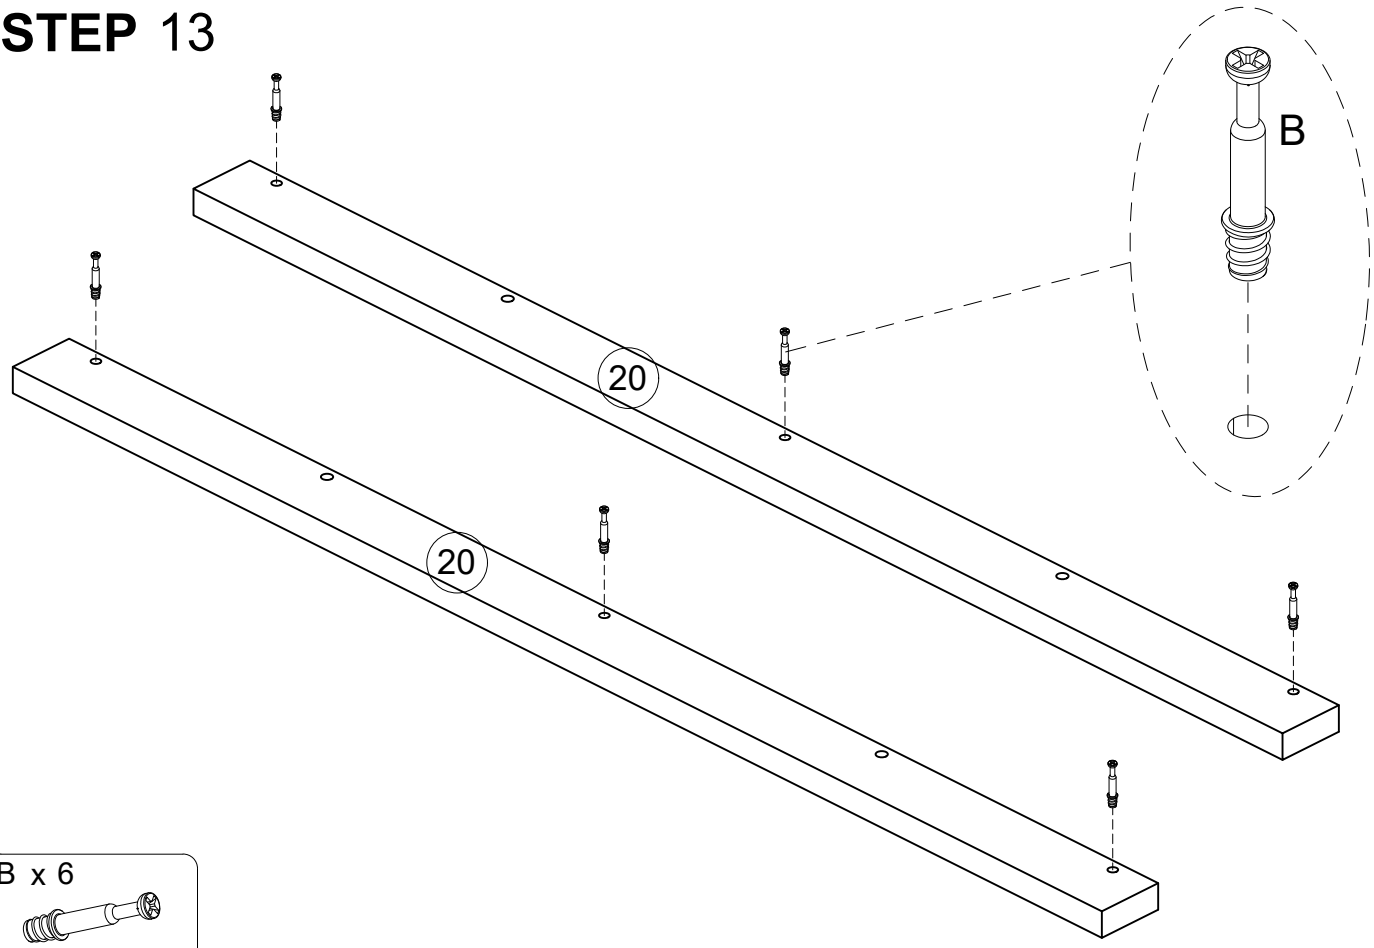

B x 6

Ø6x35mm

STEP 14

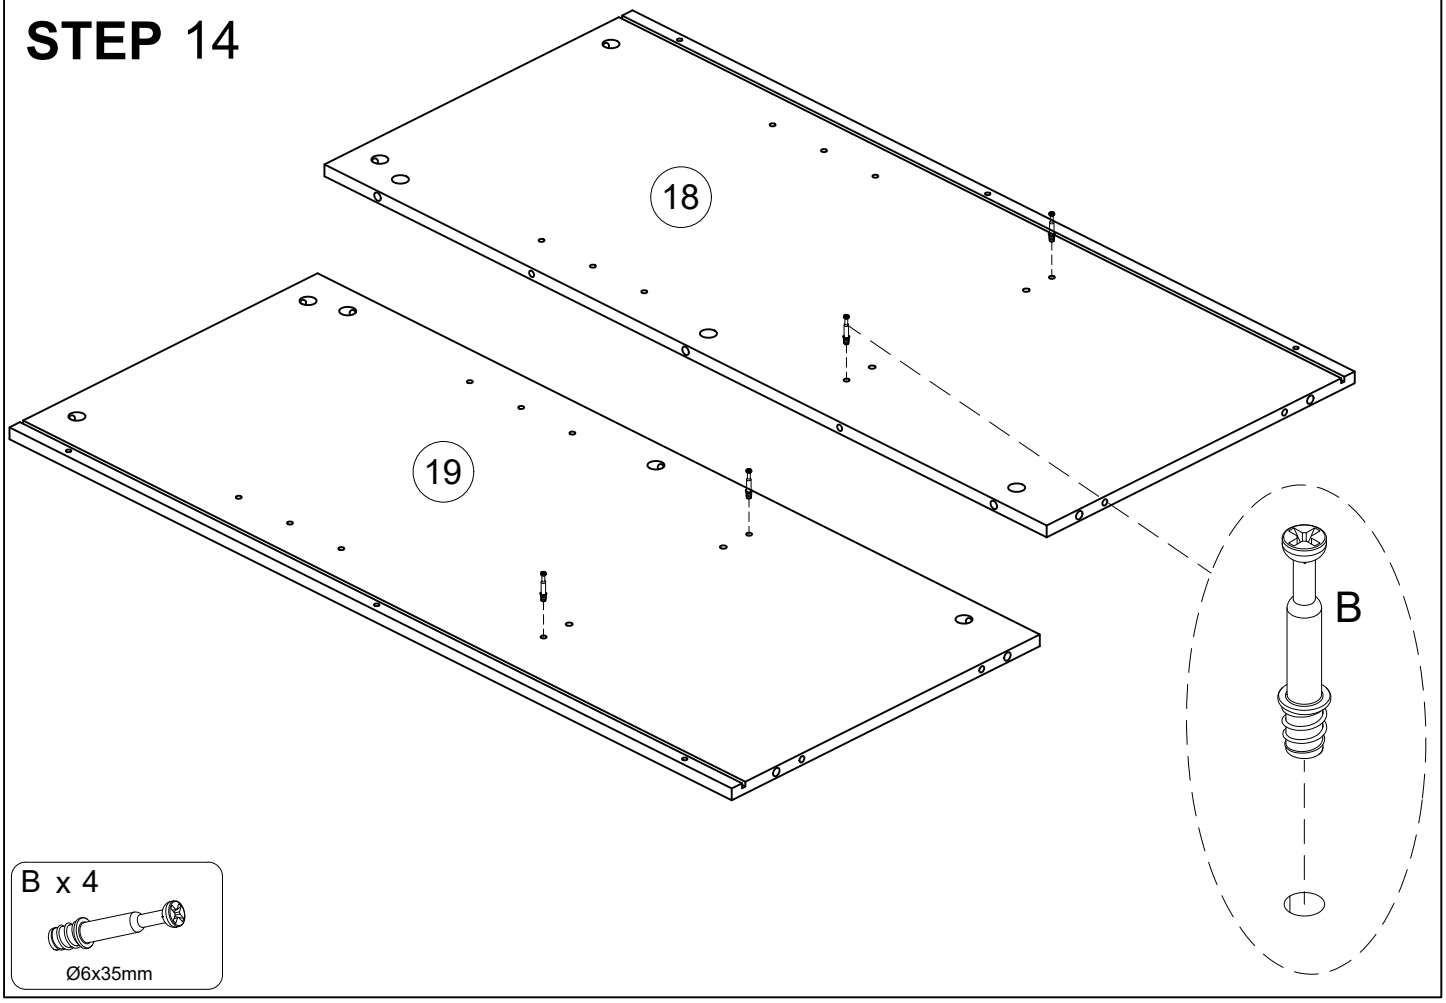


B x 4

Ø6x35mm

INSTALLATION INSTRUCTION

STEP 15

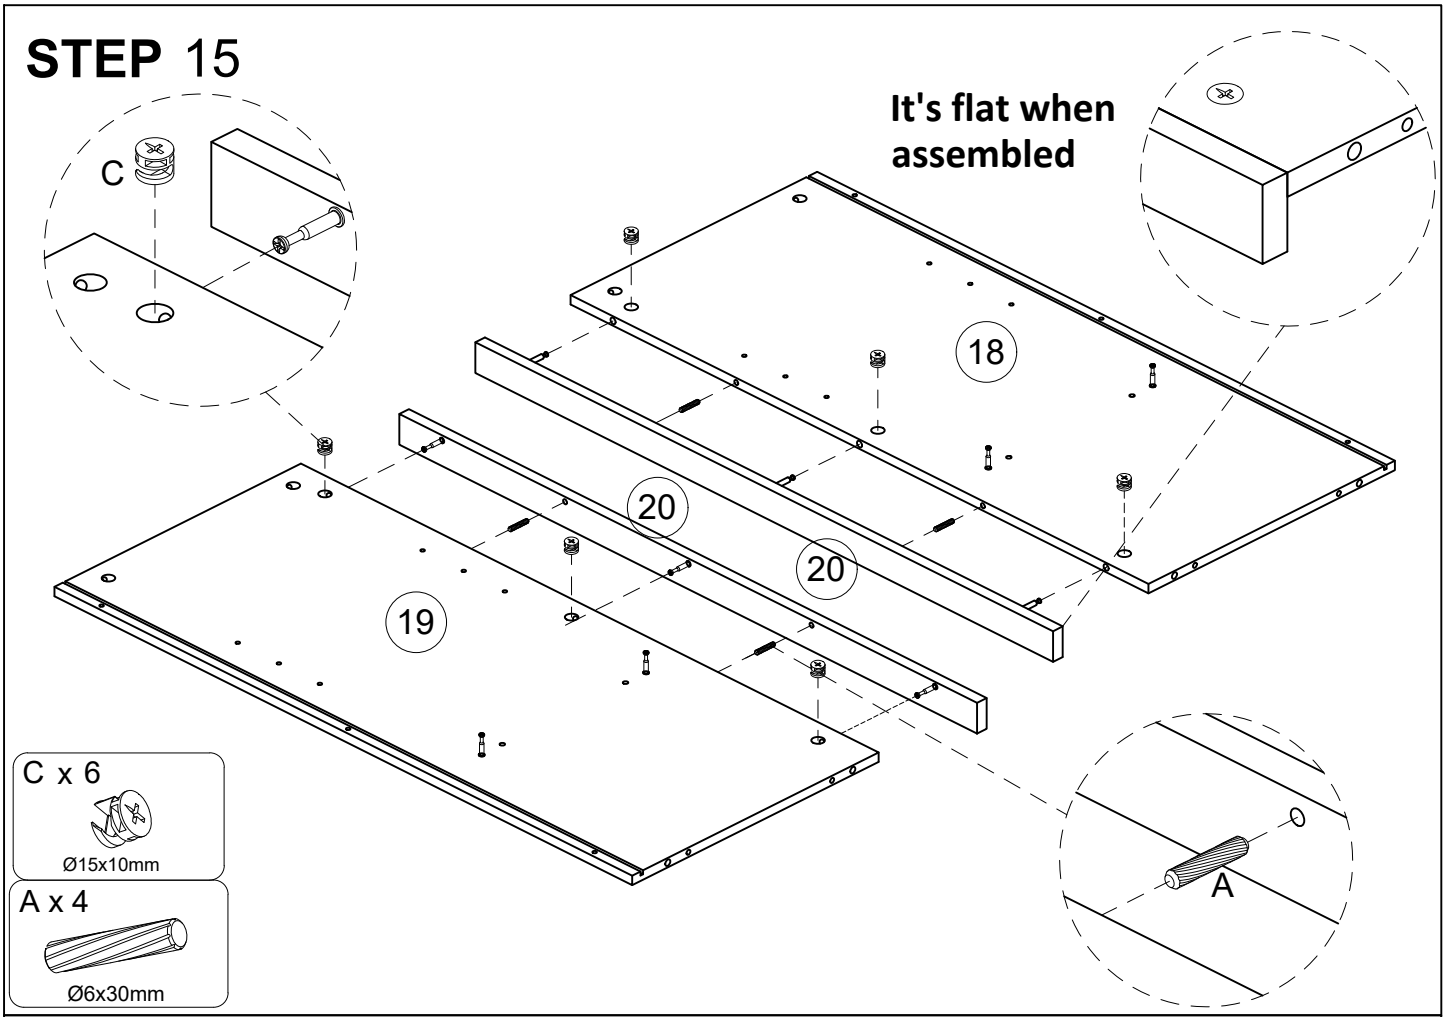


C x 6

Ø15x10mm

A x 4

Ø6x30mm

STEP 16

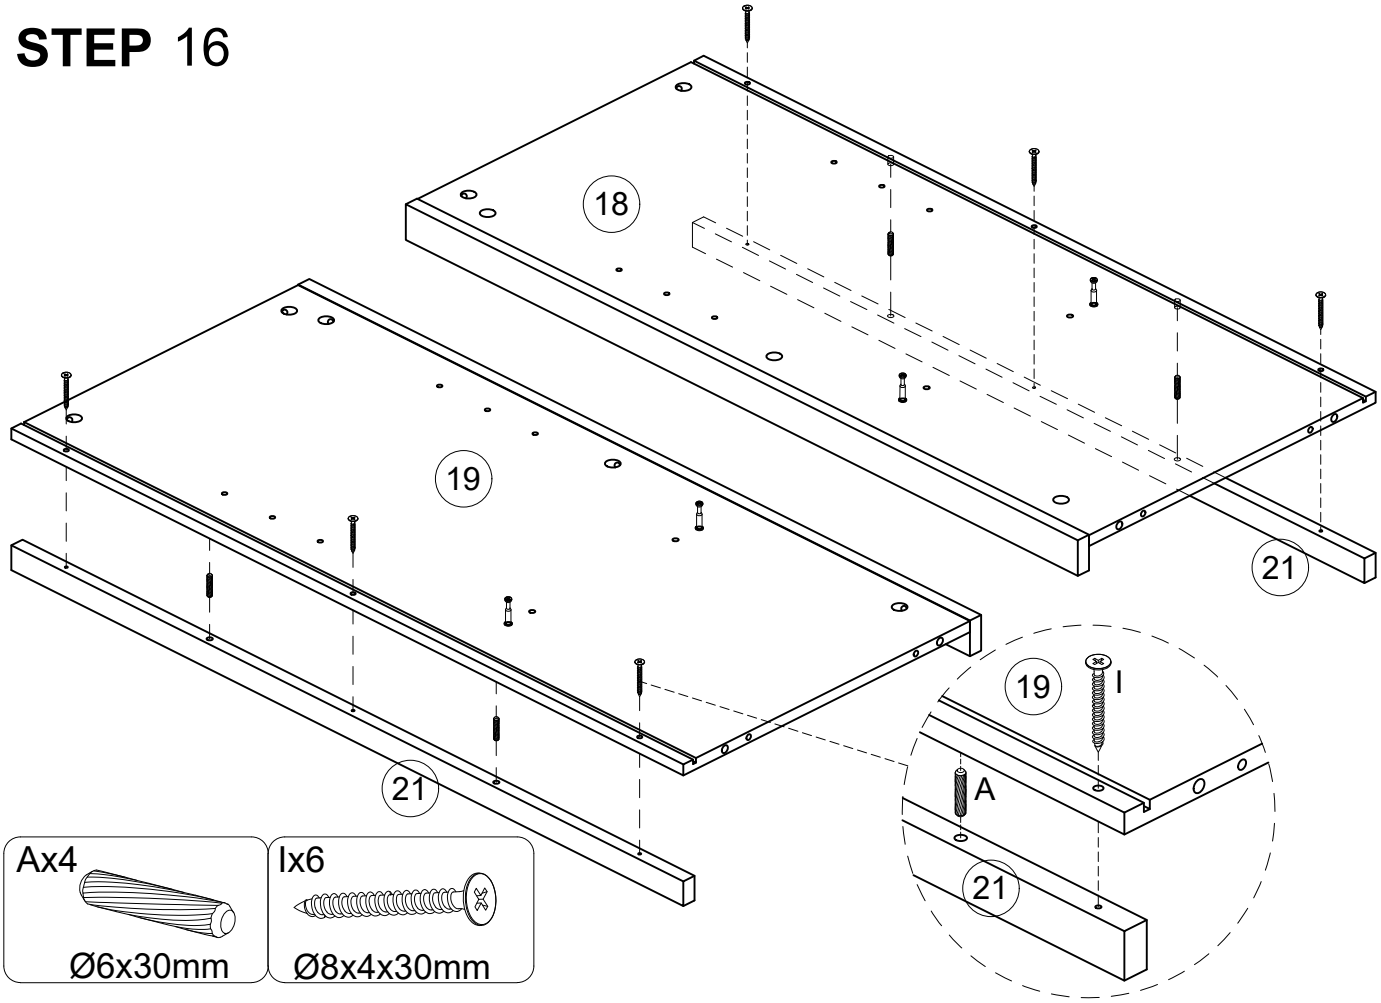


Ax4

Ø6x30mm

Ix6

Ø8x4x30mm

STEP 17

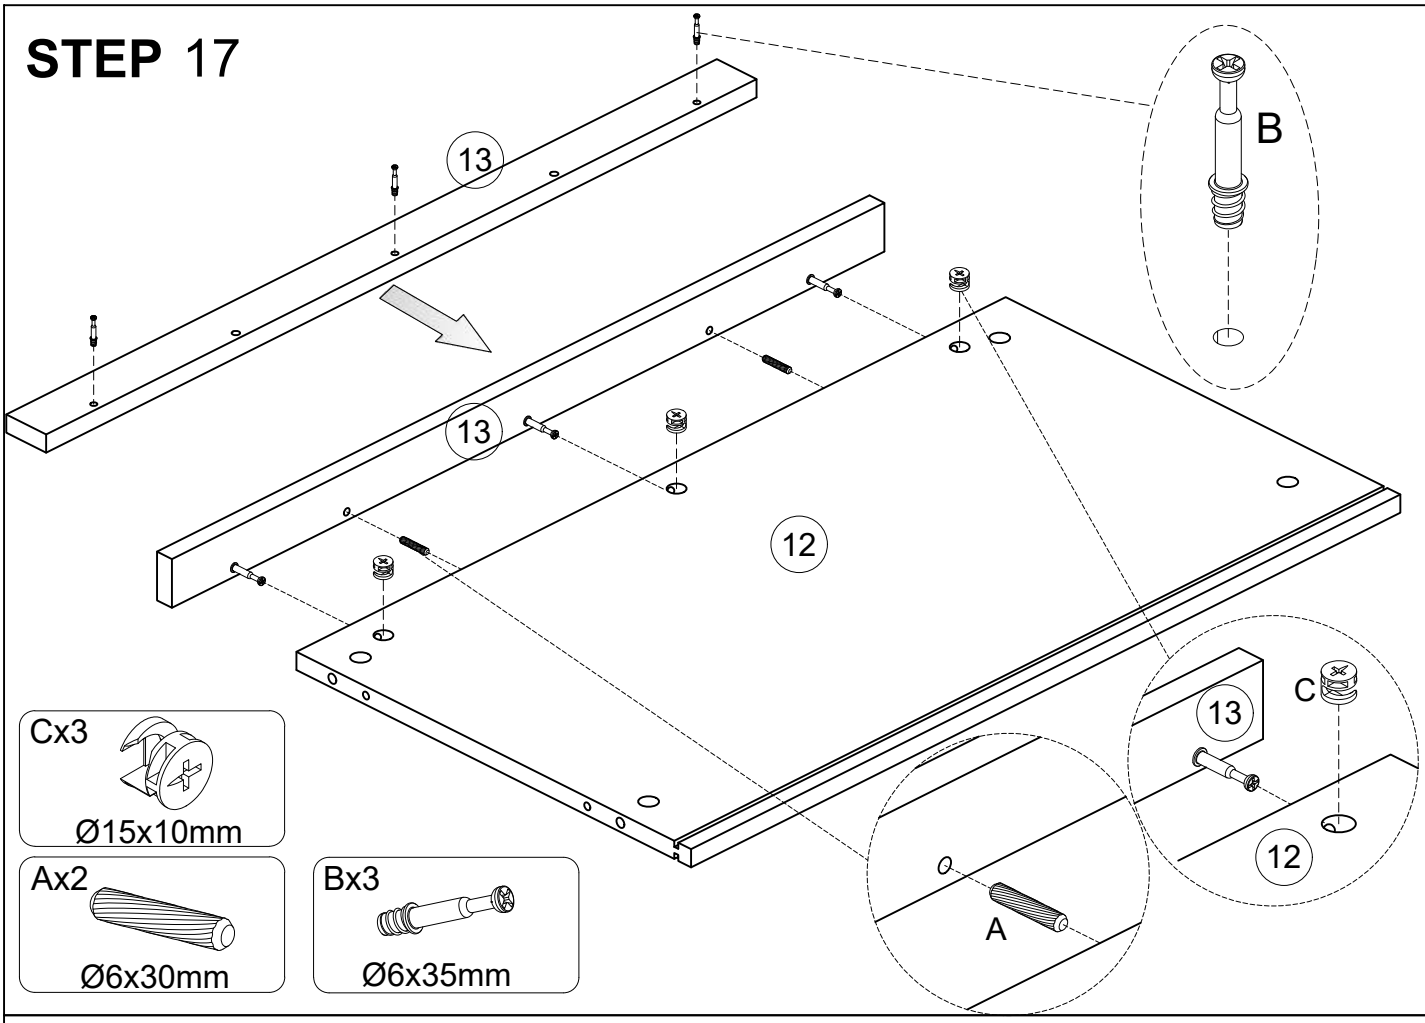

Cx3

Ø15x10mm


Ax2


Ø6x30mm


Bx3

Ø6x35mm


STEP 18

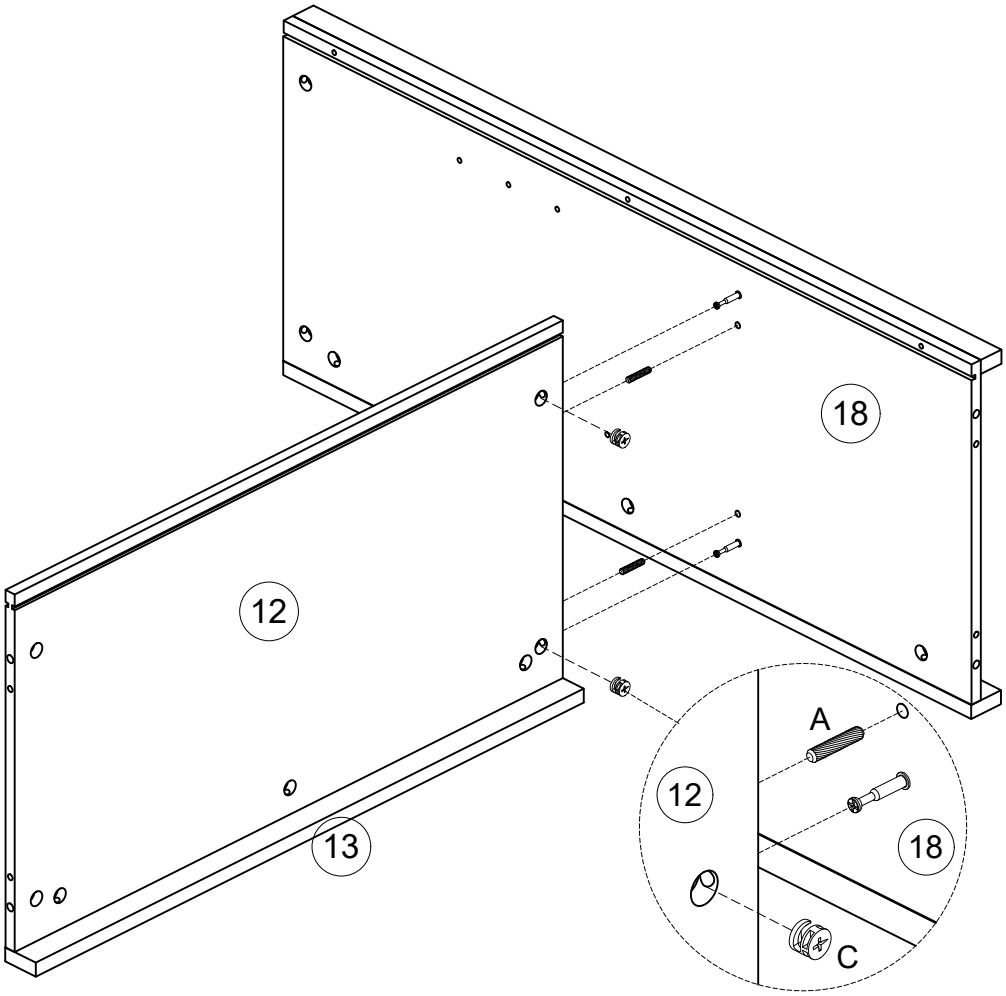

Cx2

Ø15x10mm

Ax2

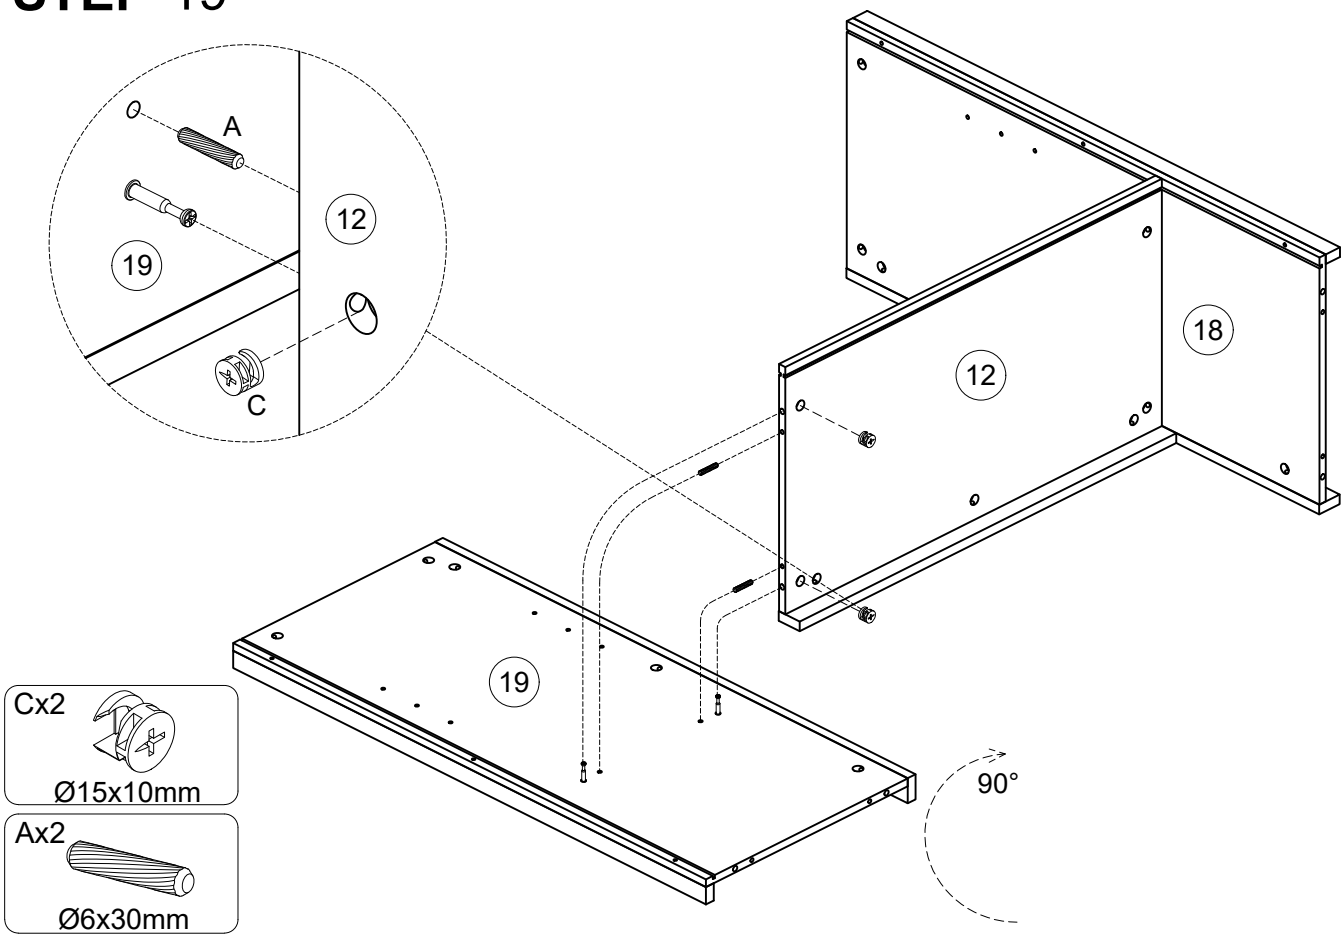Ø6x30mm

STEP 19




Cx2


Ø15x10mm

Ax2

Ø6x30mm

STEP 20

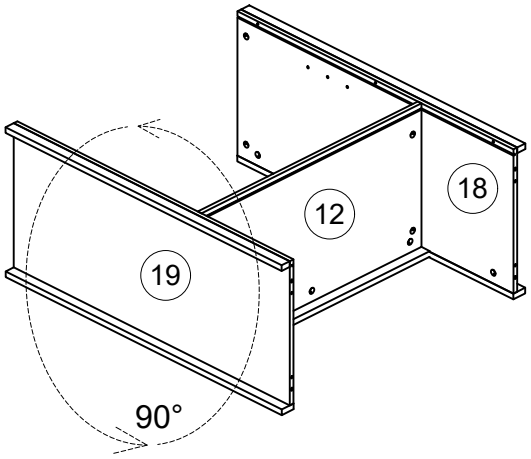


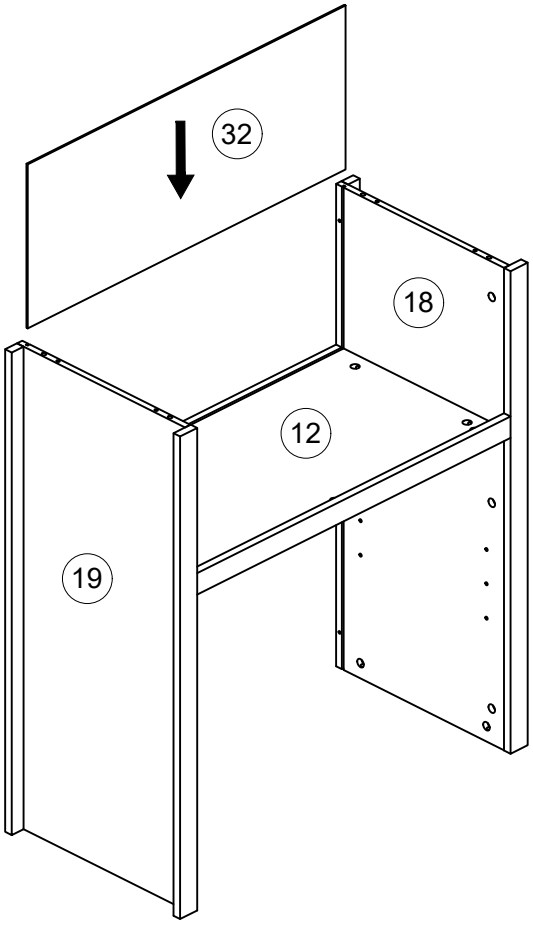

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

INSTALLATION INSTRUCTION


STEP 21

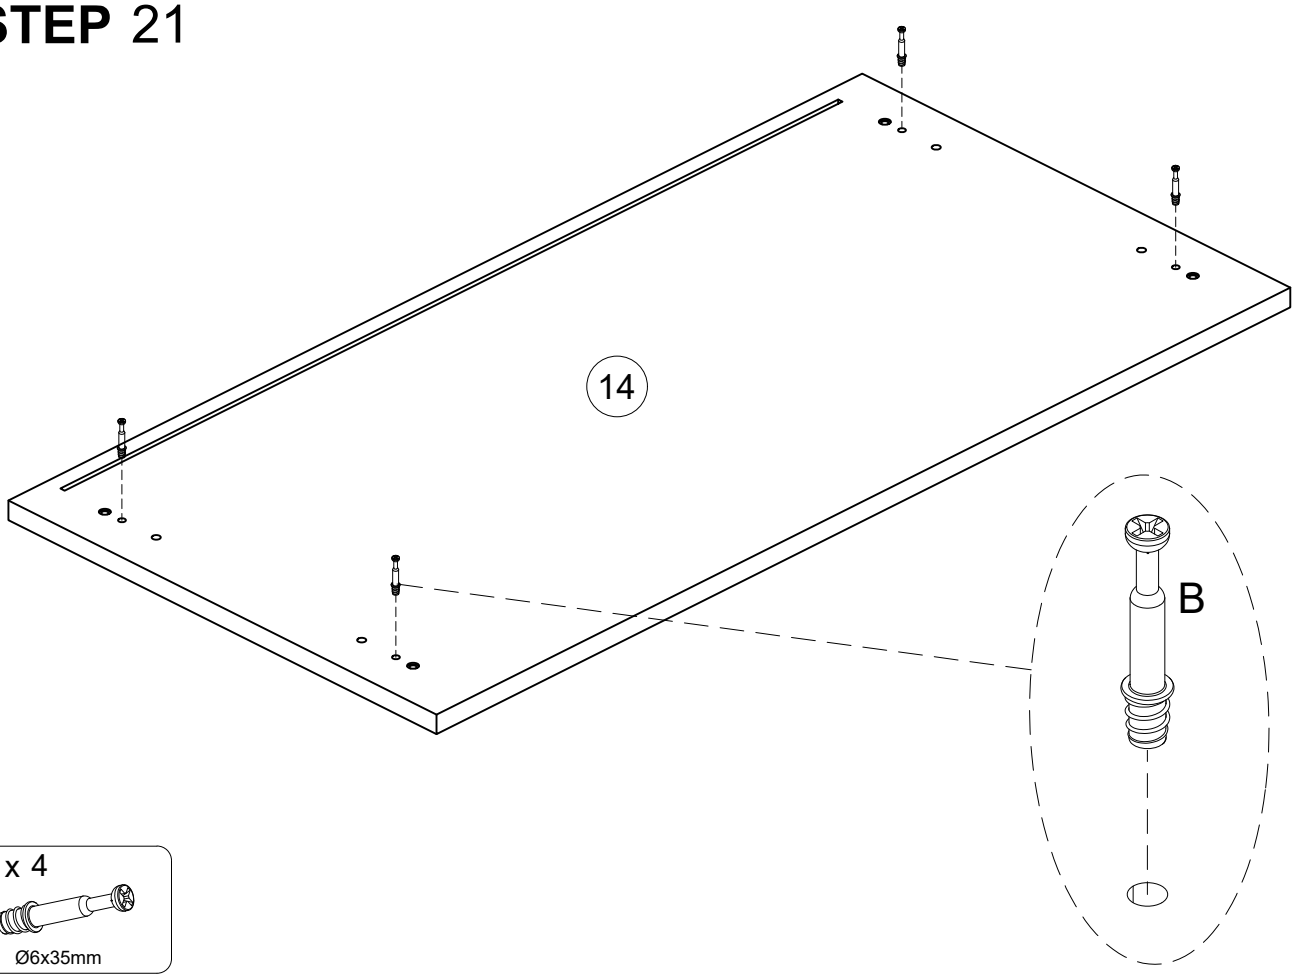

B x 4

Ø6x35mm

STEP 22

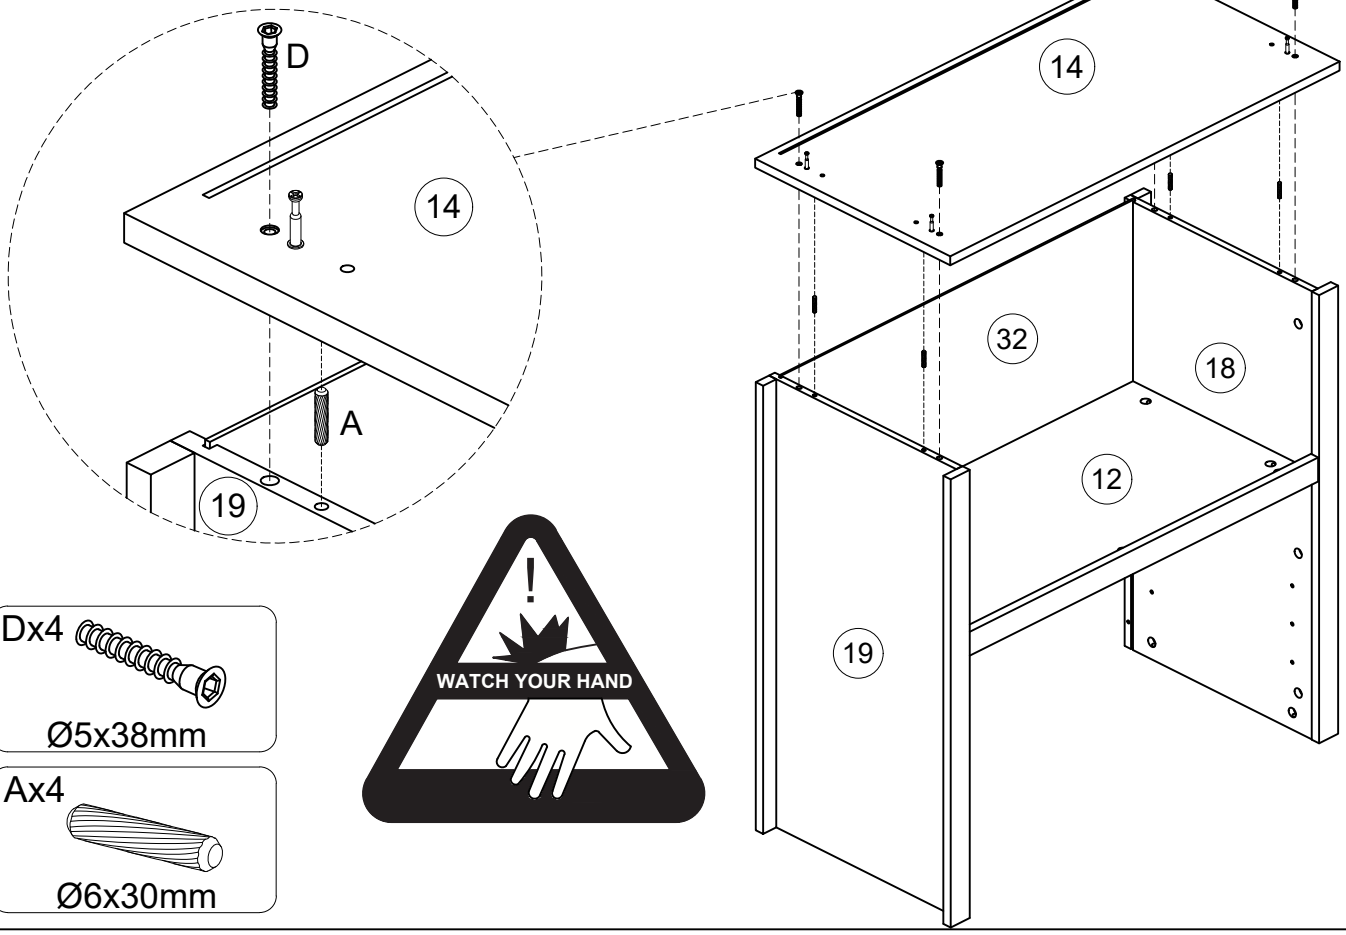

Dx4


Ø5x38mm

Ax4

Ø6x30mm

STEP 23

This installation step takes two people to complete

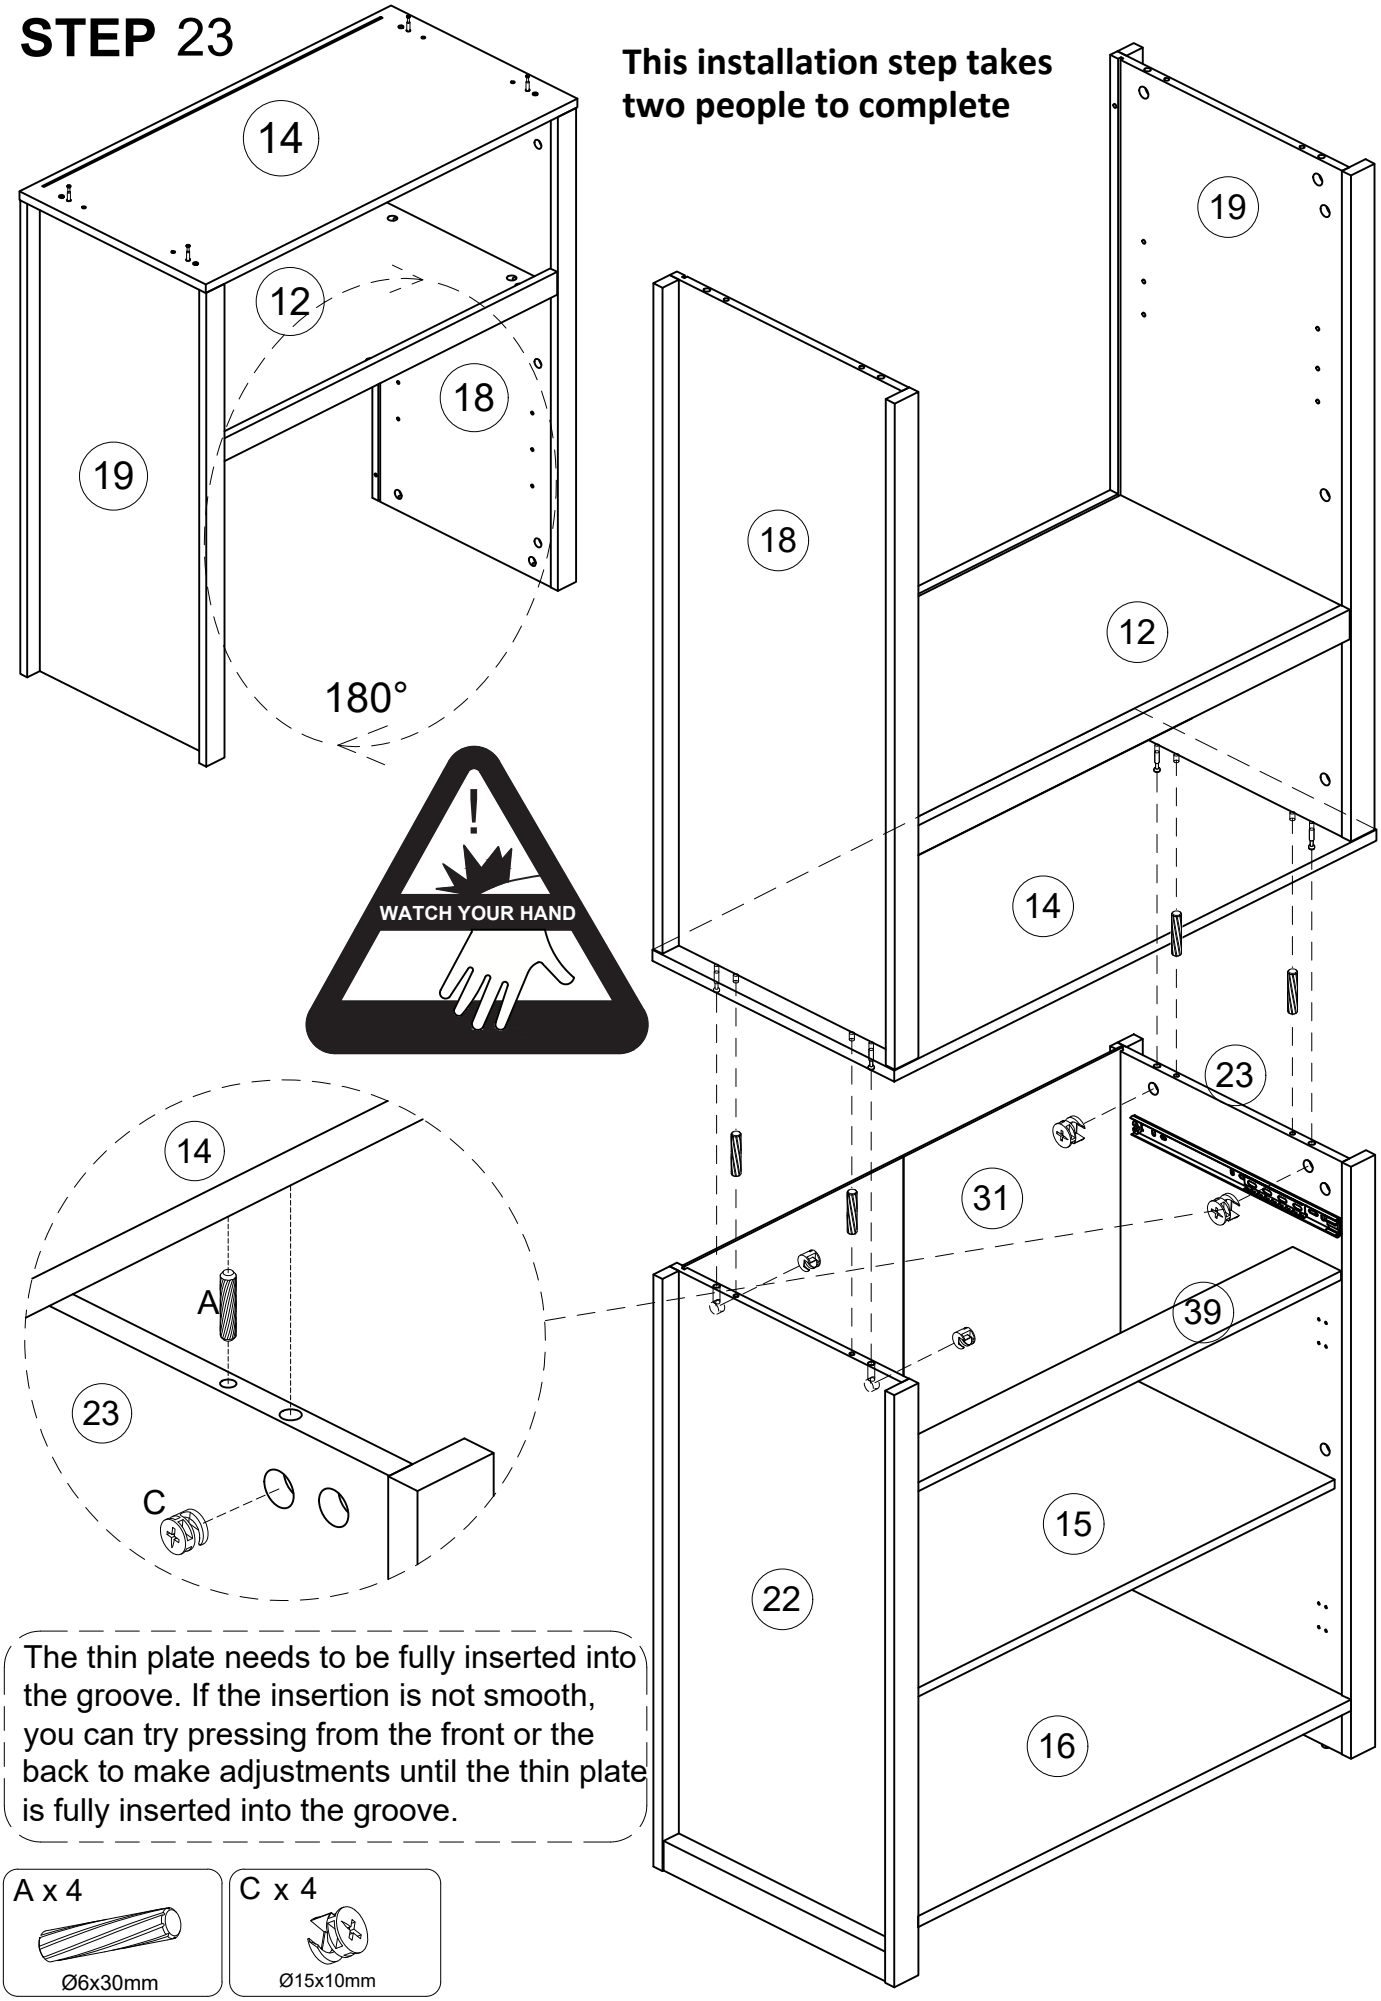

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

A x 4


Ø6x30mm

C x 4


Ø15x10mm

STEP 24


The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

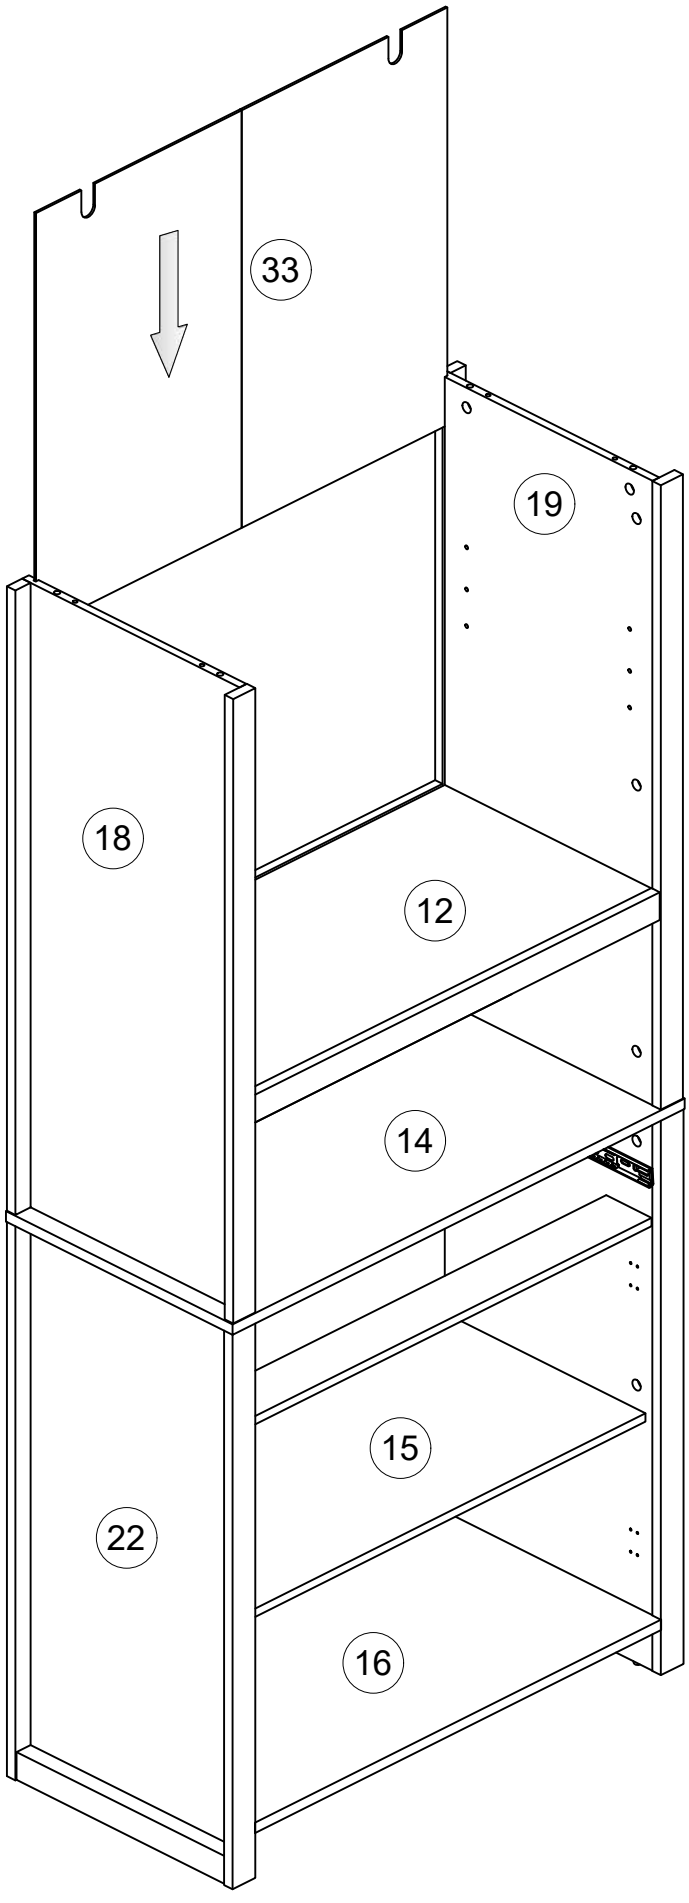

STEP 25

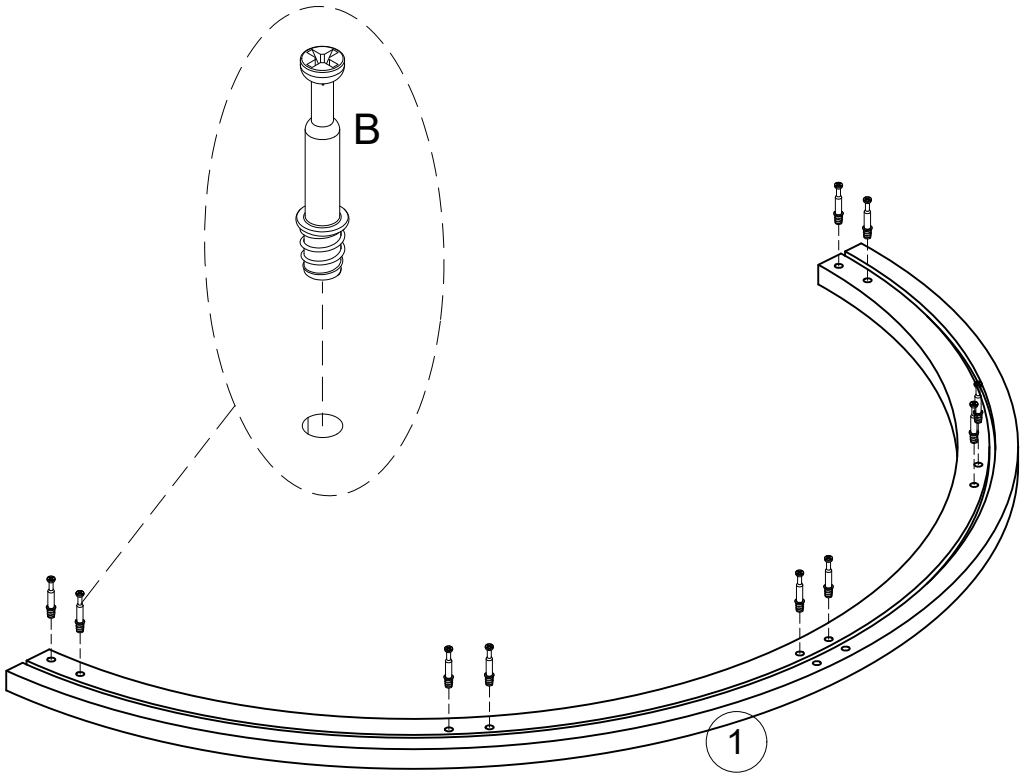


B x 10



Ø6x35mm

STEP 26

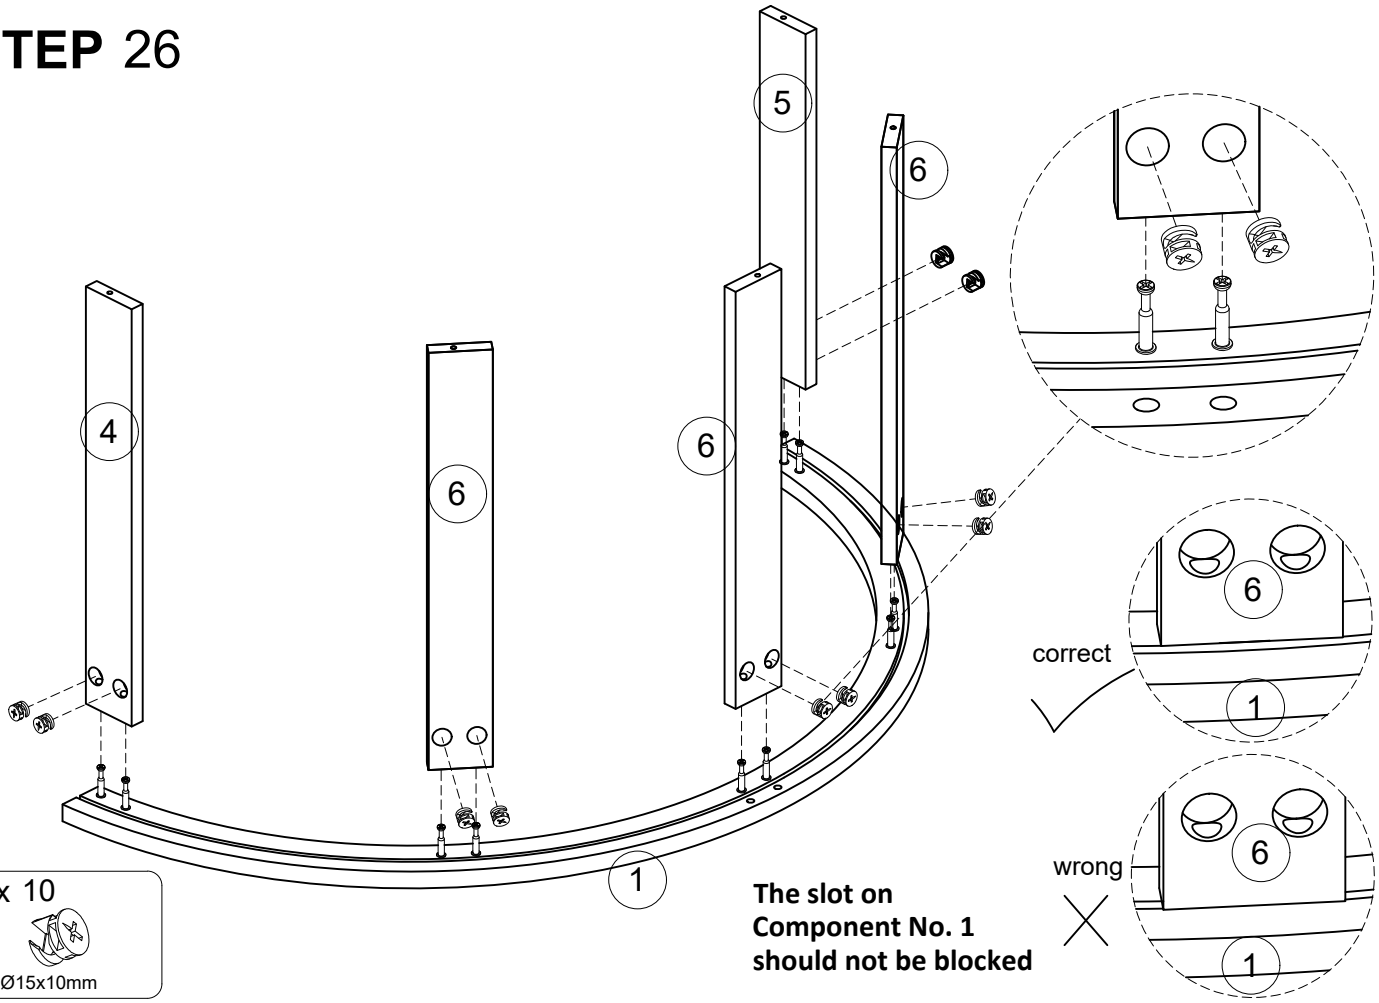


C x 10

Ø15x10mm

INSTALLATION INSTRUCTION


STEP 27

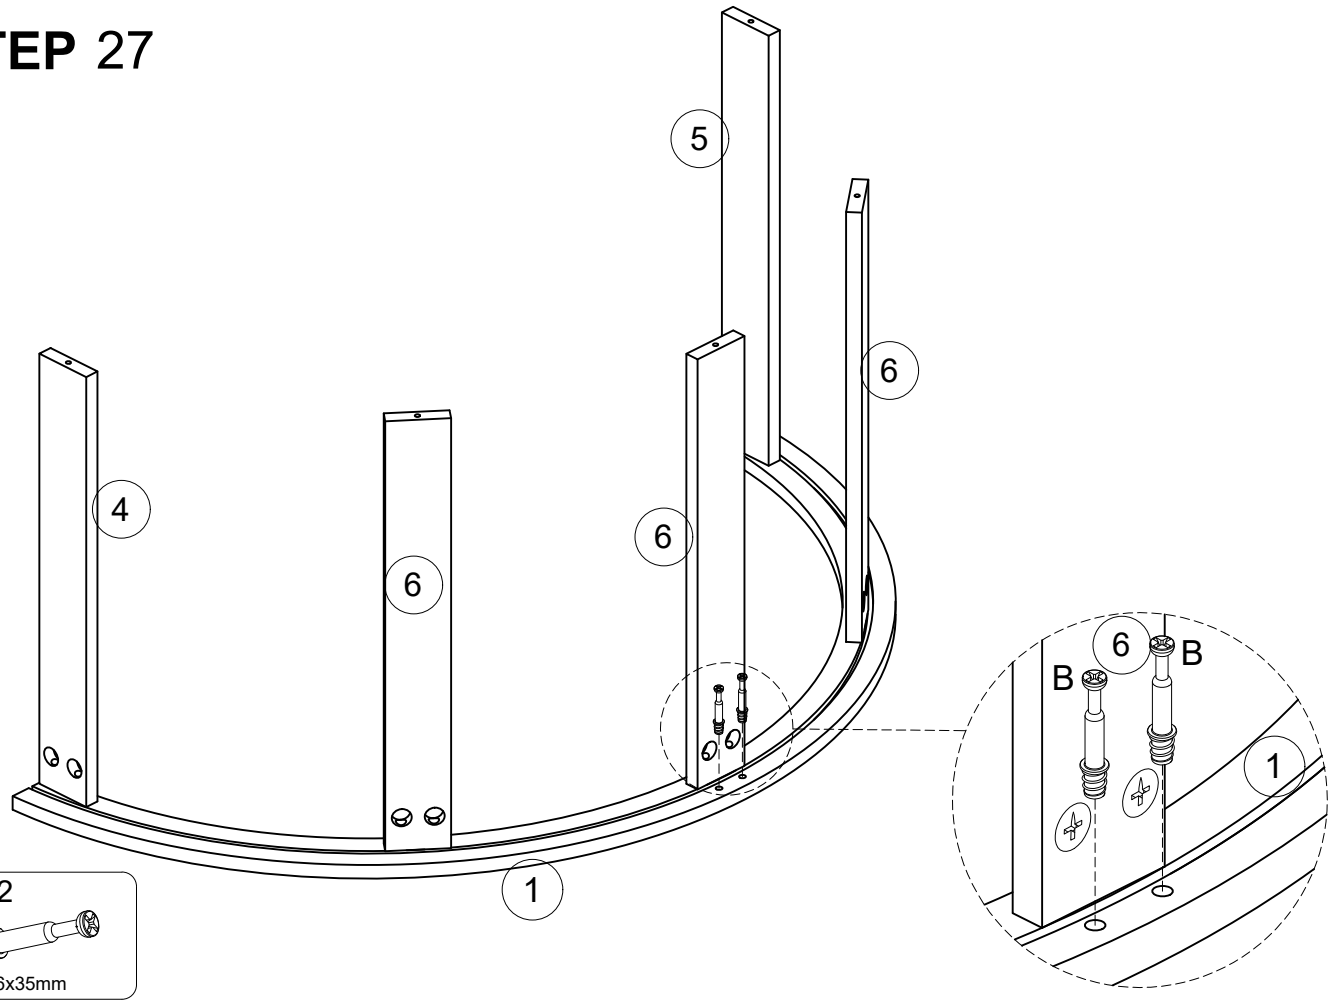

B x 2

Ø6x35mm

STEP 28

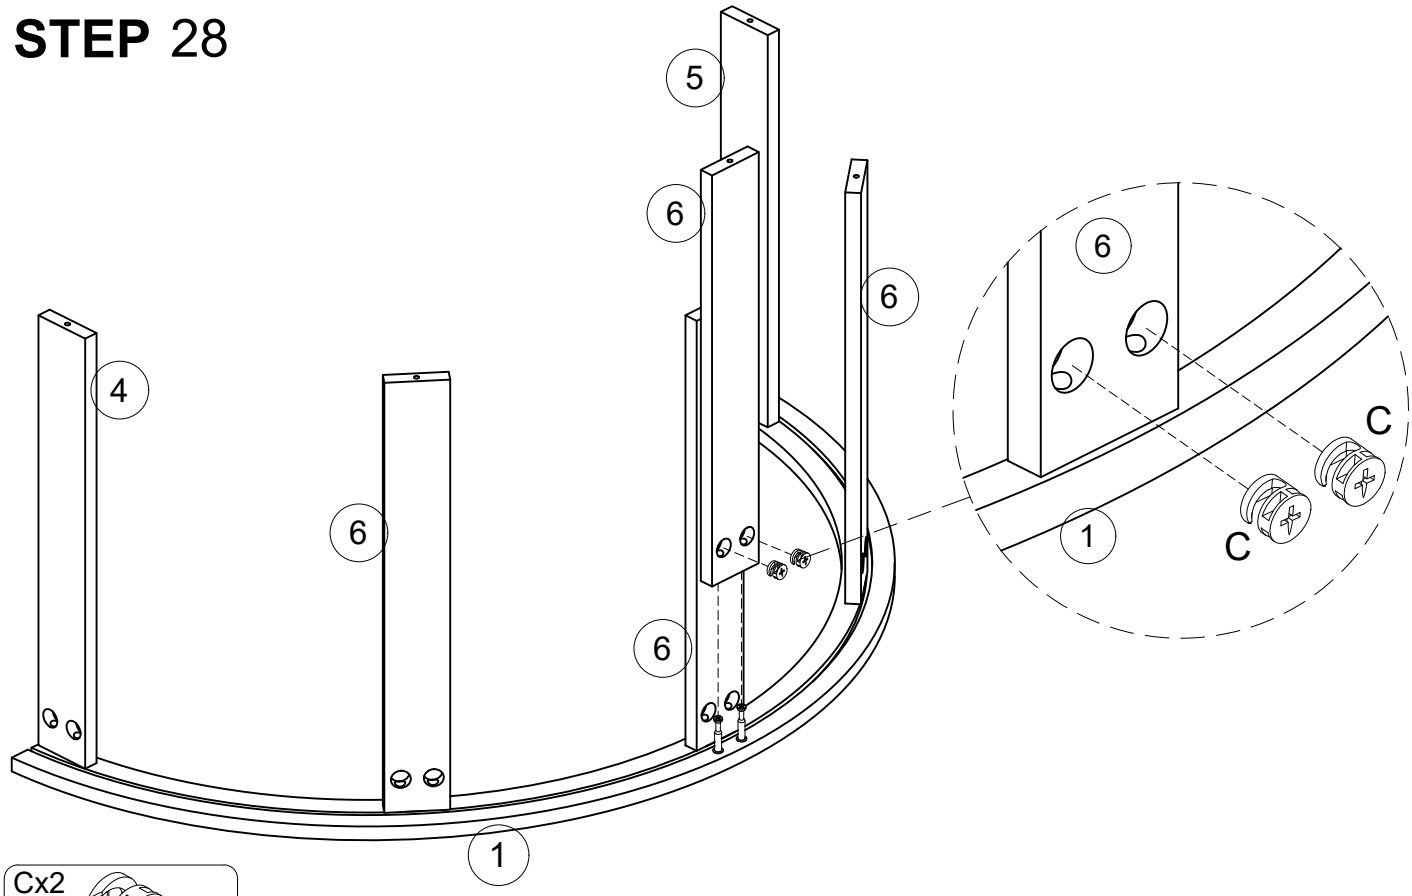


Cx2




Ø15x10mm


INSTALLATION INSTRUCTION

STEP 29

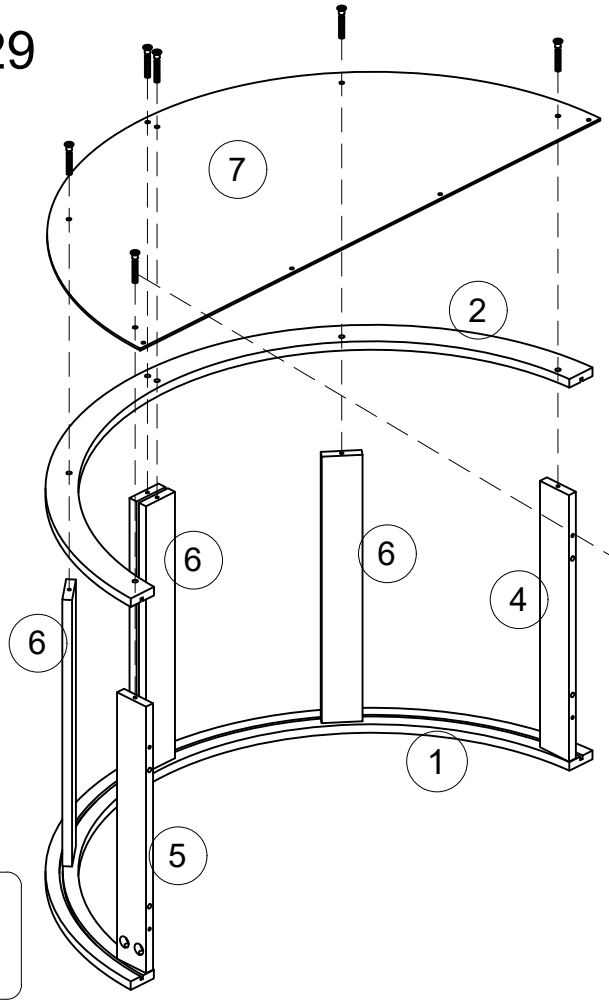


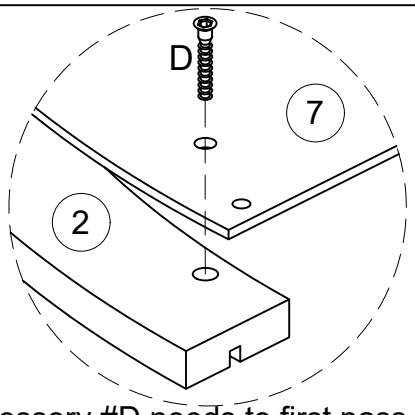

Note that accessory #D needs to first pass through components 7 and 2, then align all of it with the holes on the strip, and finally lock everything in place.

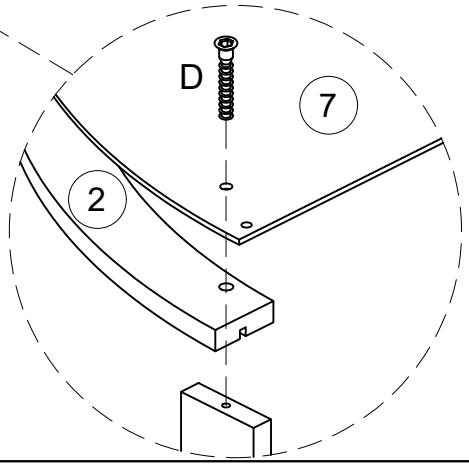


D x 6



Ø5x38mm

STEP 30

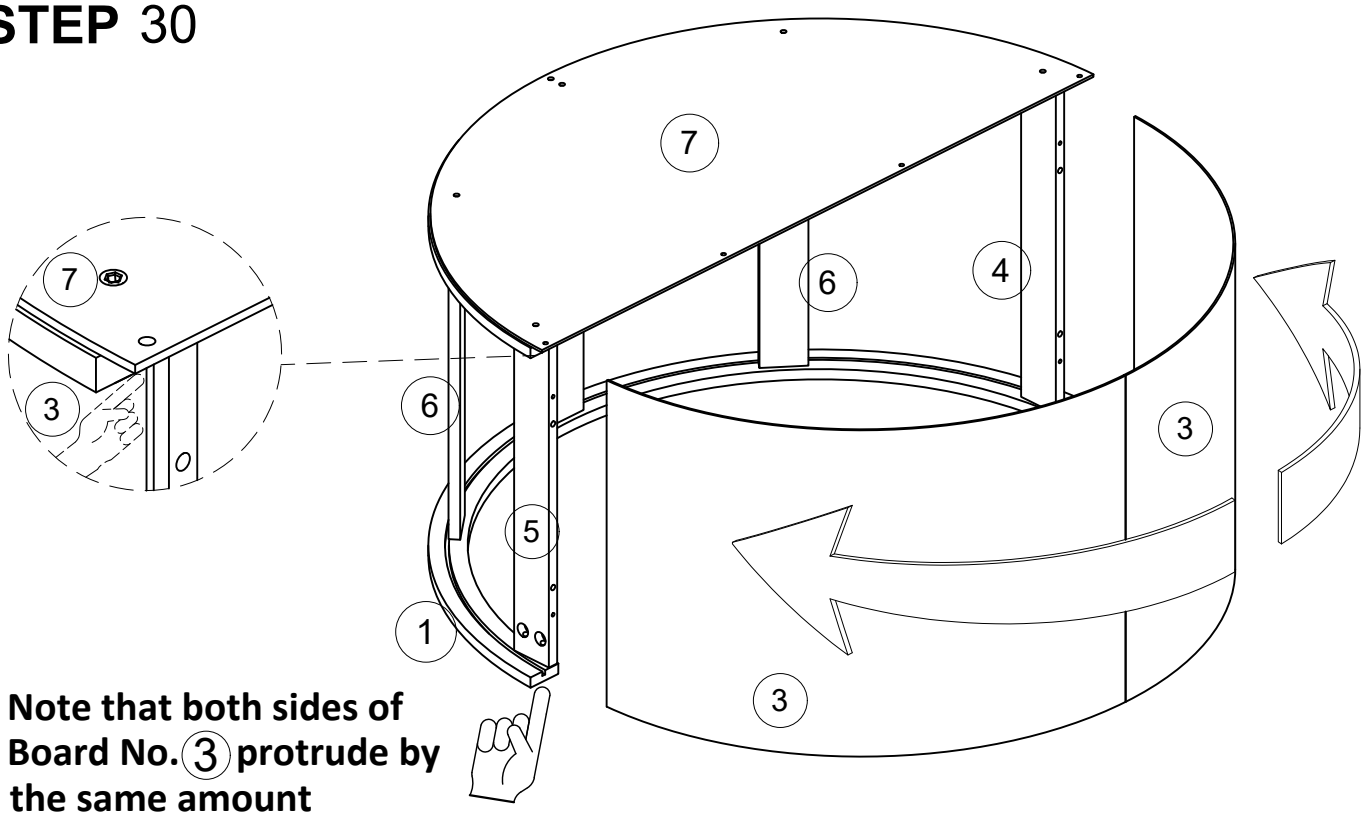


Note that both sides of Board No. 3 protrude by the same amount

Plate # 3 must not be tilted during installation.

INSTALLATION INSTRUCTION

STEP 31

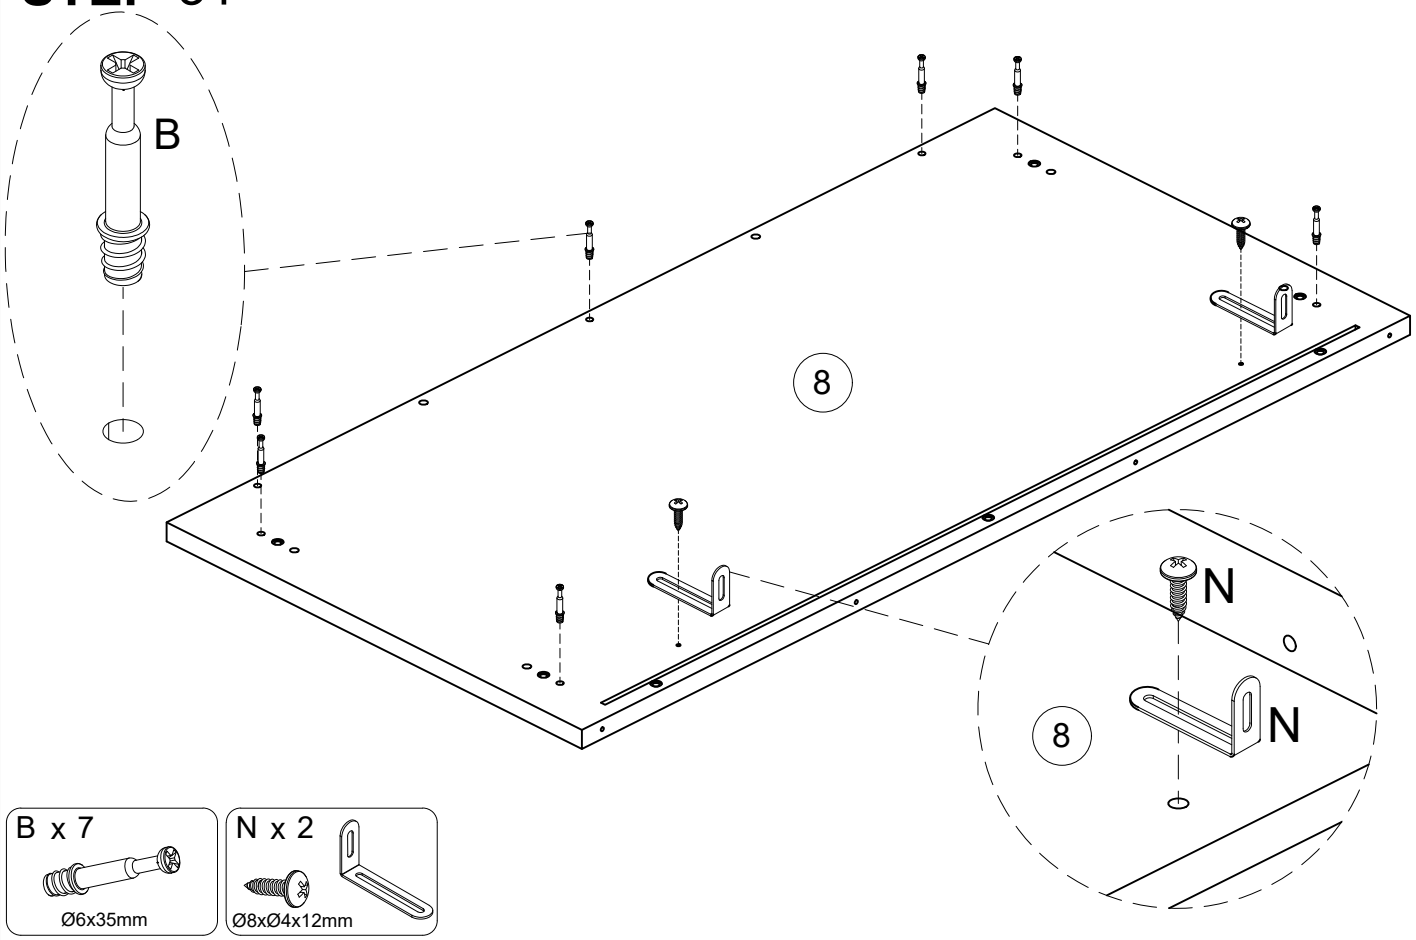


B x 7

Ø6x35mm

N x 2

Ø8xØ4x12mm

STEP 32

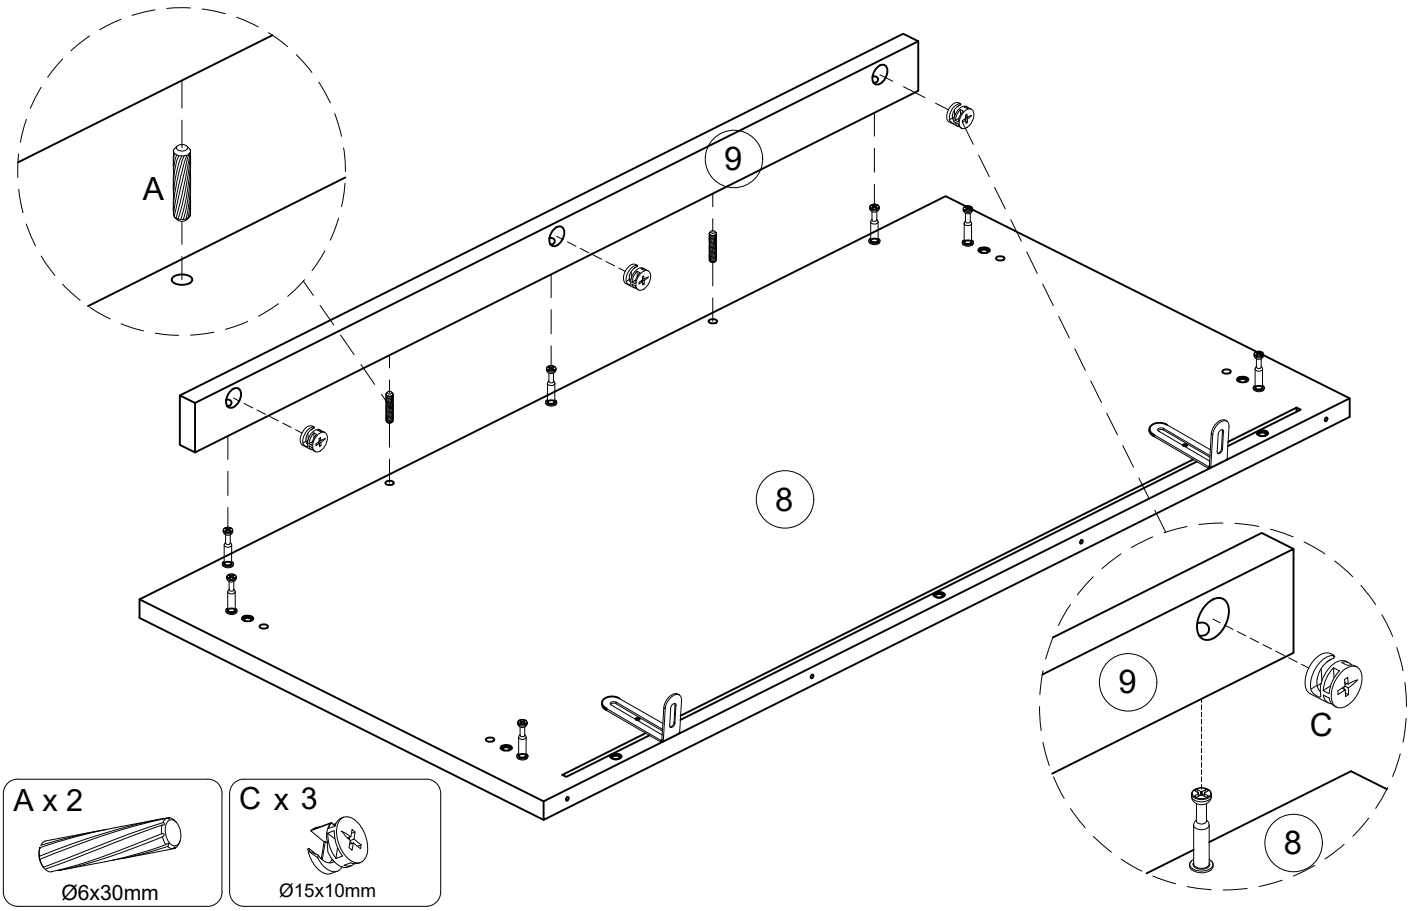


A x 2

Ø6x30mm

C x 3

Ø15x10mm

STEP 33

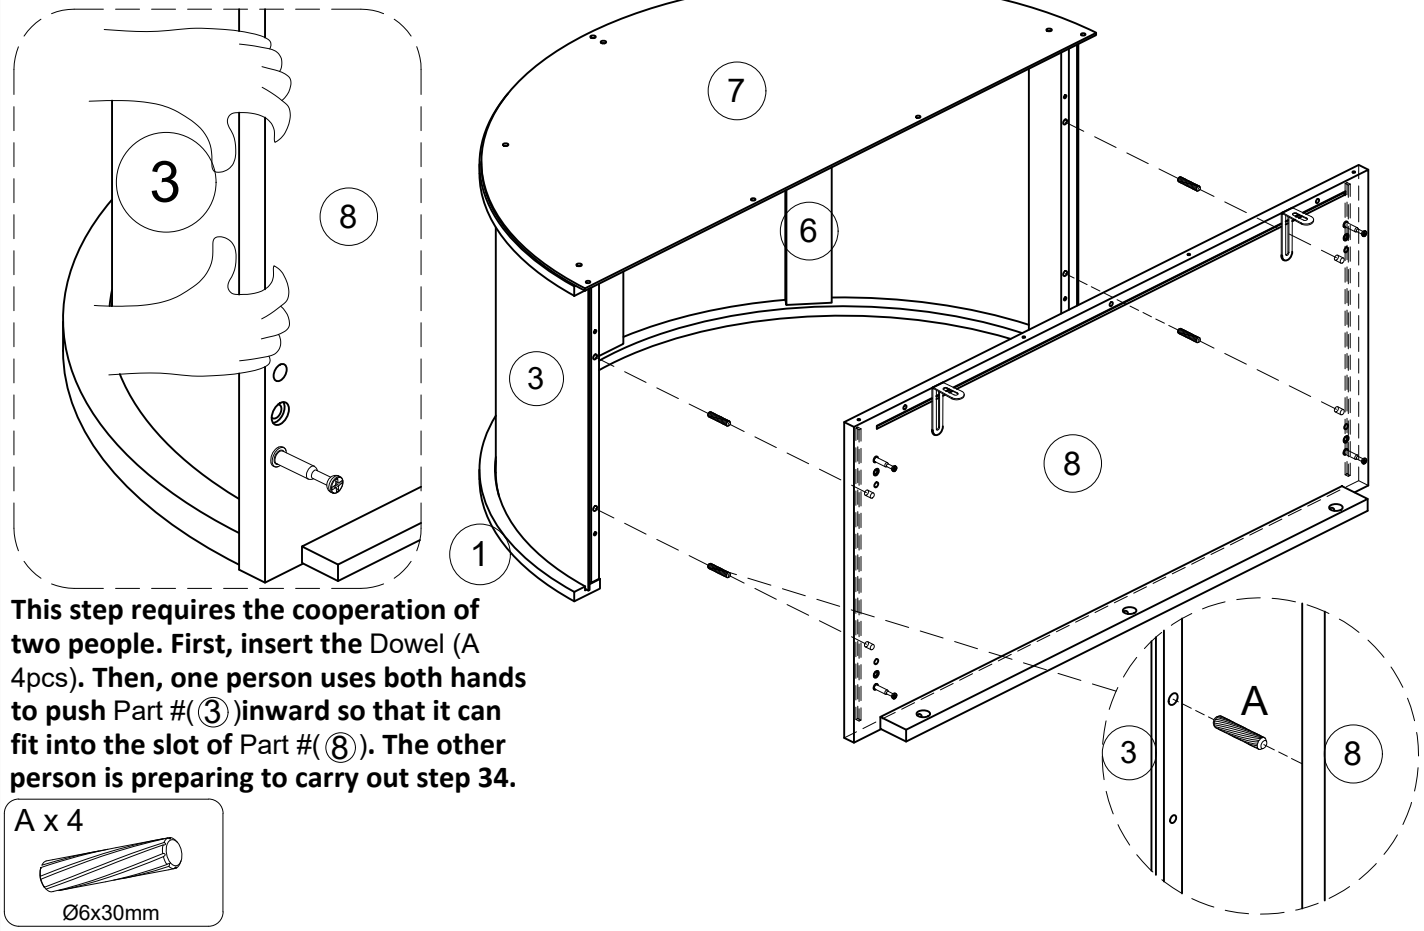


This step requires the cooperation of two people. First, insert the Dowel (A 4pcs)**. Then, one person uses both hands to push** Part #(③)**inward so that it can fit into the slot of** Part #(⑧)**. The other person is preparing to carry out step 34.**


A x 4

Ø6x30mm

STEP 34

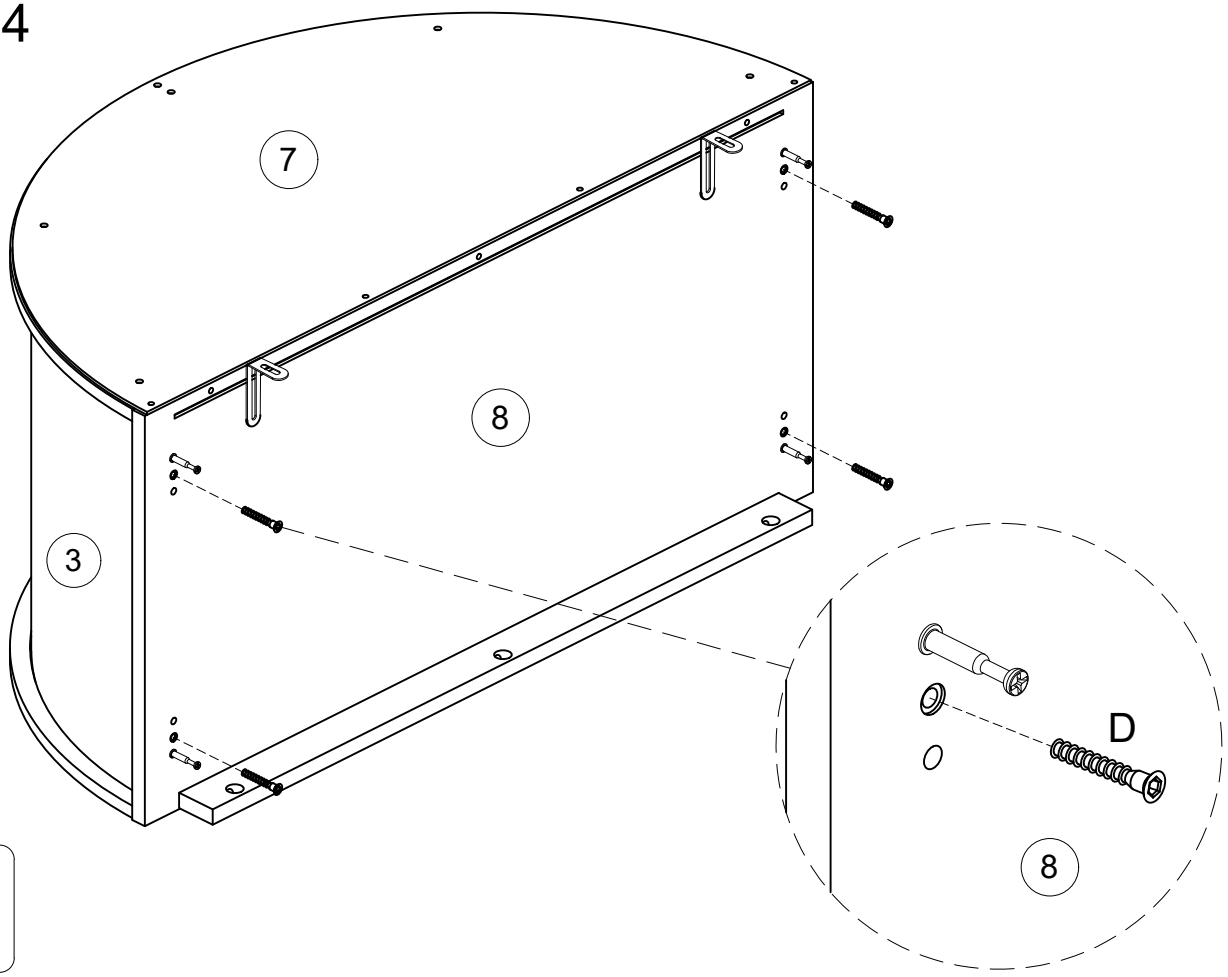


D x 4



Ø5x38mm

STEP 35

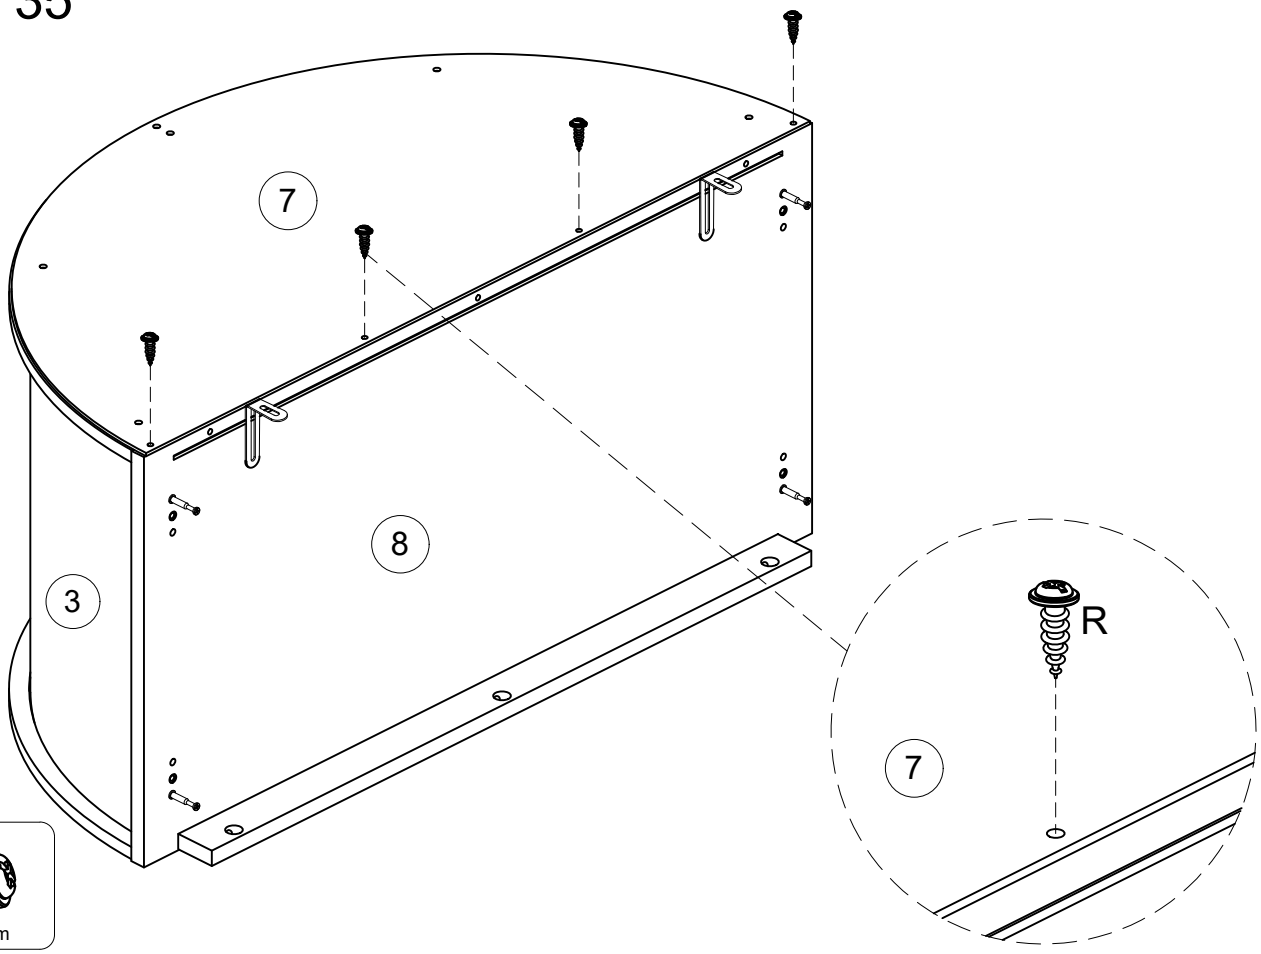


R x 4



Ø7xØ3.5x12mm

STEP 36


For this step, two people need to work together, one with both hands to push the No 3 board inward, the other person to pile the No 3 board forward, so that the No 3 board is stuck in the slot of the No 8 board

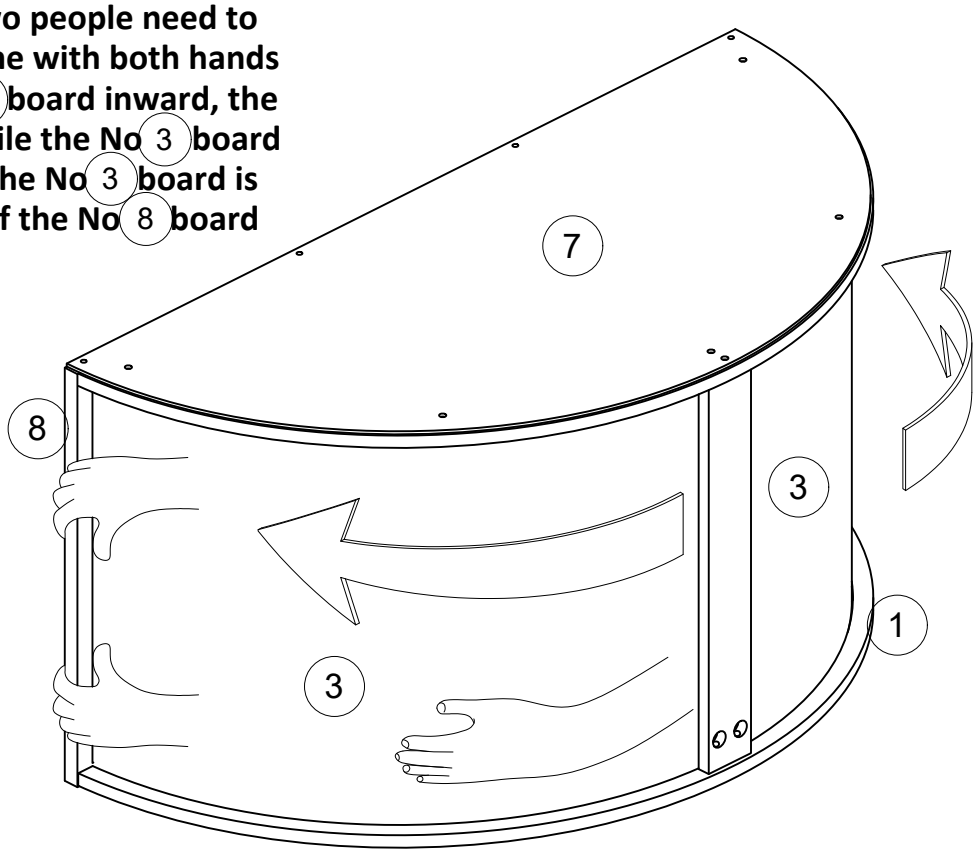


STEP 37



This installation step takes two people to complete

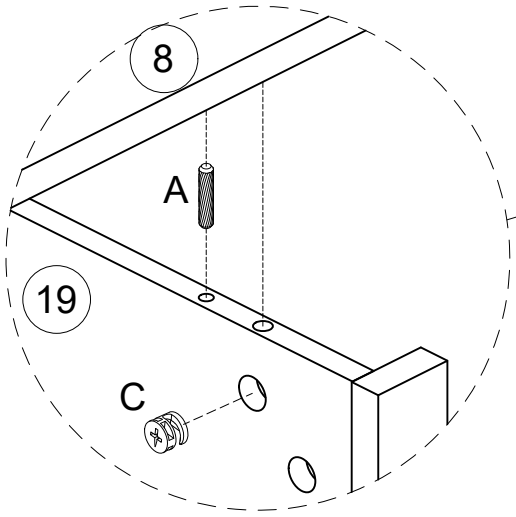

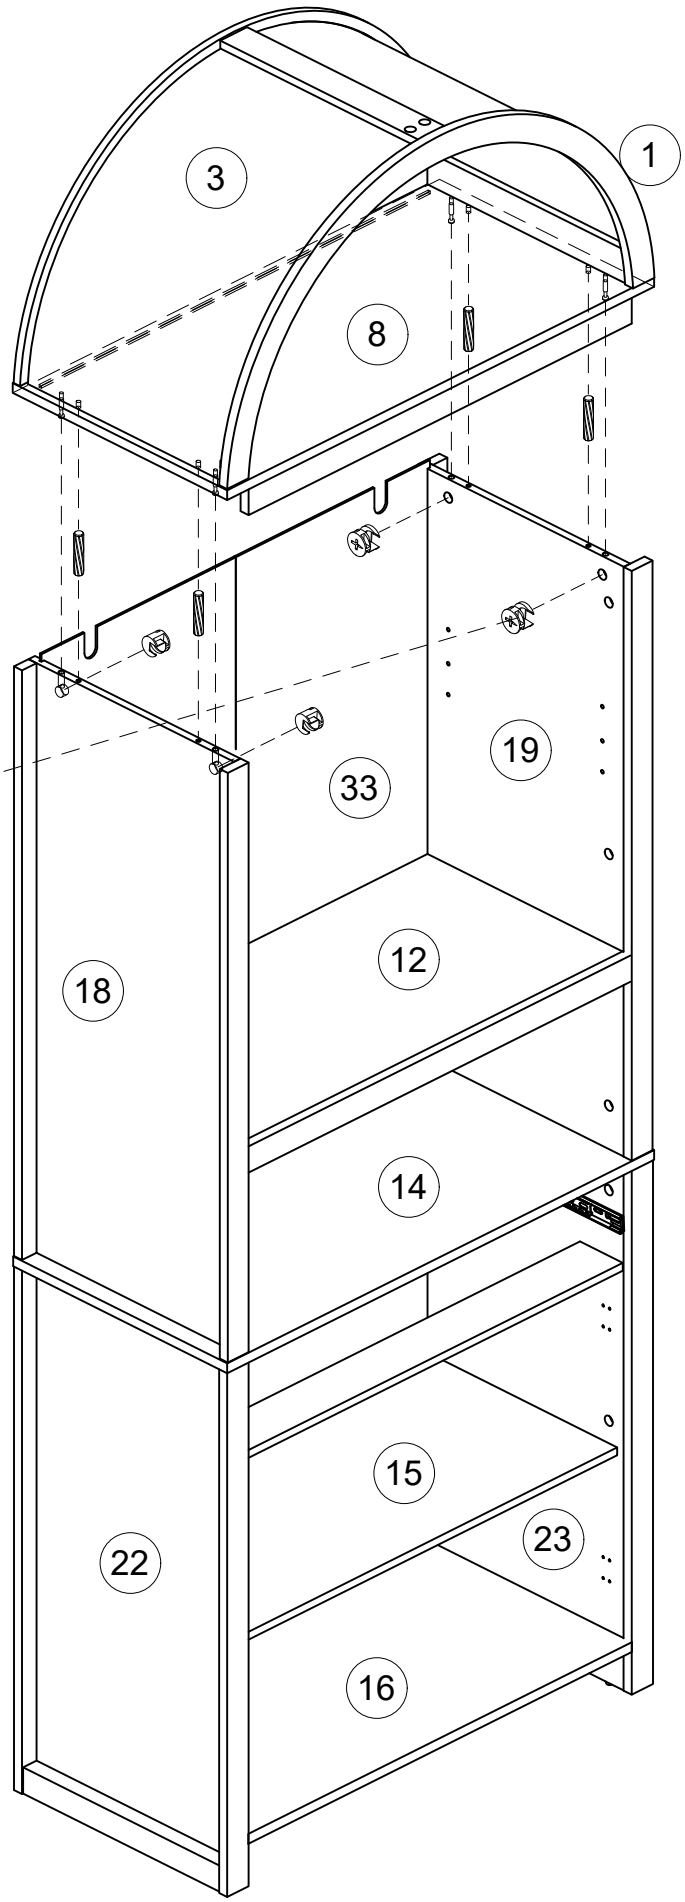

The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

A x 4




Ø6x30mm


C x 4




Ø15x10mm

STEP 38

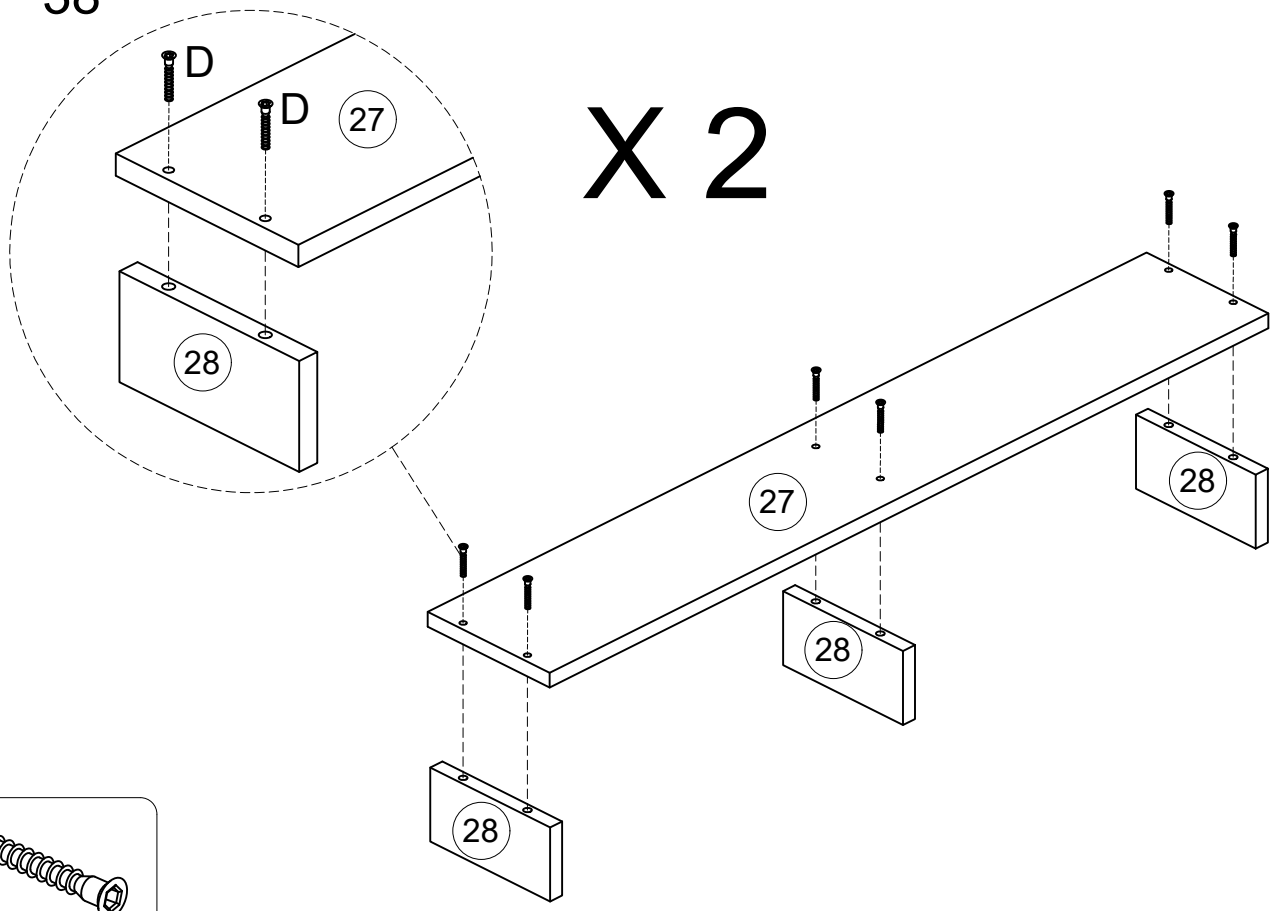






STEP 39

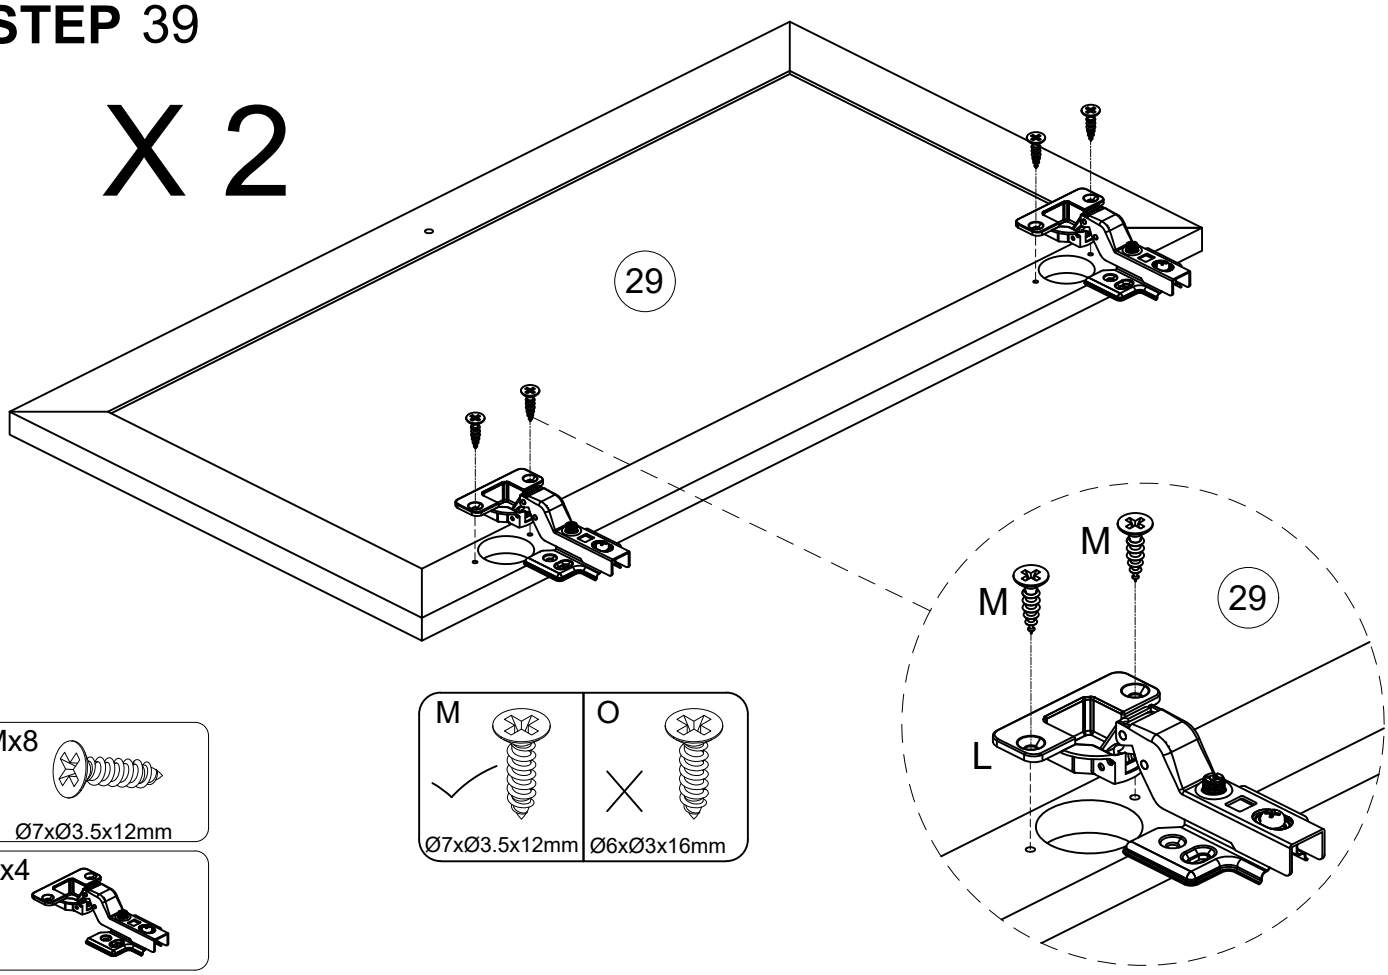



STEP 40

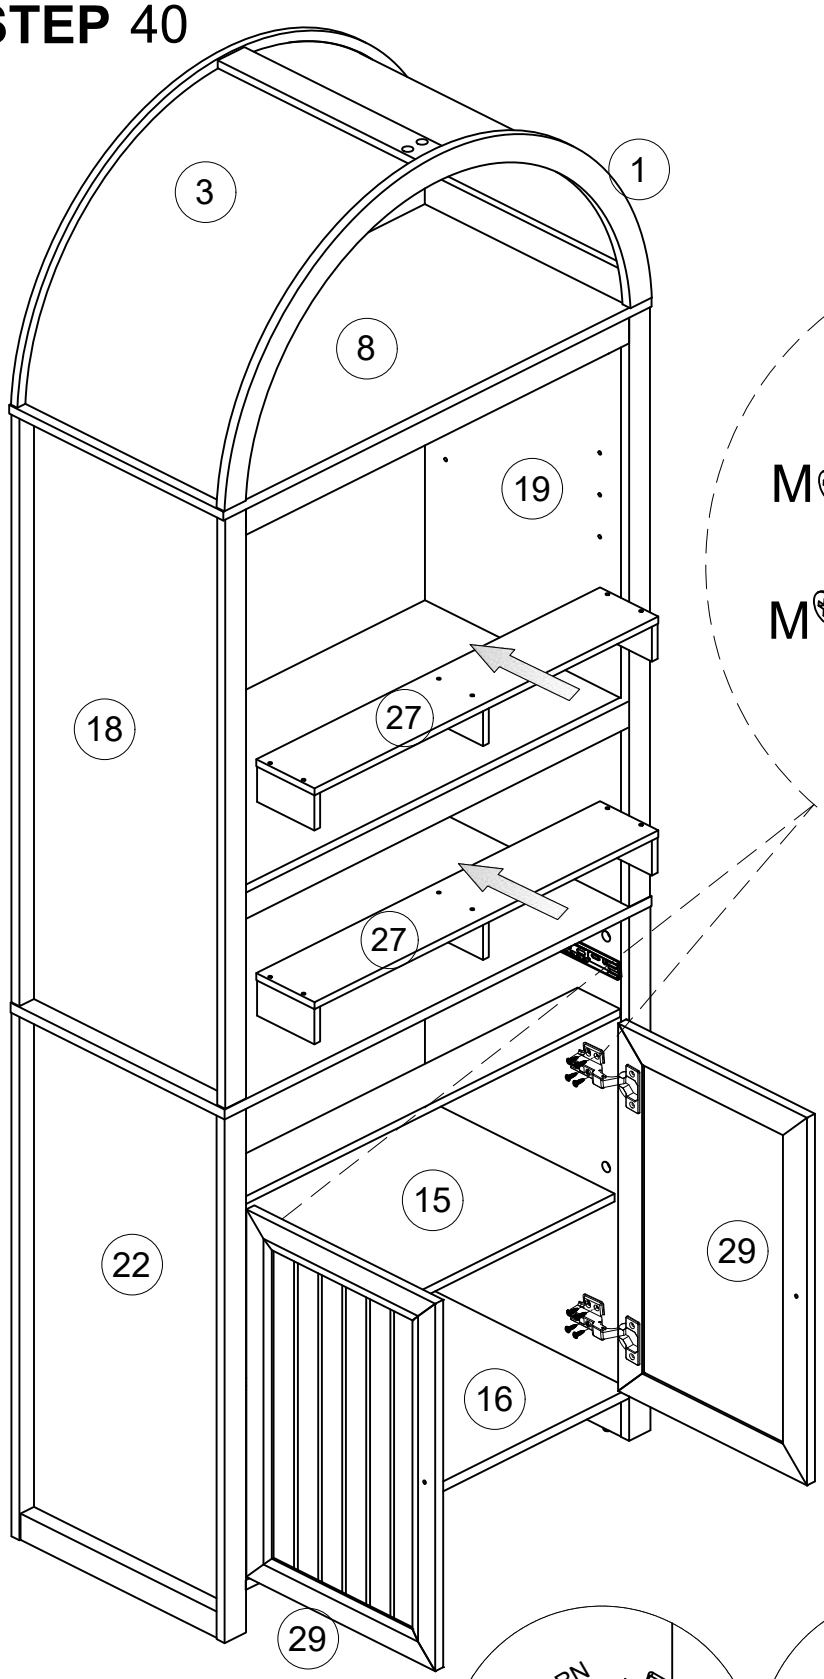

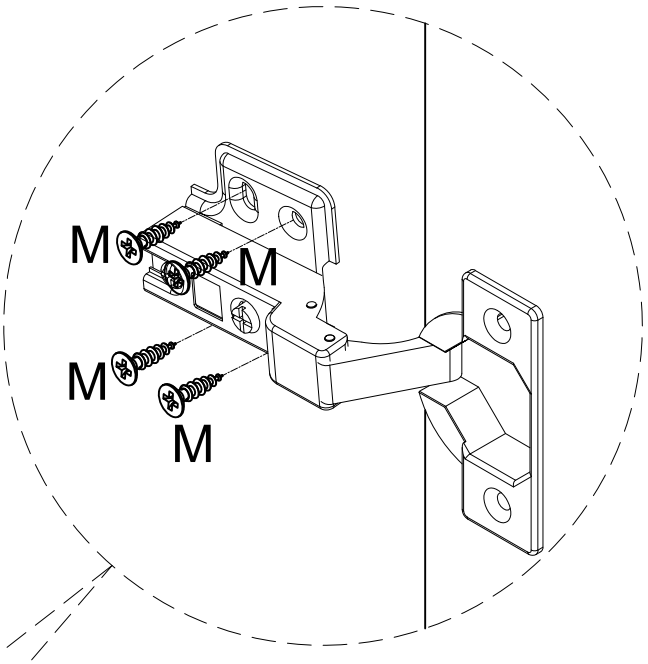









Loosen this screw and push up/down for a slight up-down adjustment of the door.




Loosen this screw for a slight left-right adjustment of the door.




Loosen this screw and push forward/backward for a slight front-back adjustment of the door.

STEP 41

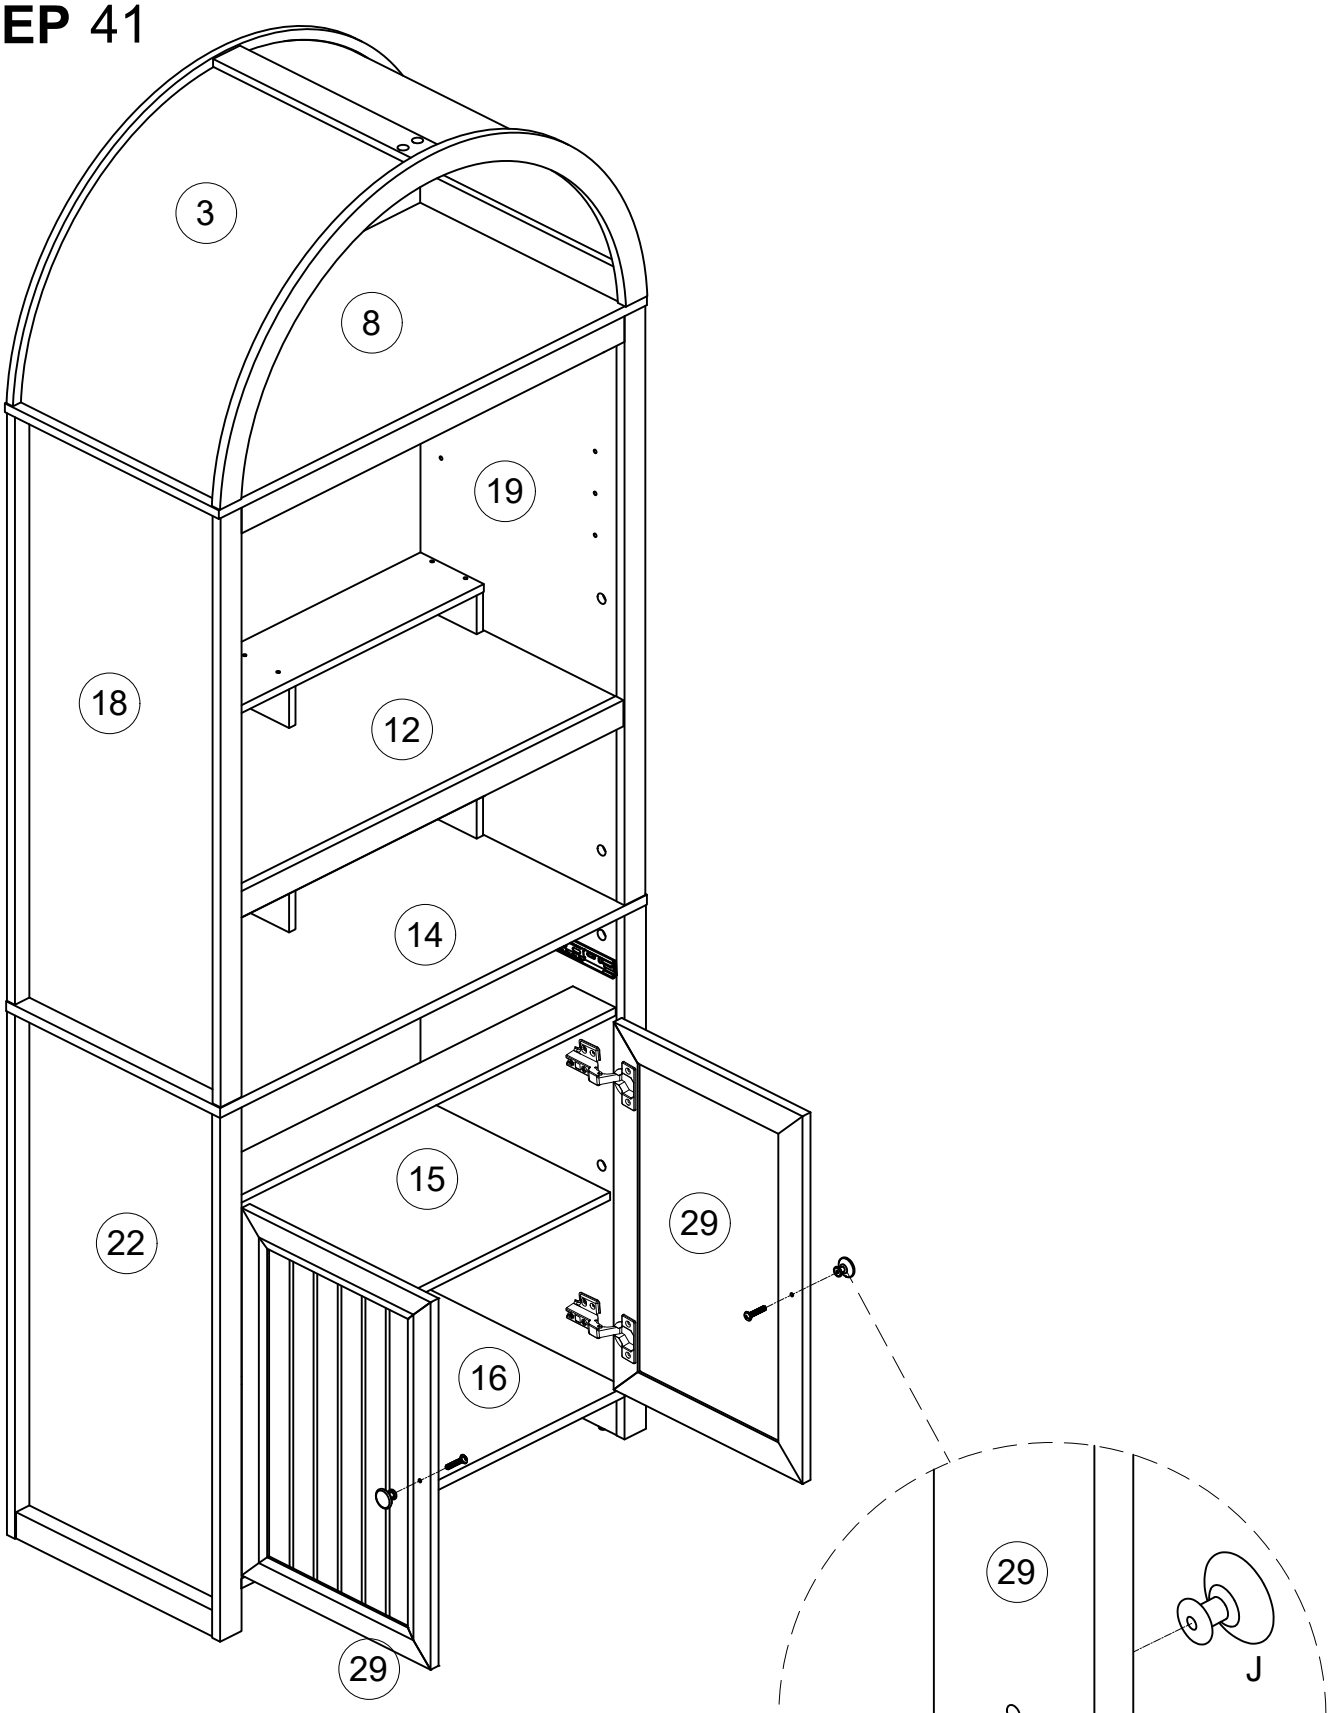

Kx2




M4x20mm


Jx2



STEP 42

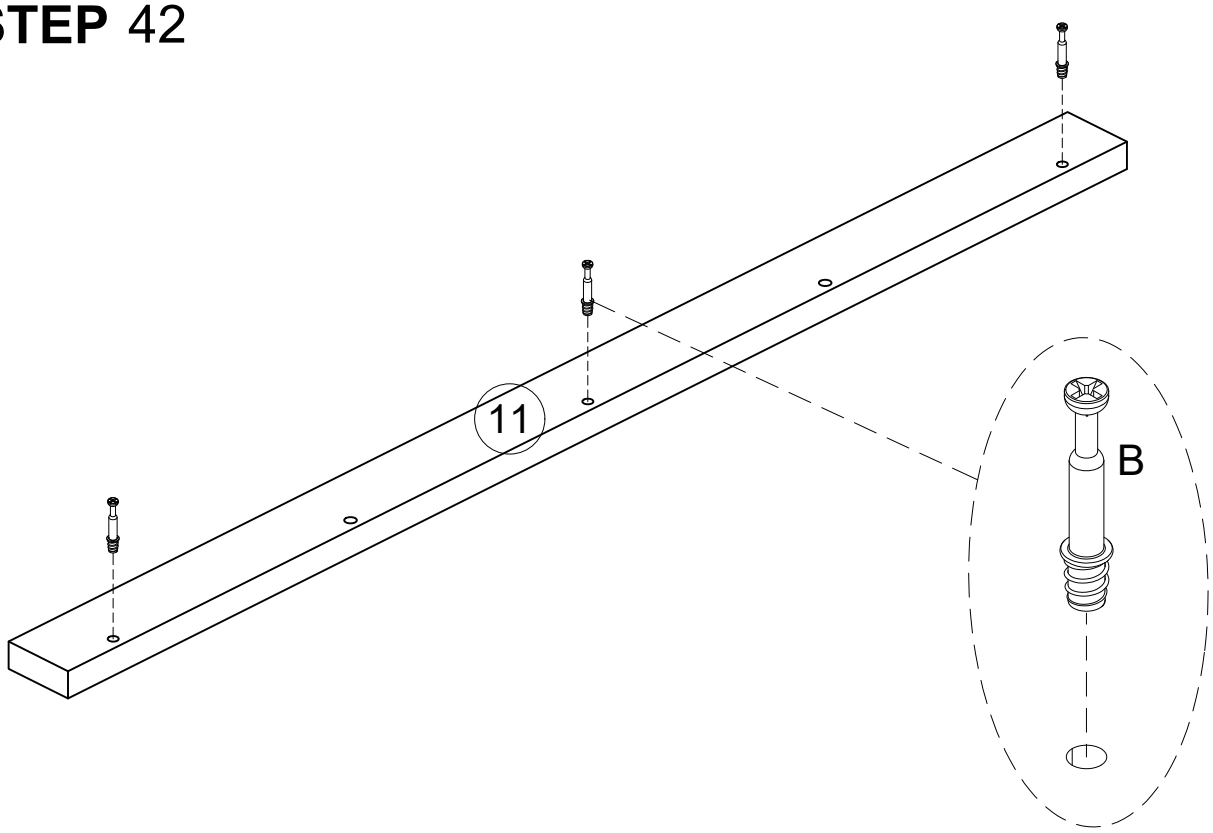


B x 3



Ø6x35mm

STEP 43

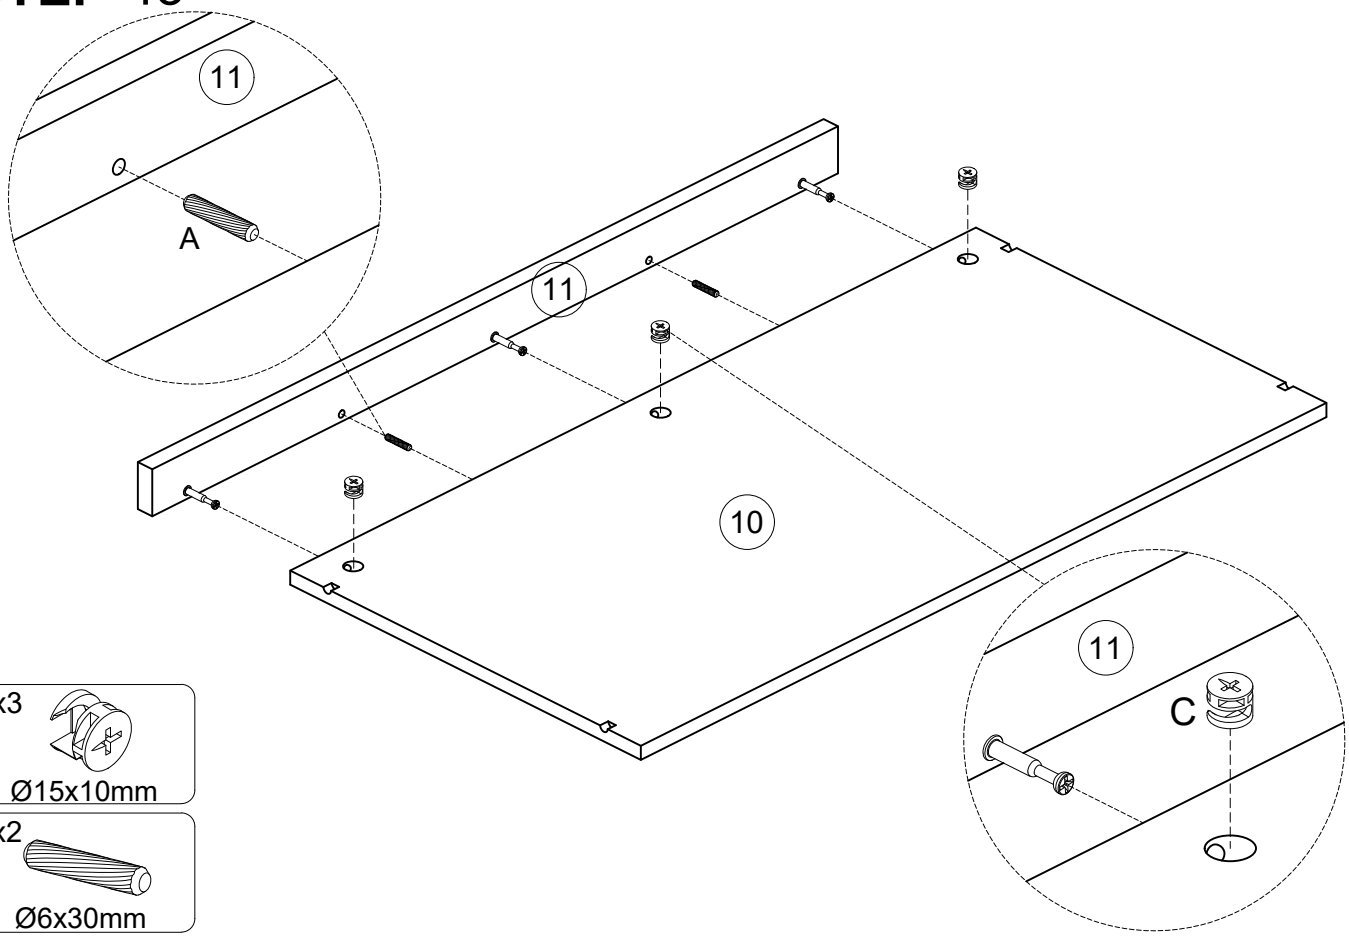


Cx3


Ø15x10mm


Ax2


Ø6x30mm


STEP 44

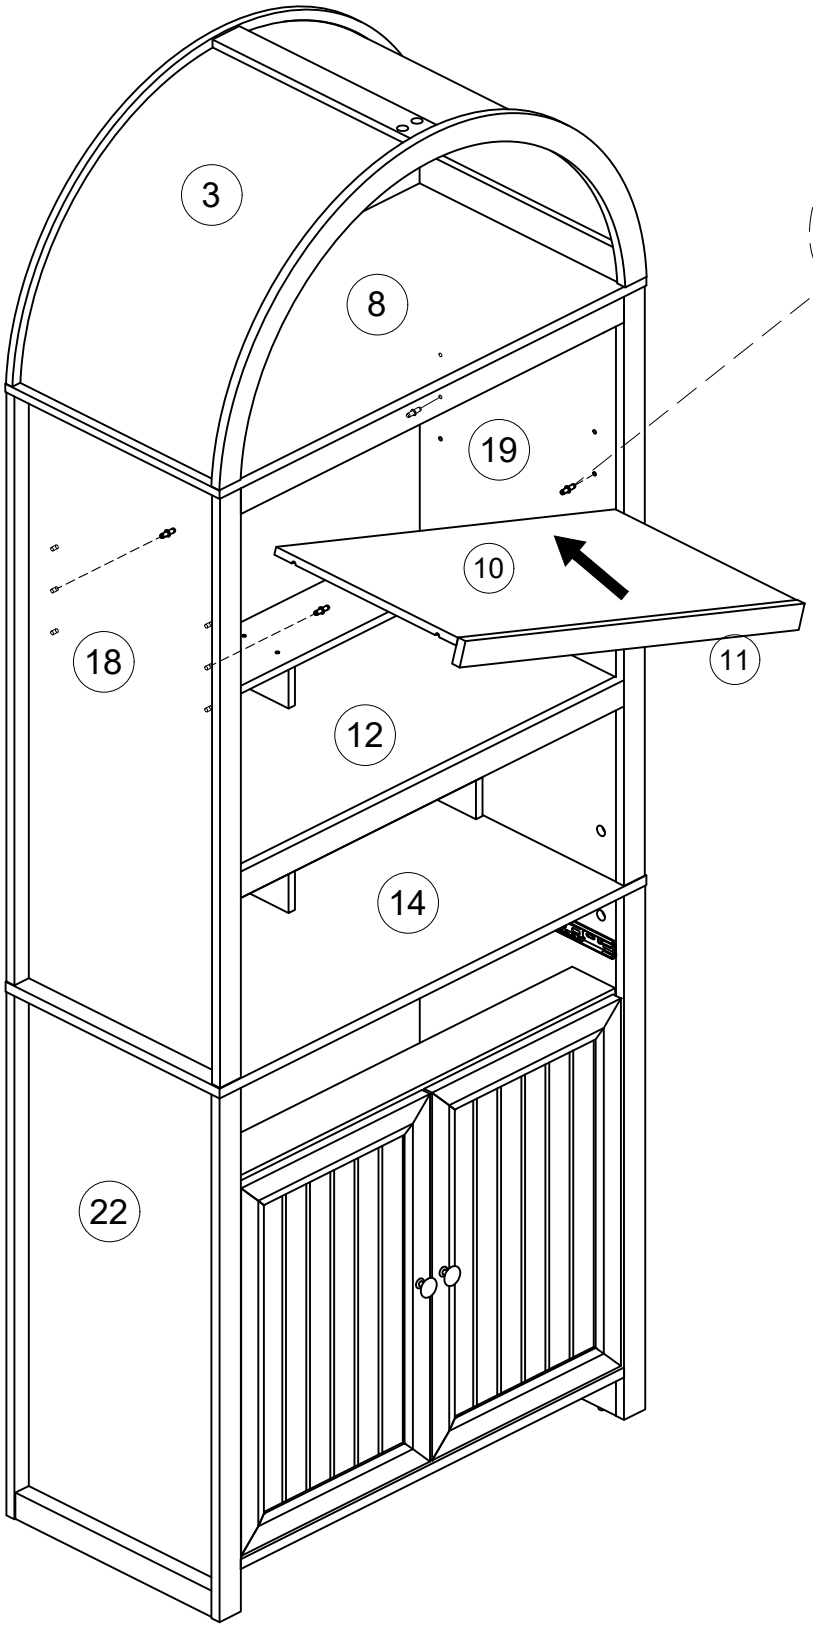

3
8
19
10
11
18
12
14
22

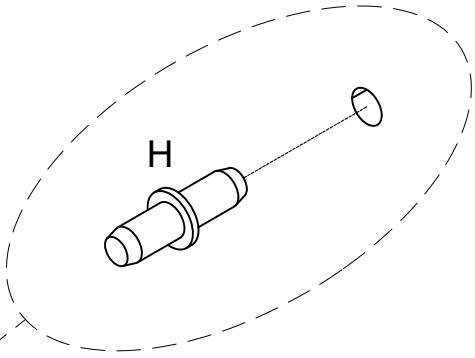
H

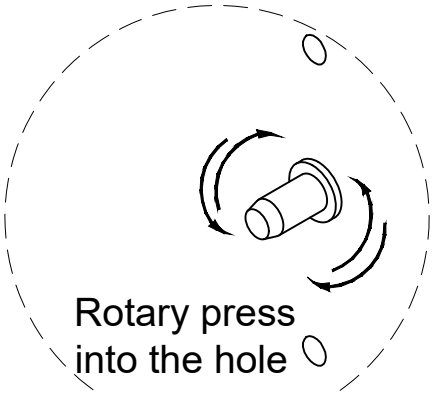

Rotary press
into the hole

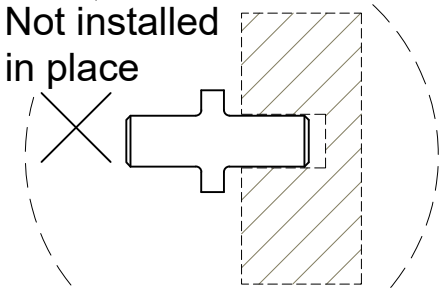
Not installed
in place

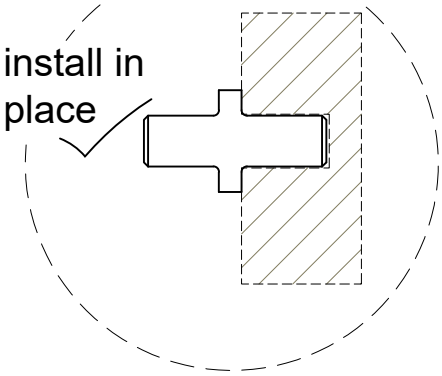
install in
place


Hx4

STEP 45

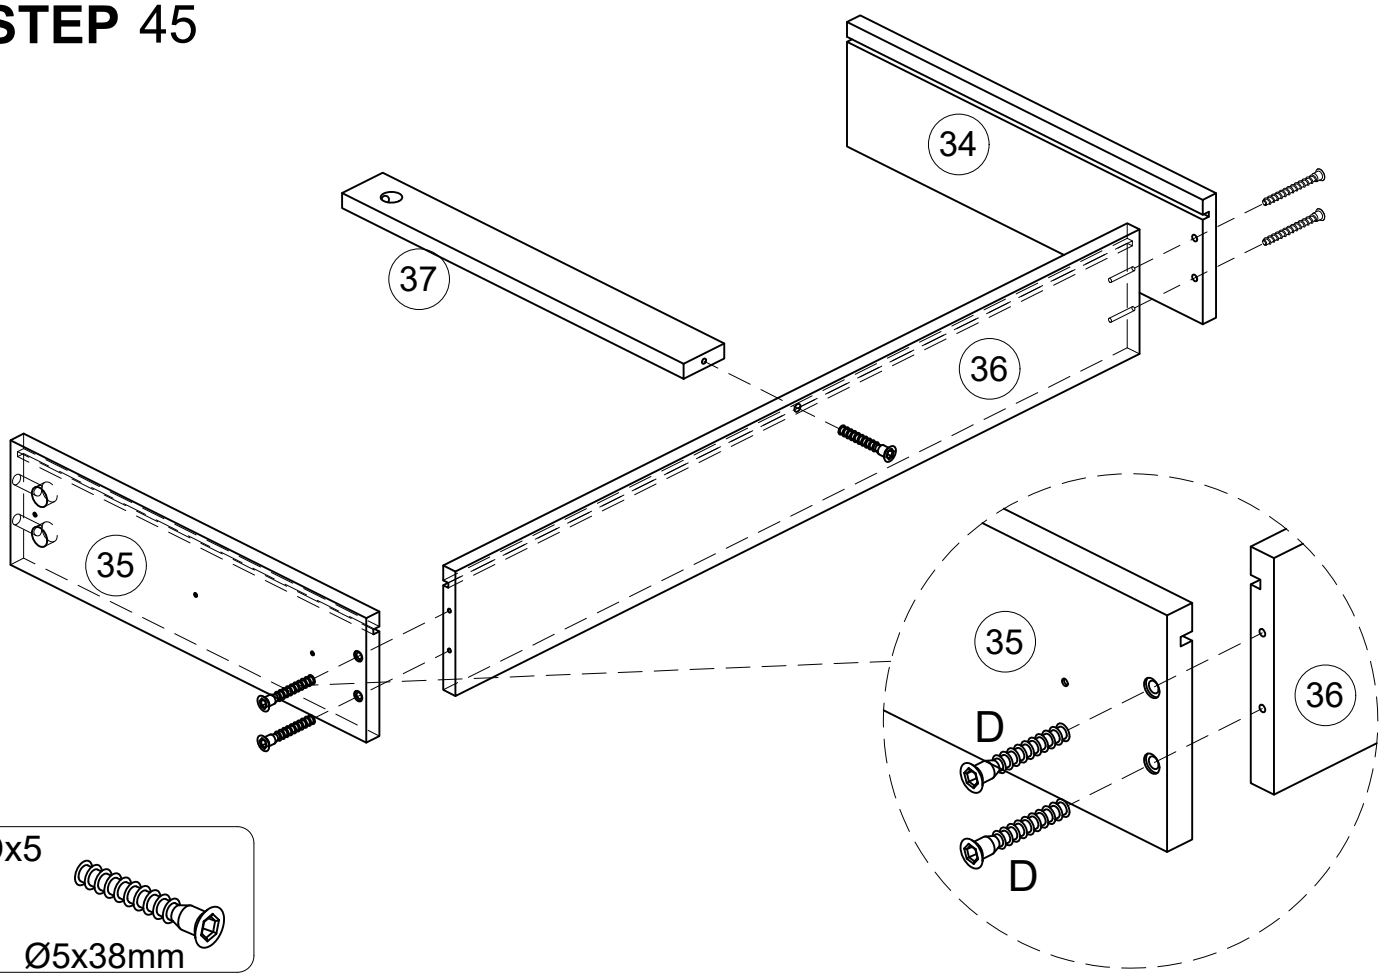


Dx5


Ø5x38mm

STEP 46


The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

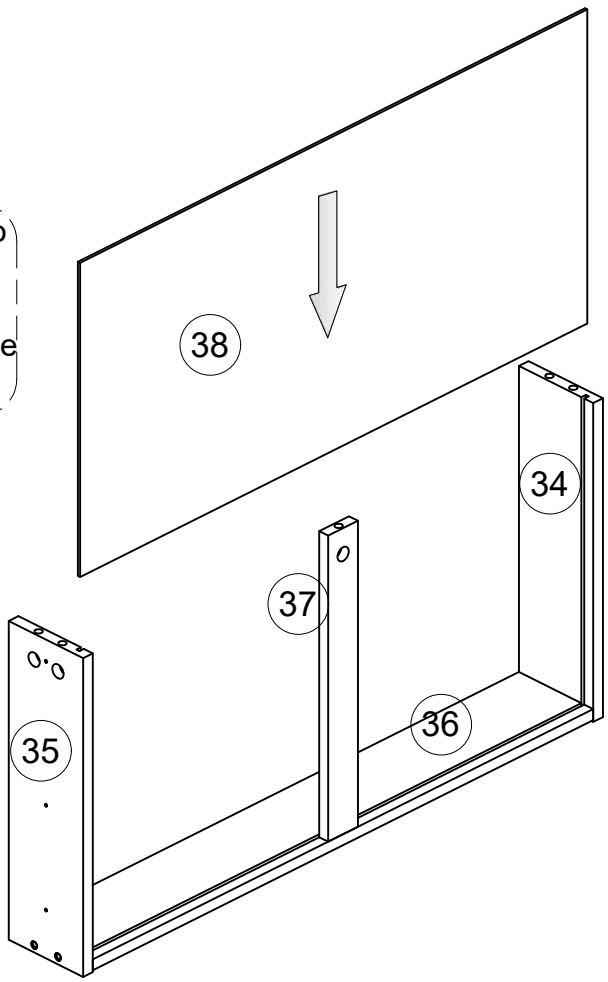

STEP 47

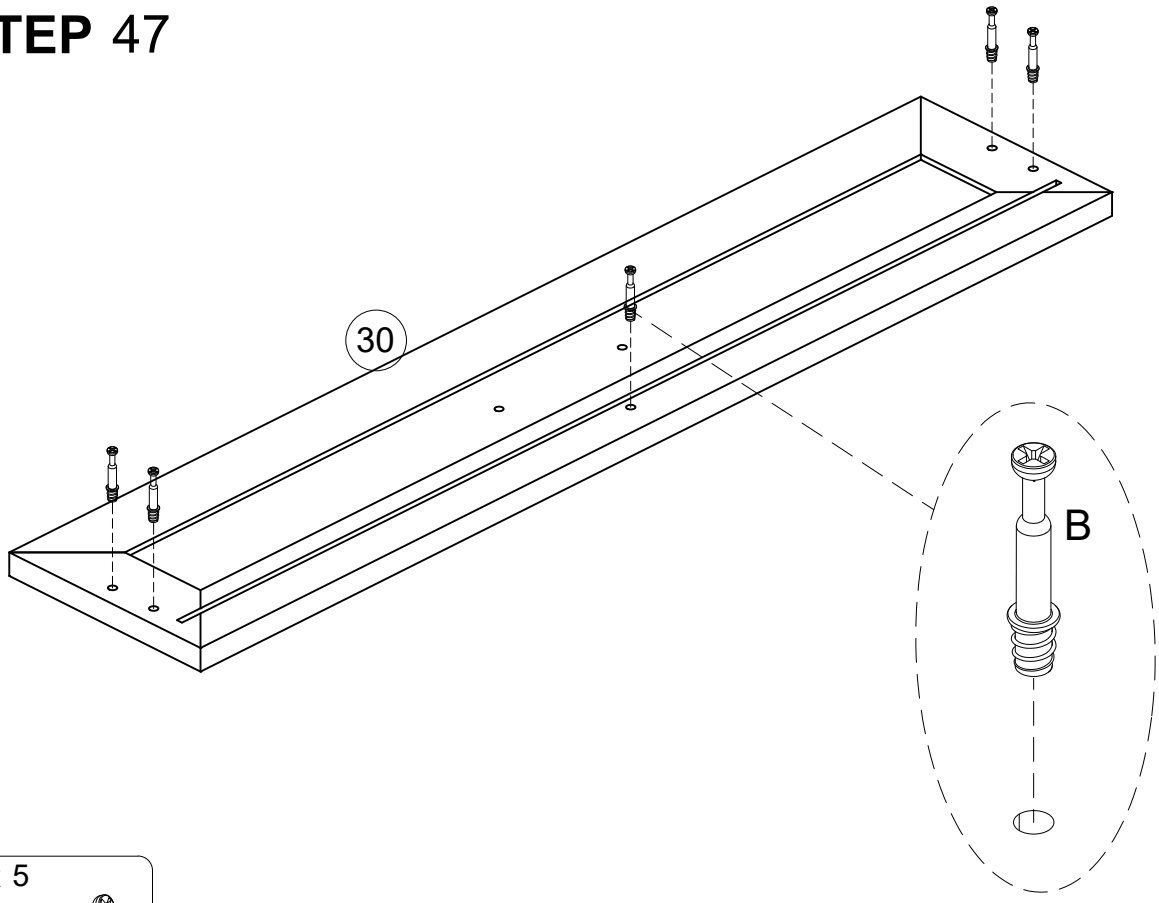


B x 5



Ø6x35mm


STEP 48

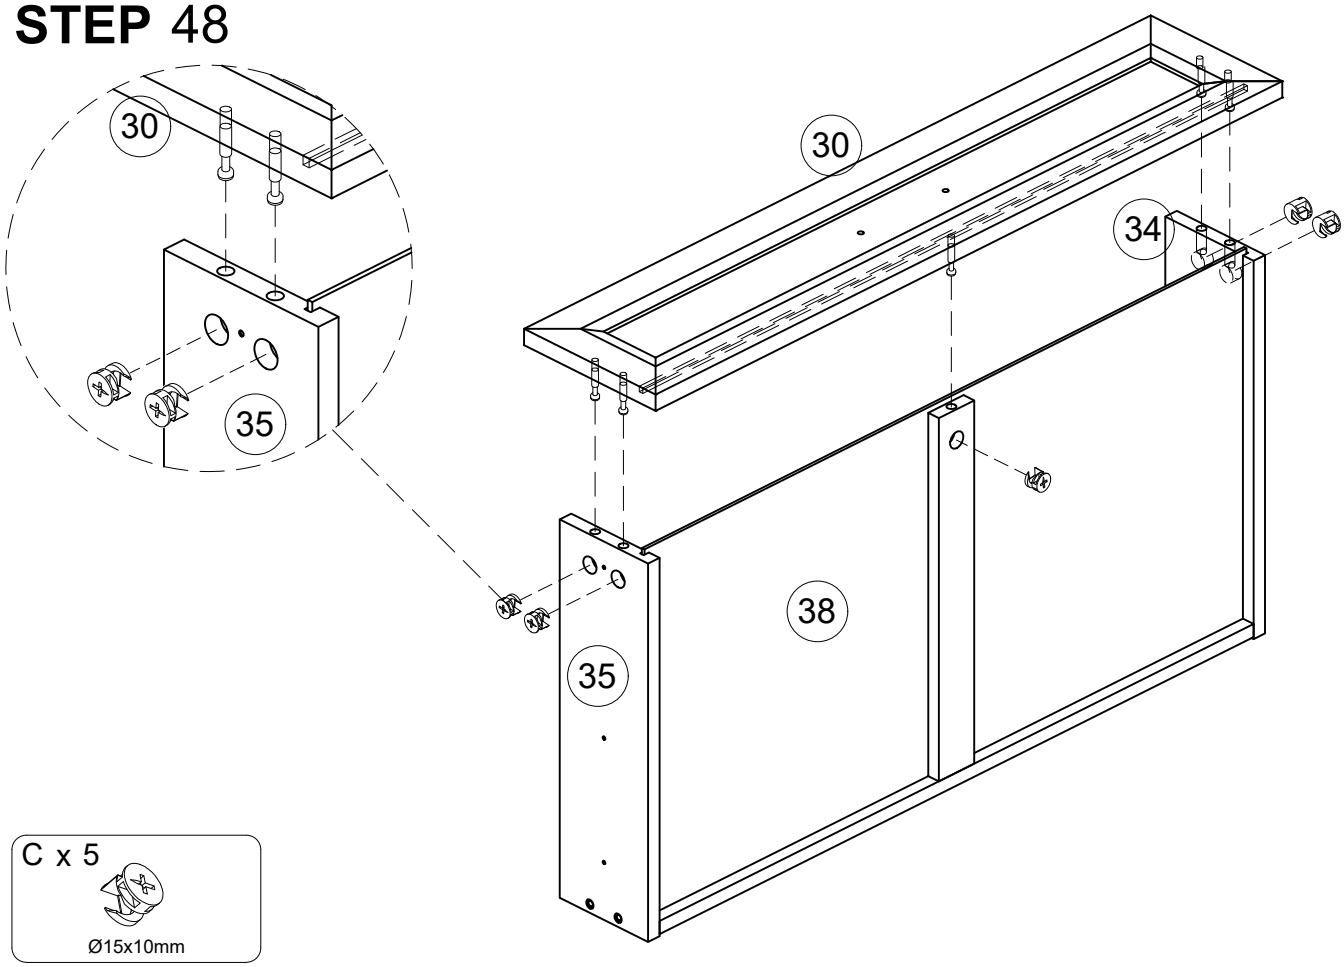


C x 5


Ø15x10mm


STEP 49

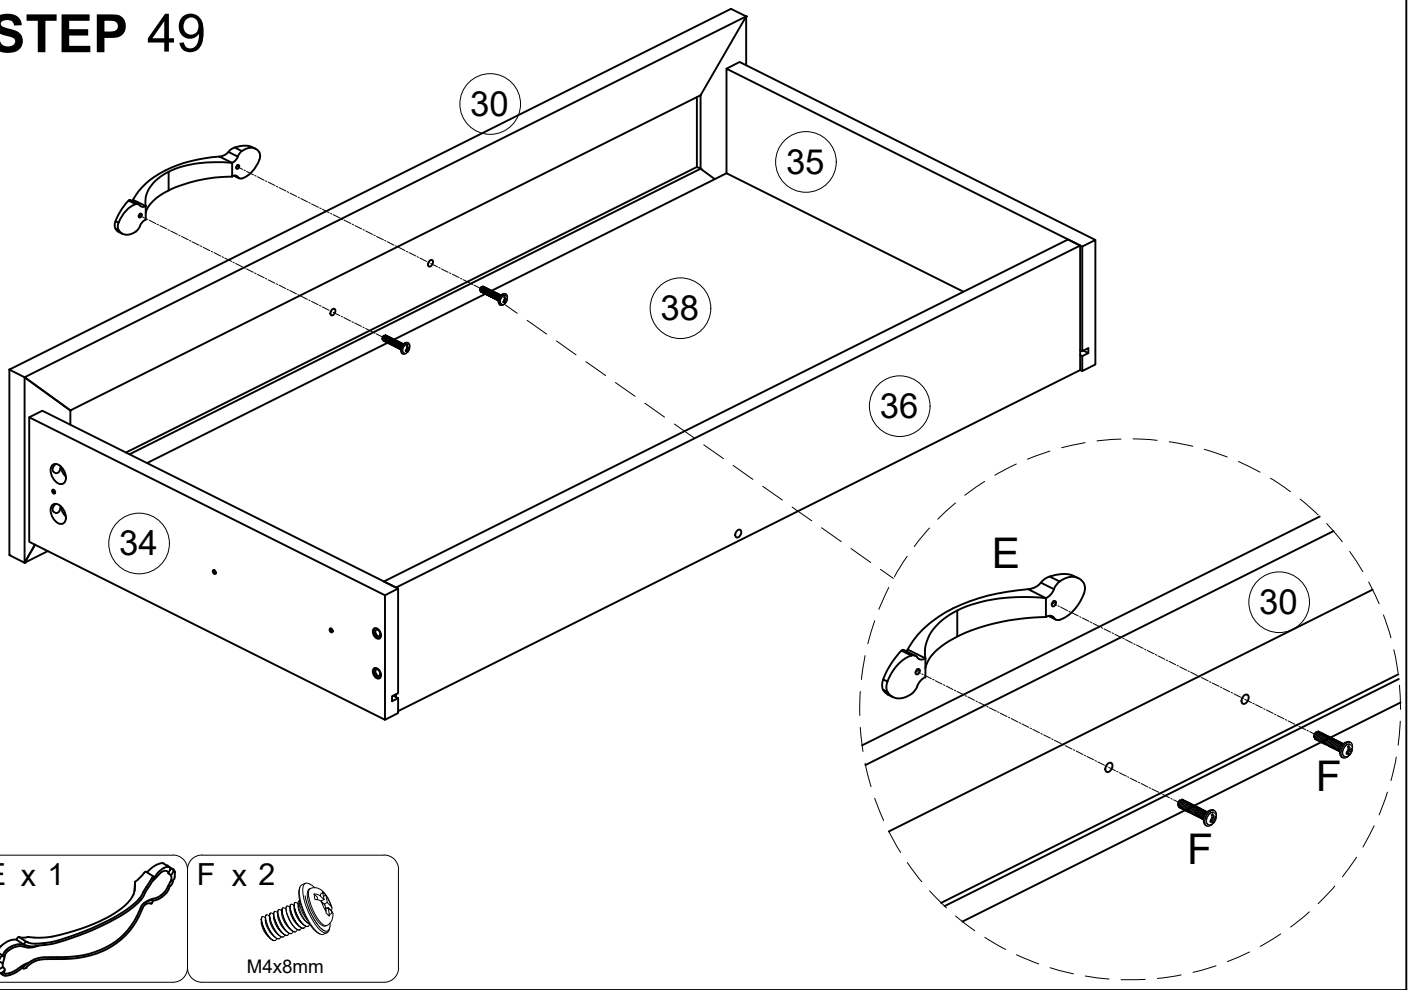



STEP 50

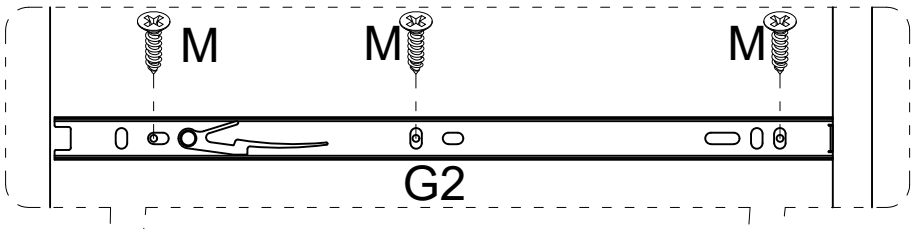




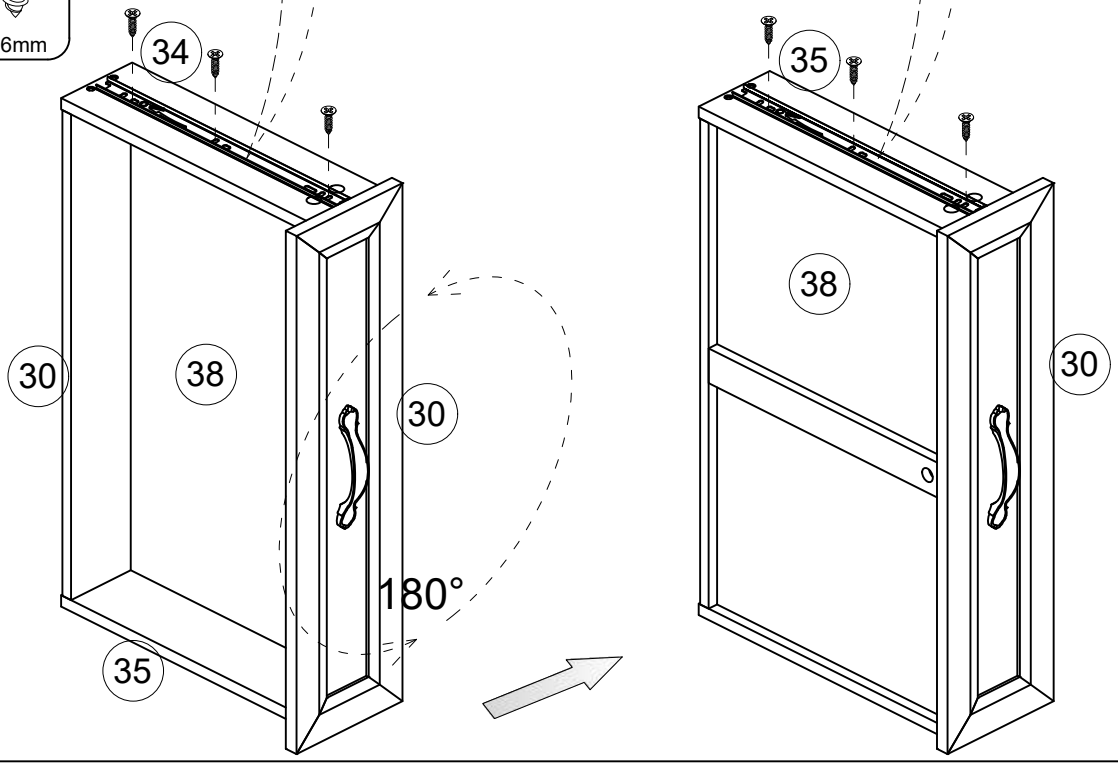









STEP 51

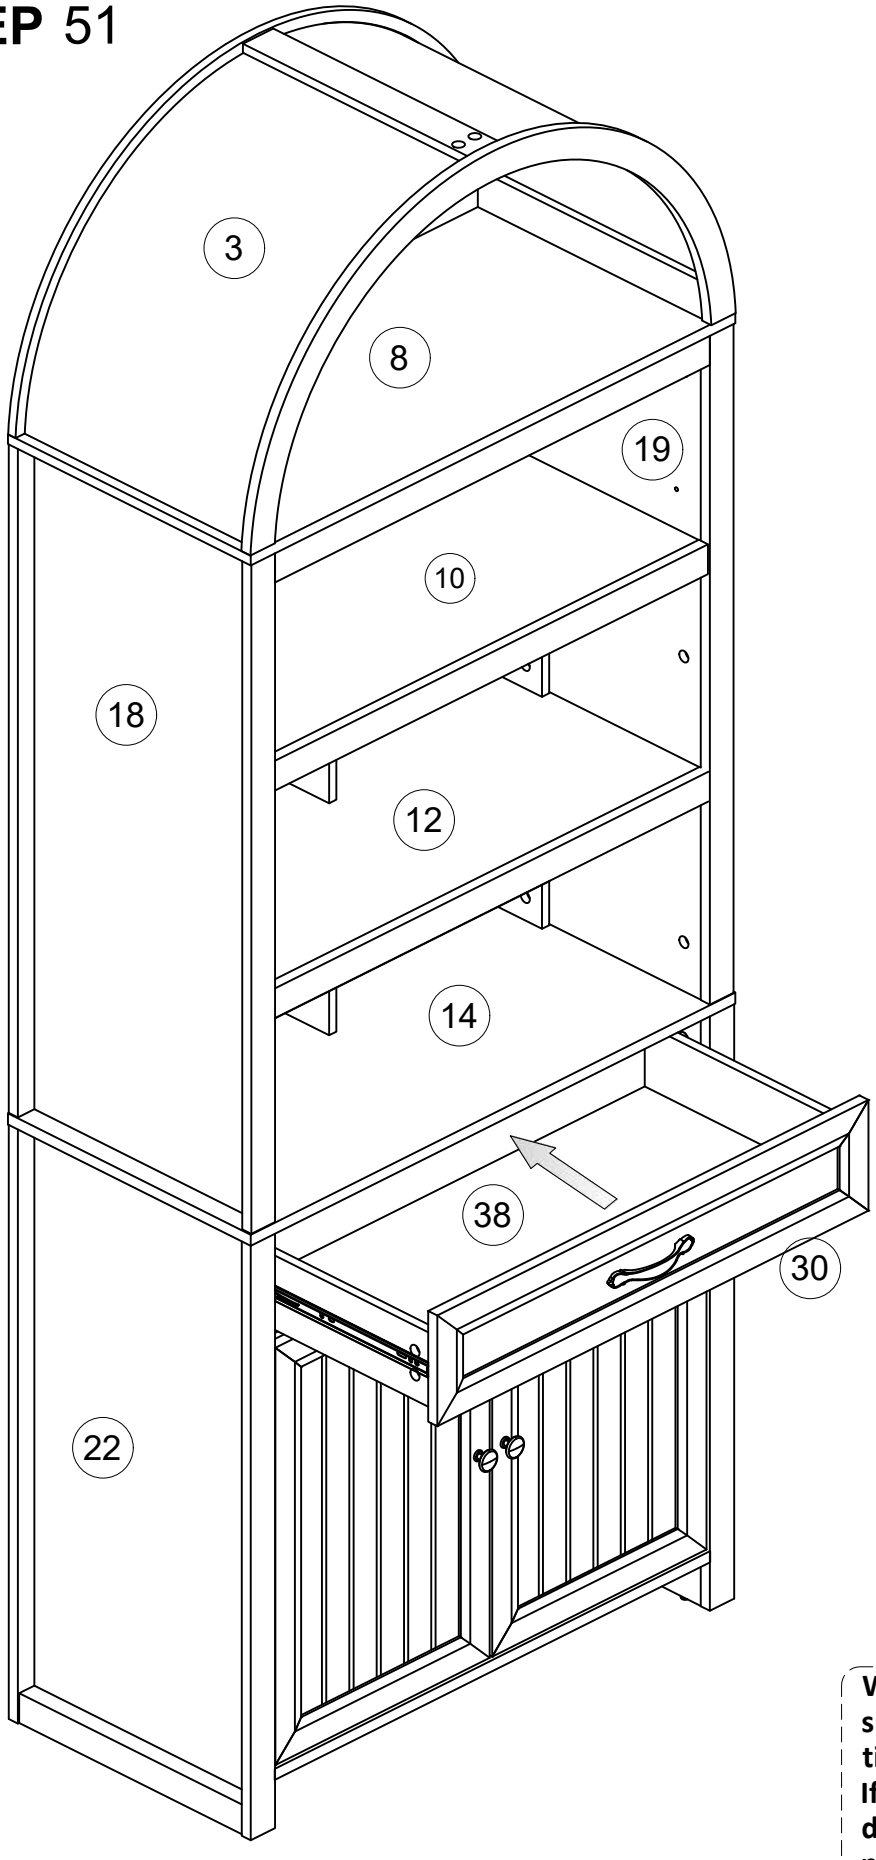

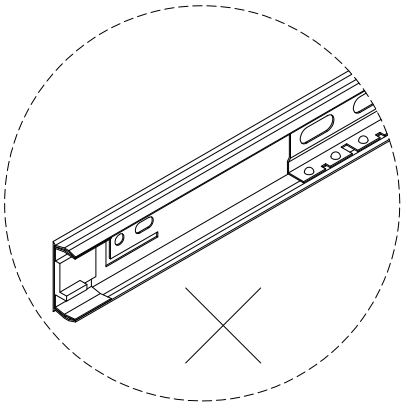

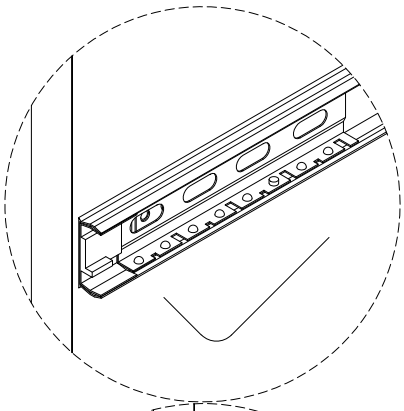


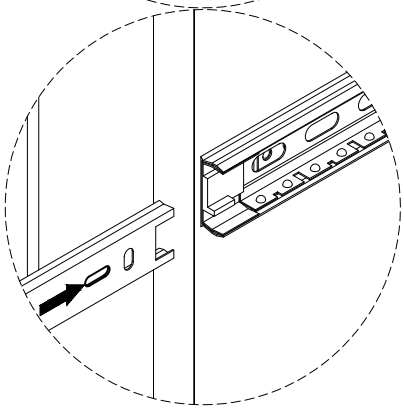


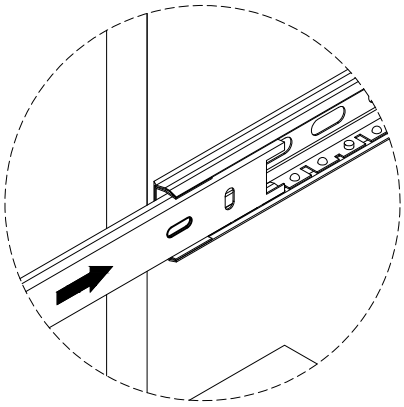



When installing the slide rail, it should be inserted at the same time, and then pushed together. If you have trouble pushing the drawer forward, pull back and push again

STEP 52

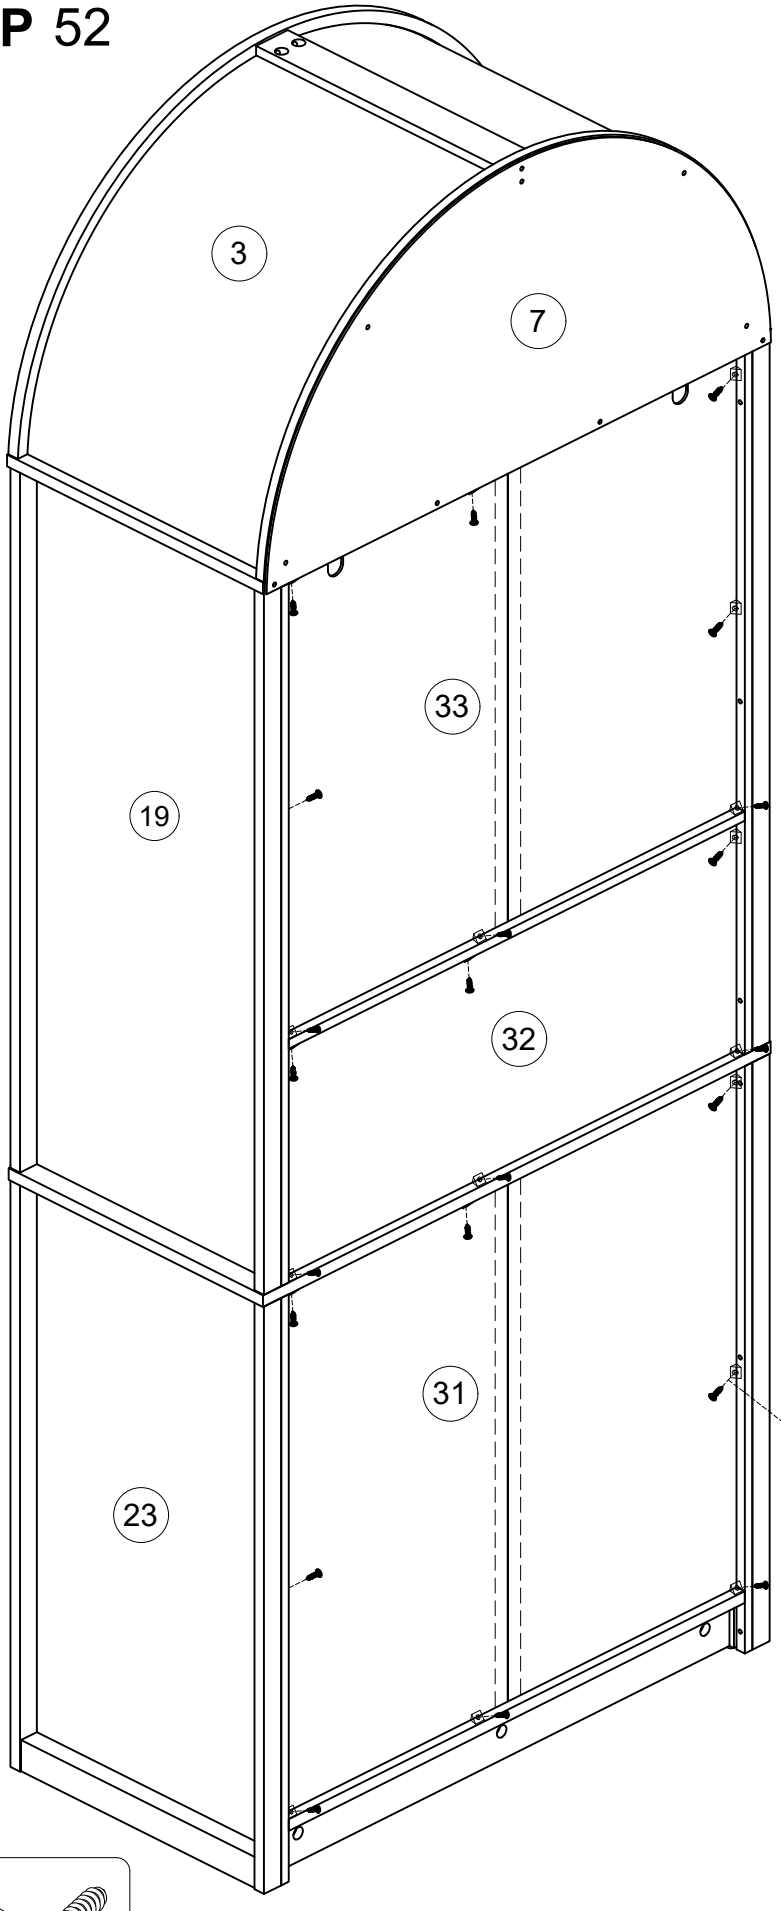





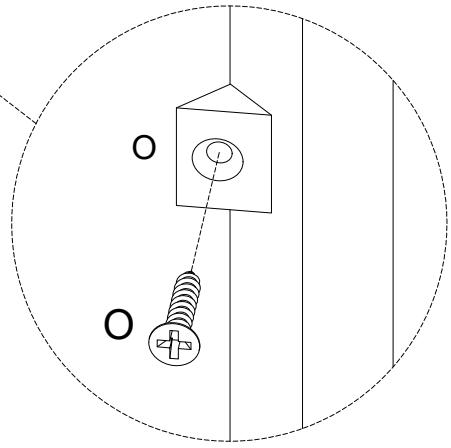




STEP 53

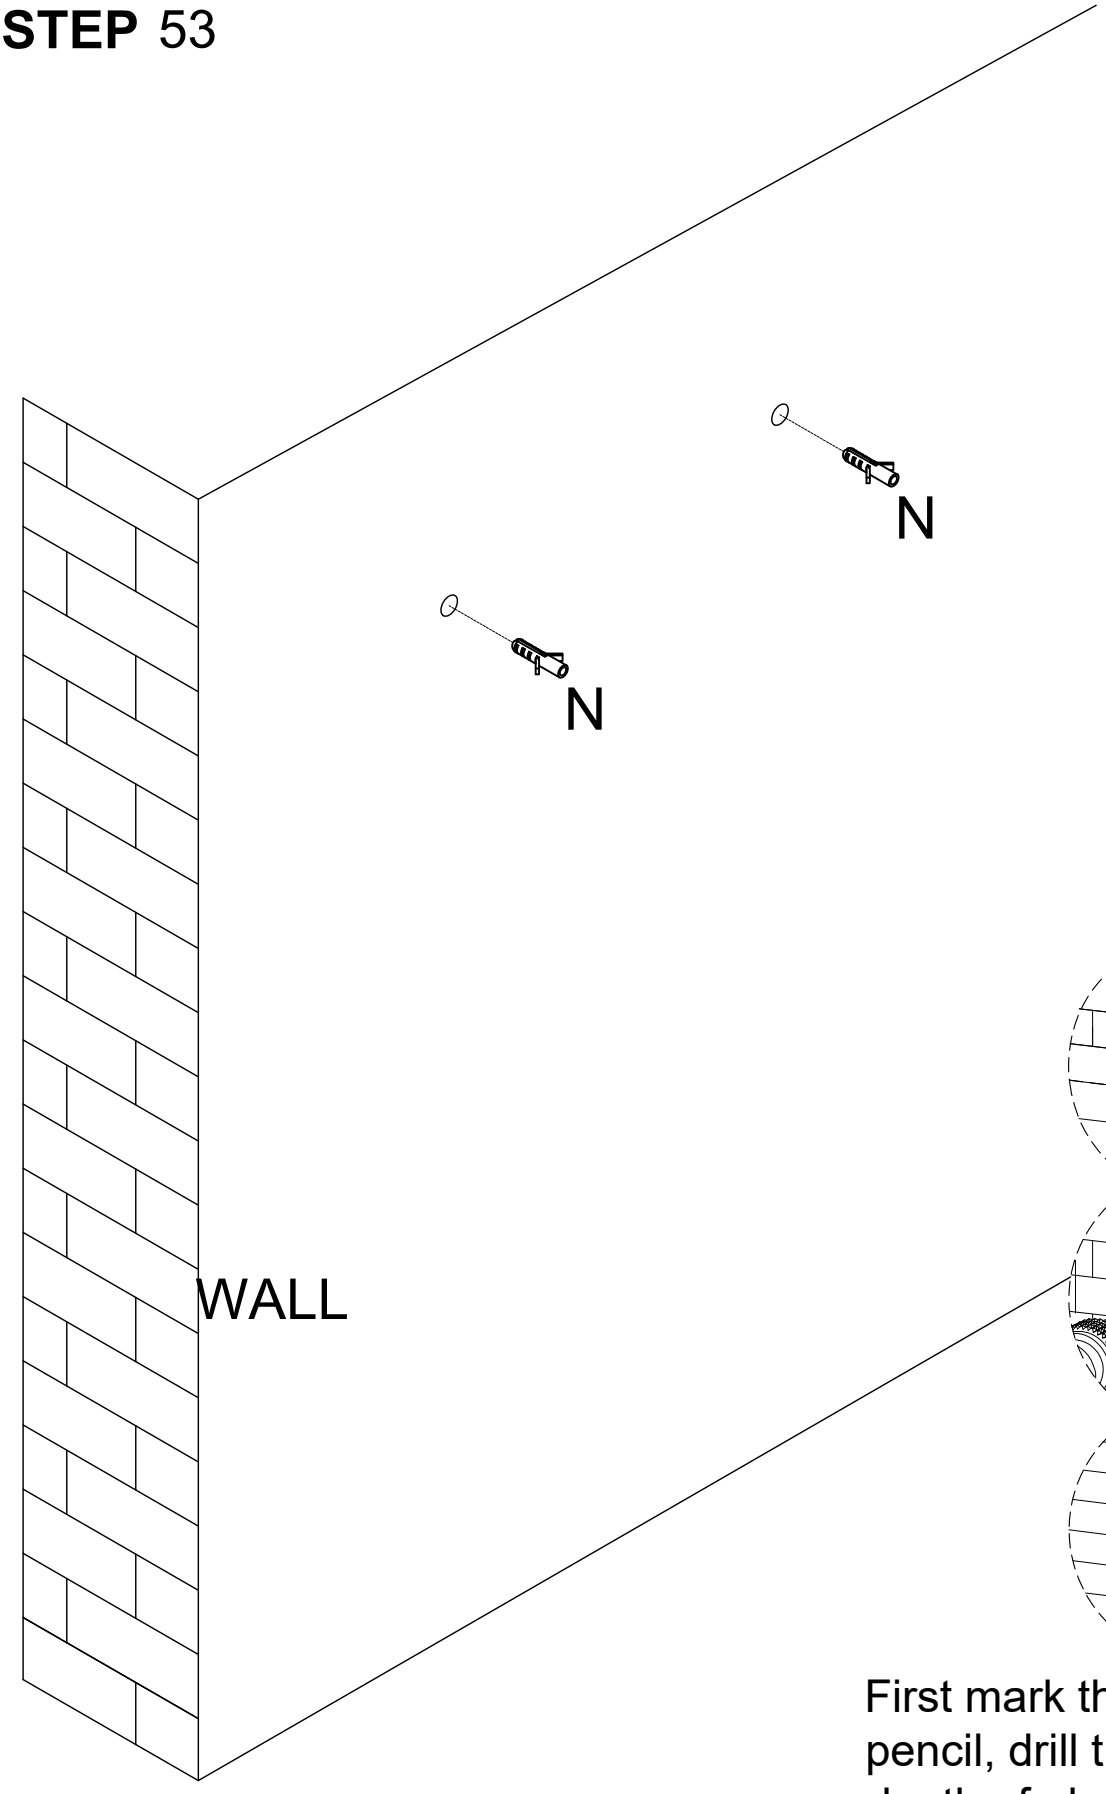


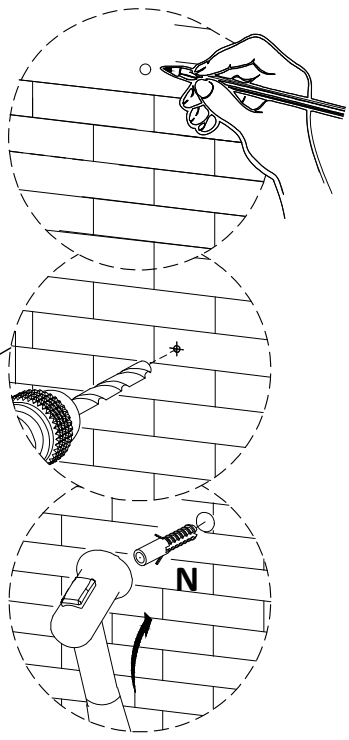

First mark the wall with a pencil, drill the hole to a depth of about 30mm, and knock in the accessory (N)




STEP 54

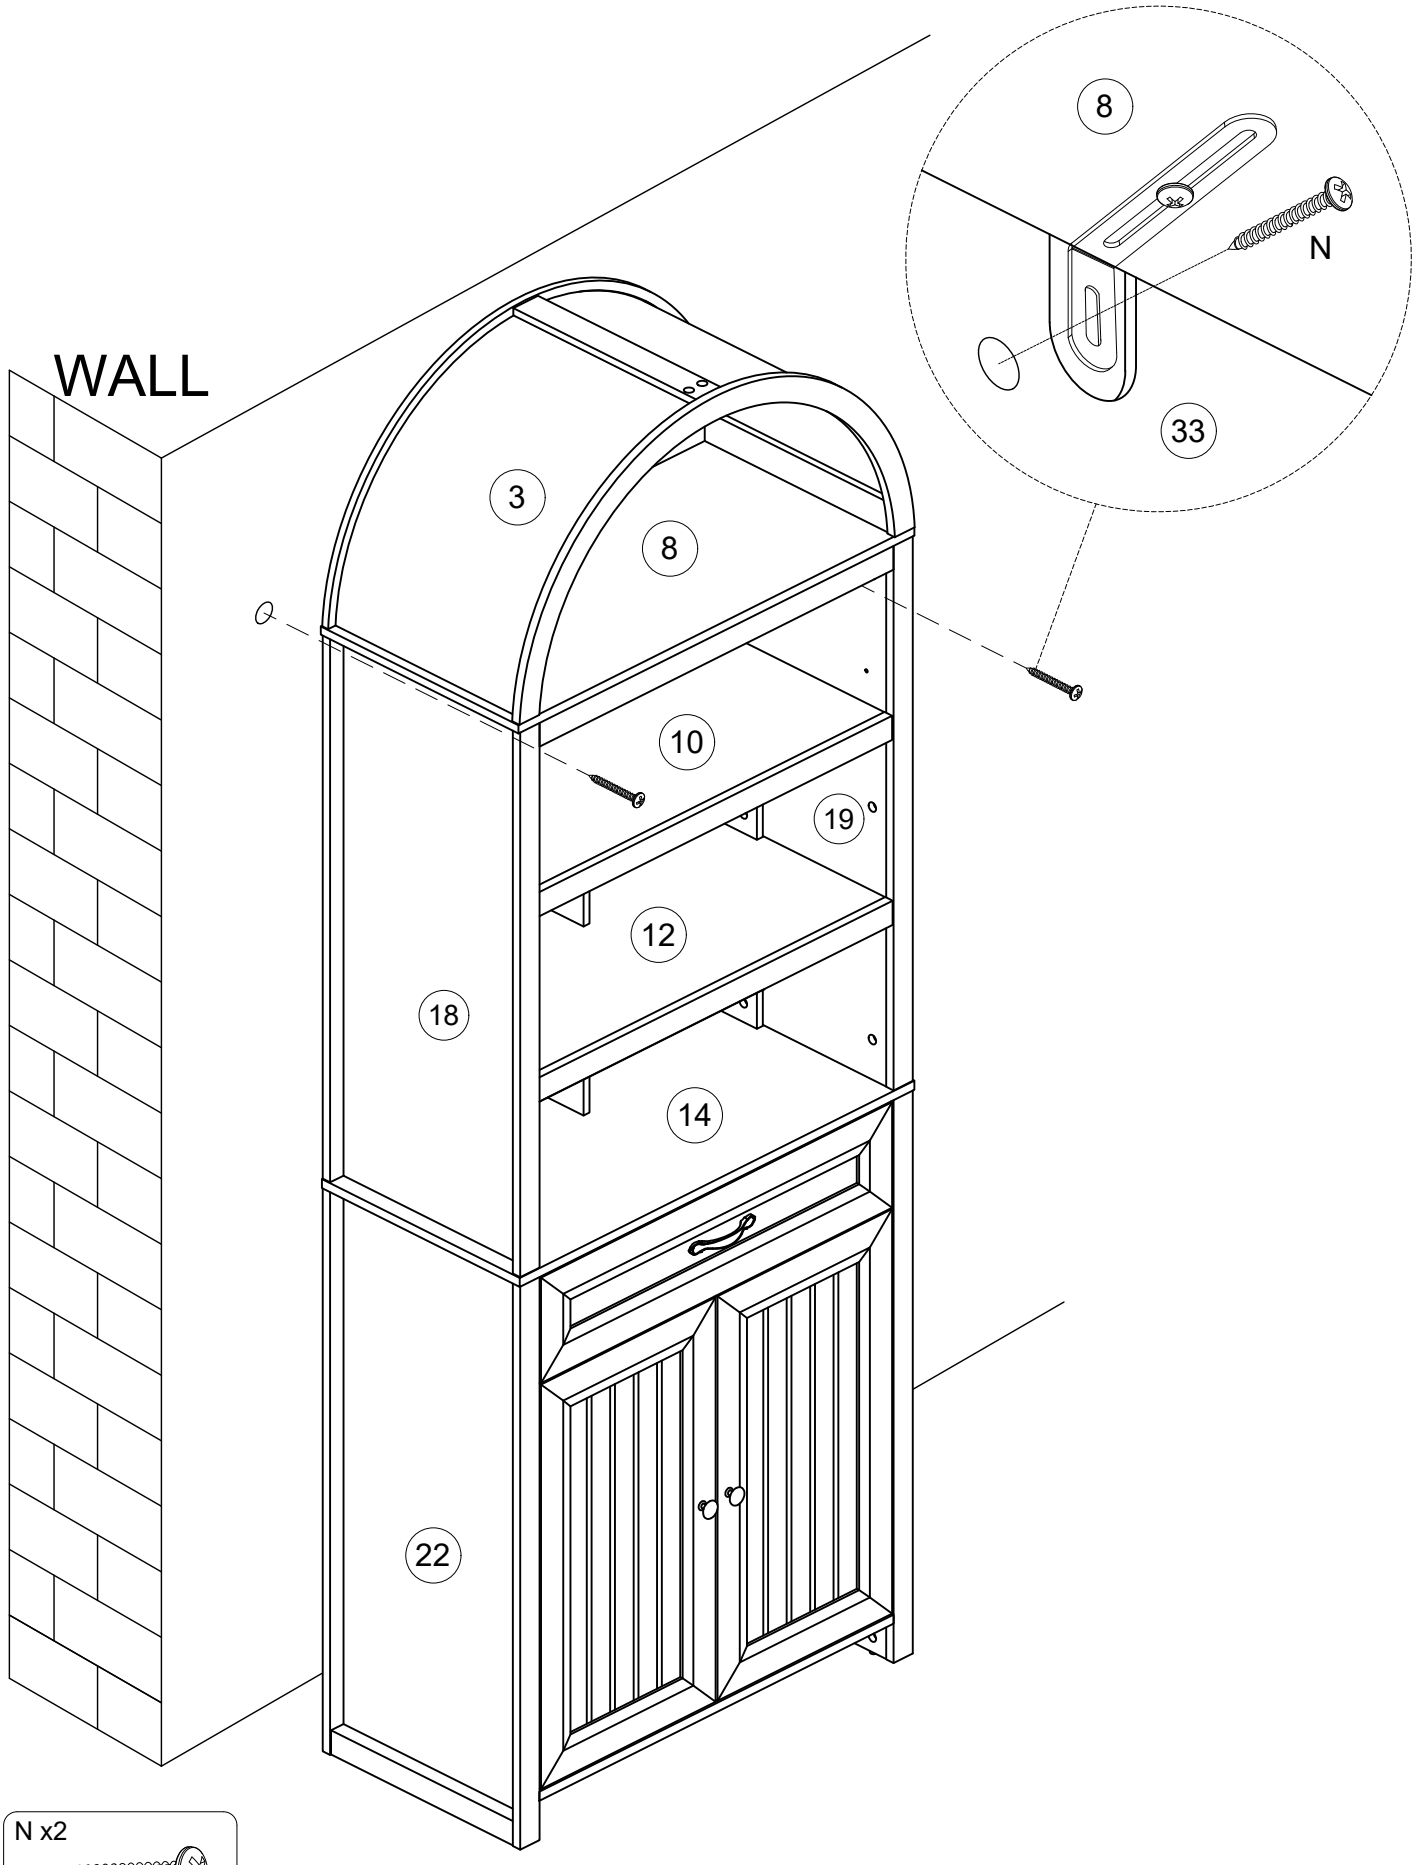


N x2


Ø8xØ4x38mm

STEP 55

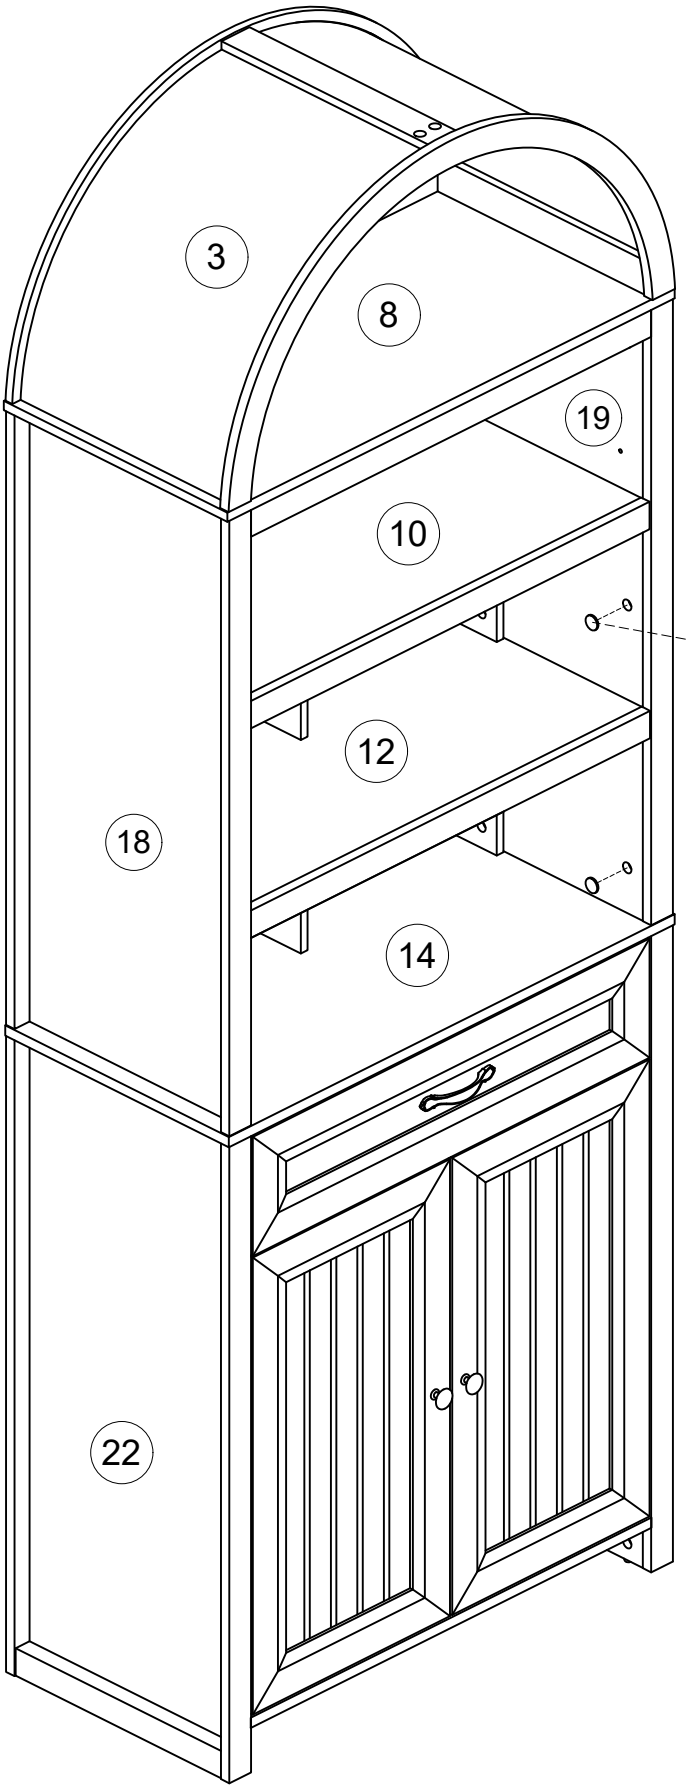


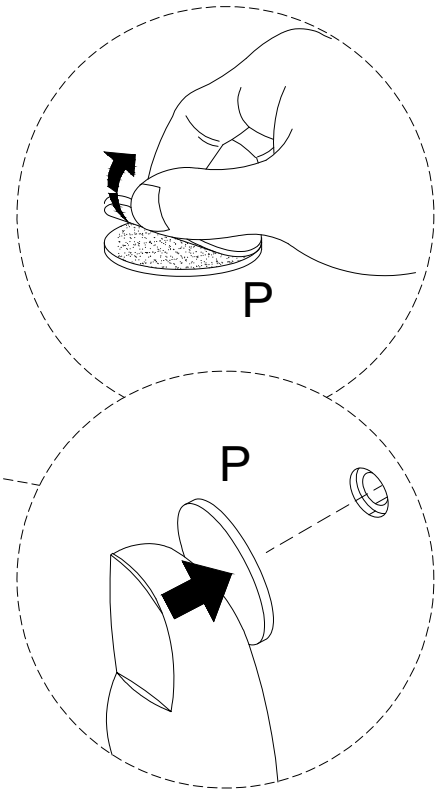


Cover the visible hole with a cap



STEP 56

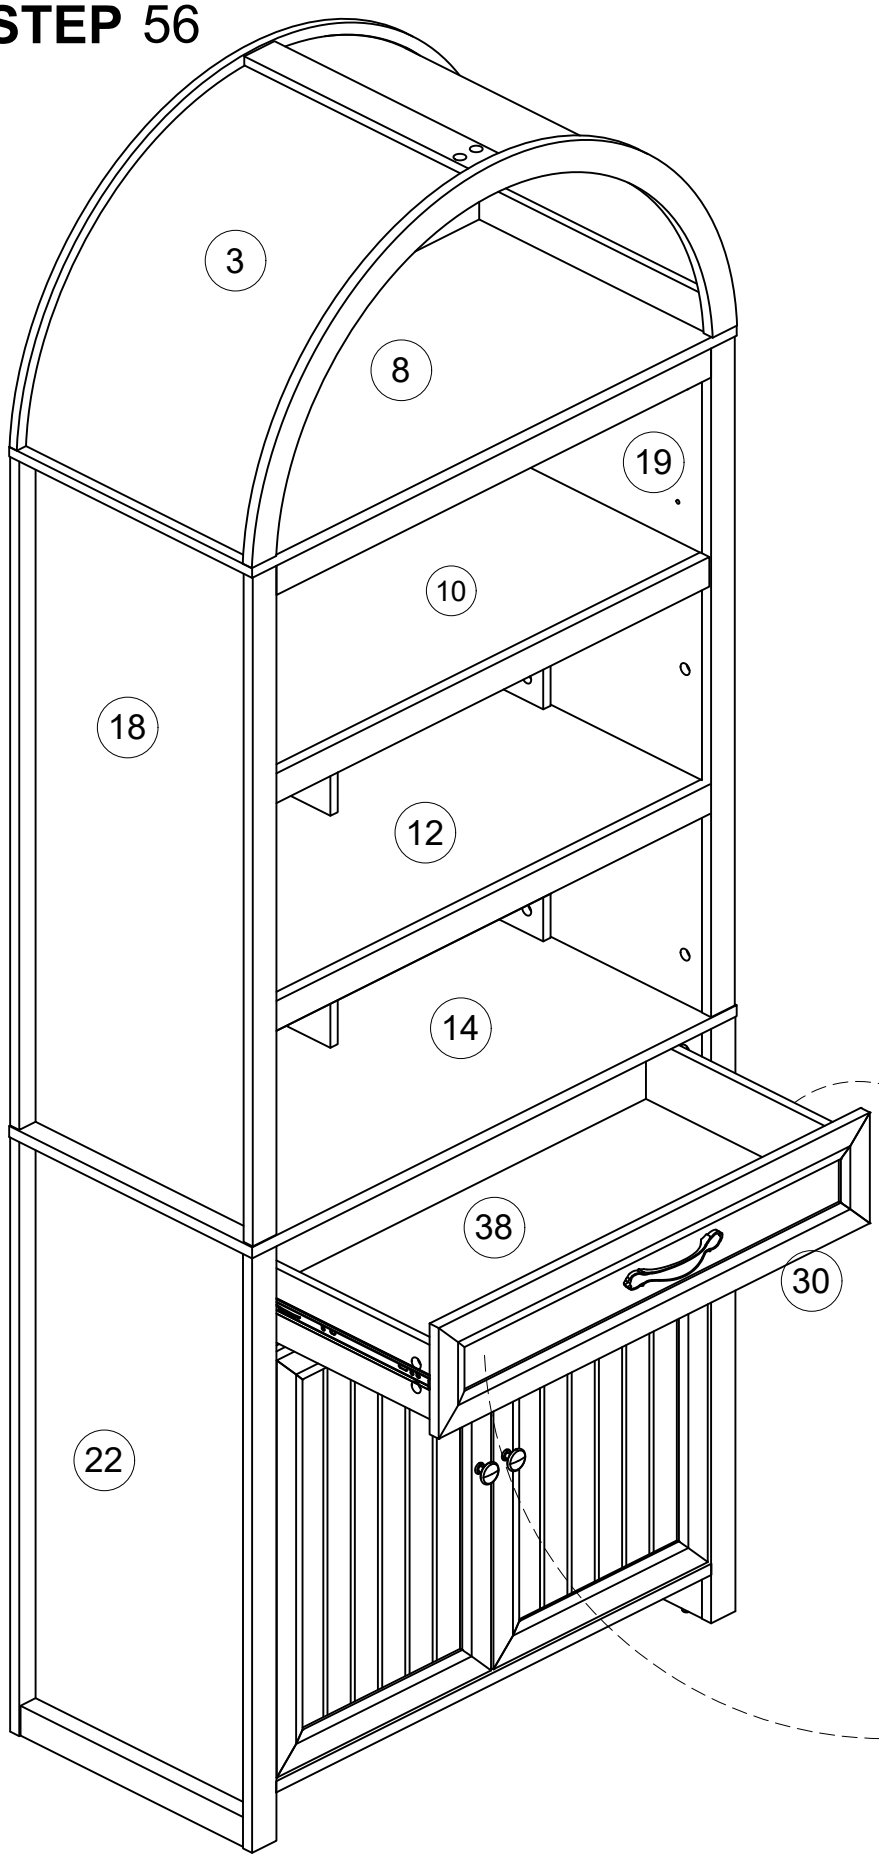


This screw can be loosened to adjust the top and bottom gaps of the drawer

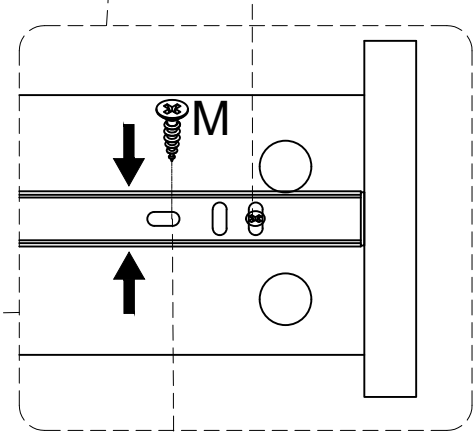

Lock screw (M) after adjusting the upper and lower gaps

Mx2



Ø7xØ3.5x12mm