

# ASSEMBLY INSTRUCTIONS

Only the technical personnel can be allowed to fix and align.

## ATTENTION!

Be sure that the power is switched off at the electricity supply before commencing work.

## INSTRUCTIONS

Install the parts according to the tag as shown in figure B shows. Install the mounting screw, and should be fixed to the ceiling in the right place. (See picture 1); there are one tapping hole & two

supply ground wire (2) on the green ground screw (15) and then put

the hole. Connect the fixture ground wire (3) with supply ground wire connecting terminal (12). Caution: DO NOT connect ground wire with power wire.

Connect the fixture supply wire with power supply wire. Caution: Remember to distinguish the positive and negative charges. (See picture 2) Strip the end of the supply wire up to the ceiling and lock cutfish nut on the wall.

## CEMENT BULB

Do not exceed the maximum wattage.  
Bulbs recommended: E26 1x60W Max.Type



## MAINTENANCE CARE

Wipe with a soft dry cloth.

## SAFETY INFORMATION

The fixture must be used in rated voltage, and do not touch the bare hands. Always switch off the electricity and allow to cool for 10 minutes before changing the bulbs.

If the external cables have been damaged, please change or contact the manufacturer or service agency or professional electrician in order to avoid the danger.

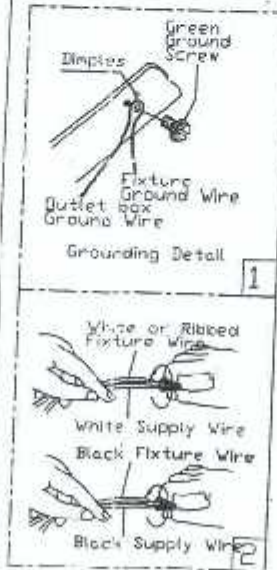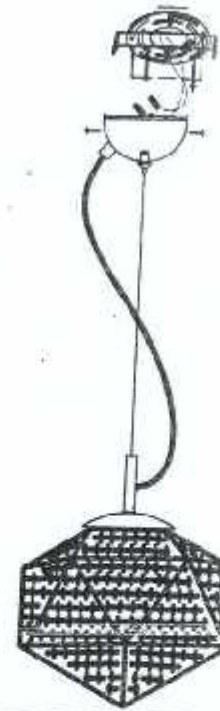

A

