



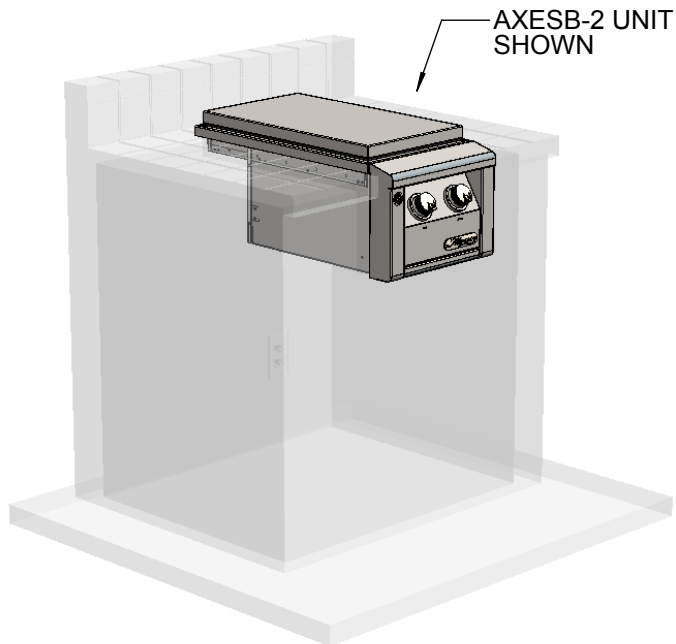


AXESB-2 TYPICAL INSTALLATION

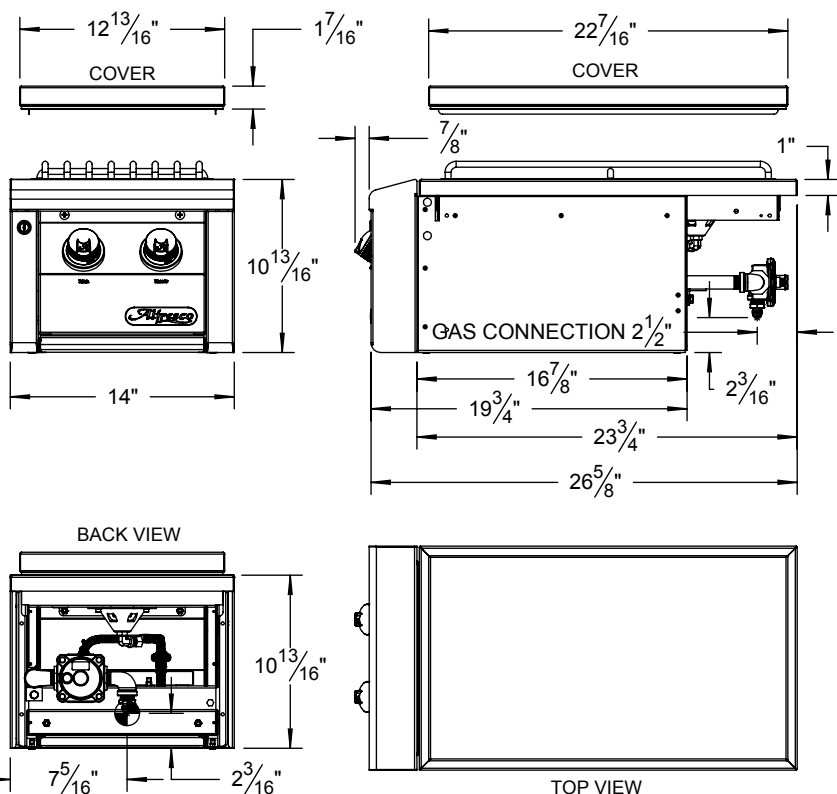


COUNTERTOP CUTOUT REQUIREMENTS

NOTE: A GAS LINE IS REQUIRED INSIDE THE COUNTER FOR OPERATION FOR LP-GAS SETUP SEE NOTE AT RIGHT. IT IS RECOMMENDED THAT A FLEXIBLE HOSE IS USED FOR NG-GAS SETUPS TO EASE INSTALLATIONS.

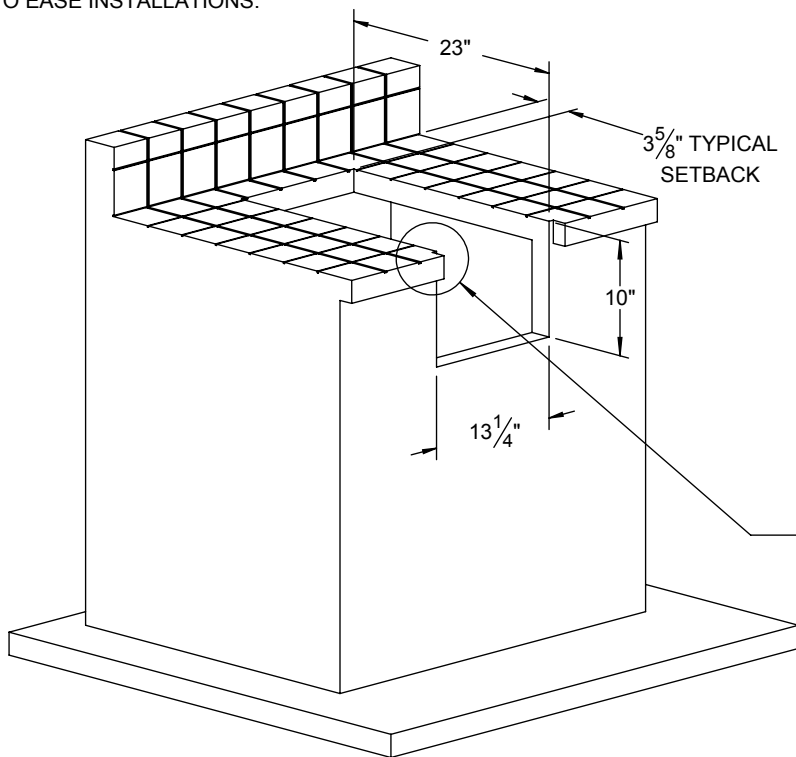

LP GAS SETUP:

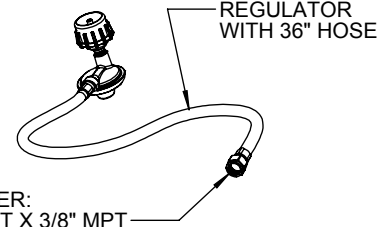

NOTE: STANDARD UNIT HAS A NATURAL GAS (NG) CONNECTION WITH 1/2" FPT FITTING.

IF LIQUID PROPANE (LP) OPTION IS ORDERED THE UNIT IS SUPPLIED WITH A REGULATOR, HOSE AND ADAPTER FITTING AS SHOWN.

SPECIFICATIONS:

BTUH = 40,000
FUEL = NG @ 5" W.C. OR LP @ 10" W.C.
ELECTRICAL POWER = 9 VDC BATTERY
GAS CONNECTION = 1/2" NPT (NG) OR 3/8" ODF (LP)

Alfresco
SUPERIOR EQUIPMENT SOLUTIONS
7039 EAST SLAUSON AVENUE
COMMERCE, CA. 90040

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPERIOR EQUIPMENT SOLUTIONS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM SUPERIOR EQUIPMENT SOLUTIONS, INC. IS PROHIBITED.

DRAWN BY: ADRIAN CRISCI
CREATED: 08/10/2015

PROJECT TITLE:

AXESB-2

DRAWING TITLE:

AXESB-2 SIDE BURNER SPECIFICATIONS

DRAWING NO.: **AXESB-2 SPEC SHEET**

SHEET 1 OF 1