

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-19403R 8" - 3 Lights	2 700K/3000K/3500K/4000K 90	63 W	2897	BK Black

Example: **PD-19403R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicon diffuser




FINISHES:



Black

LINE DRAWING:

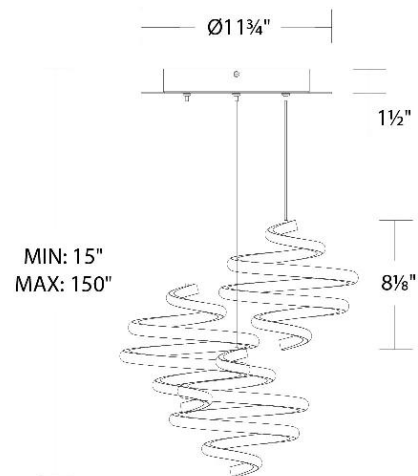

PD-19403R

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-19405R 8" - 5 Lights	2 700K/3000K/3500K/4000K 90	101 W	4621	BK Black

Example: **PD-19405R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicon diffuser




FINISHES:



Black

LINE DRAWING:

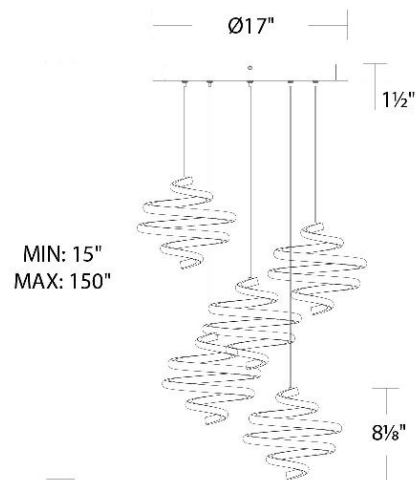

PD-19405R

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-19409R 8" - 9" Lights	2 700K/3000K/3500K/4000K 90	187 W	8318	BK Black

Example: **PD-19409R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicon diffuser




FINISHES:



Black

LINE DRAWING:

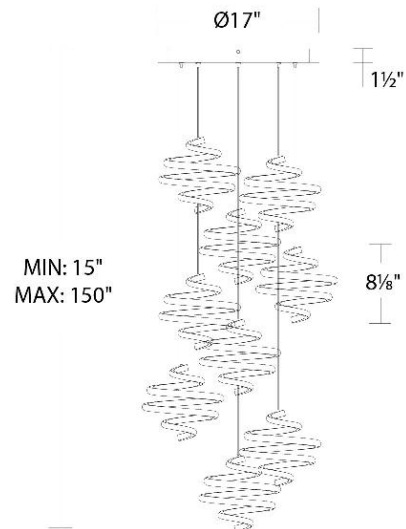

PD-19409R

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-19415R 8" - 15 Lights	2 700K/3000K/3500K/4000K 90	315 W	13556	BK Black

Example: **PD-19415R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicon diffuser




FINISHES:



Black

LINE DRAWING:

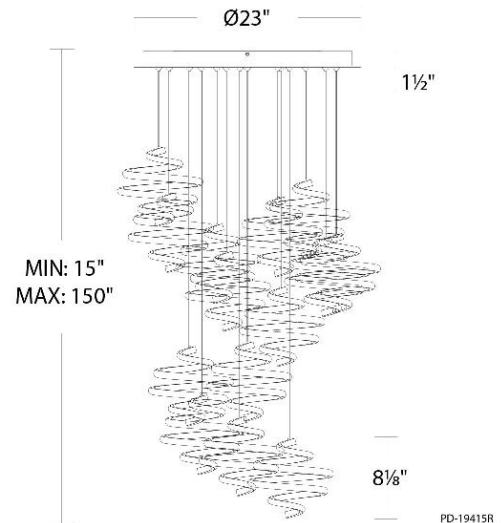

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-19421R 8" - 21 Lights	2 700K/3000K/3500K/4000K 90	439 W	18142	BK Black

Example: **PD-19421R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicon diffuser



FINISHES:



Black

LINE DRAWING:

