


WIRE CONNECTION DIAGRAM

Wires met safety standards are recommended to connect the supply circuit.

CAUTION: Risk of fire

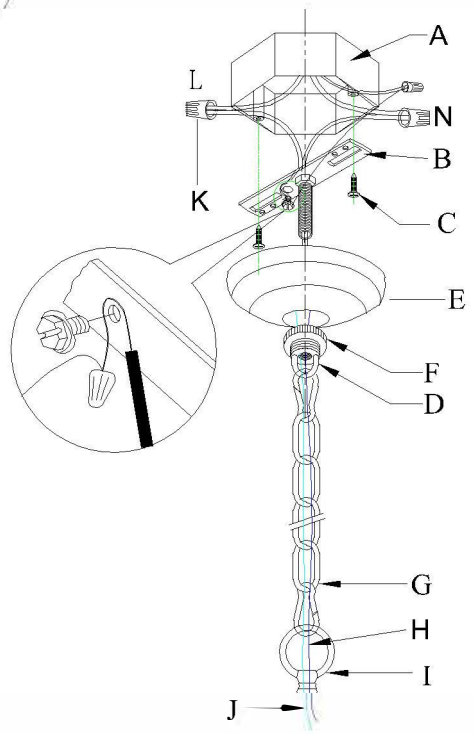

CANOPY INSTALLATION INSTRUCTIONS

Please read all instructions carefully, Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a letter. Please proceed in an alphabetical order.


A. Existing Electrical Box
B. Crossbar
C. Crossbar Screws
D. Canopy Loop
E. Canopy
F. Canopy Loop Nut lock
G. Chain
H. Ground Wire
I. Loop
J. Wire
K. Junction Caps

Attach the crossbar (B) to the existing electrical box (A) using the two crossbar screws (C) which are not supplied and should already be in your box.


Slide the canopy loop nut lock (F) back up over the canopy loop (D), pass the canopy loop (D) through canopy (E), connect with the threaded pipe underside of the crossbar.

Pass the main wire (J) and ground wire (H) through the loop (I), the chain (G), the canopy loop nut lock (F), the canopy (E), the canopy loop (D) and the crossbar (B) until the end of the main wire (J) reaches the electrical box (A) where you can make the appropriate connections. When connecting the wire use electrician approved junction caps (K). Stow the excess wire in the electrical box(A). Raise the canopy (E) and canopy loop nut lock (F), attach canopy (E) to ceiling, slide canopy loop nut lock (F) over canopy loop (D) and hold the canopy (E).


Light Bulb (Not included)



E26



Buckle is used to connect the chain and loop or adjust the length of chain.

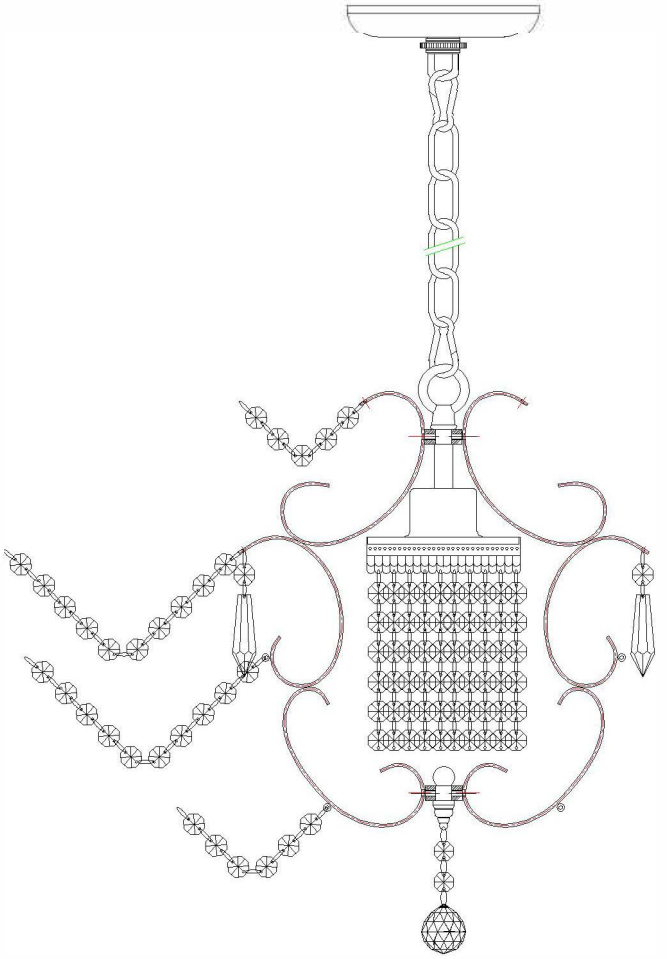


(Rated 110-130V/60Hz, bulb 40W-60W maximum.)

Assembly and Installation Steps

Step 5

5A. Lock the crossbar to the junction box of the ceiling by using 2 pcs of 5/32 screws in the accessories bag.
5B. Connect the wires. The hot/positive (+) wire is the one which has writing on it.The negative (-) wire is the one which has no writing.
5C. Cover the celing canopy and attach the screws to the canopy.

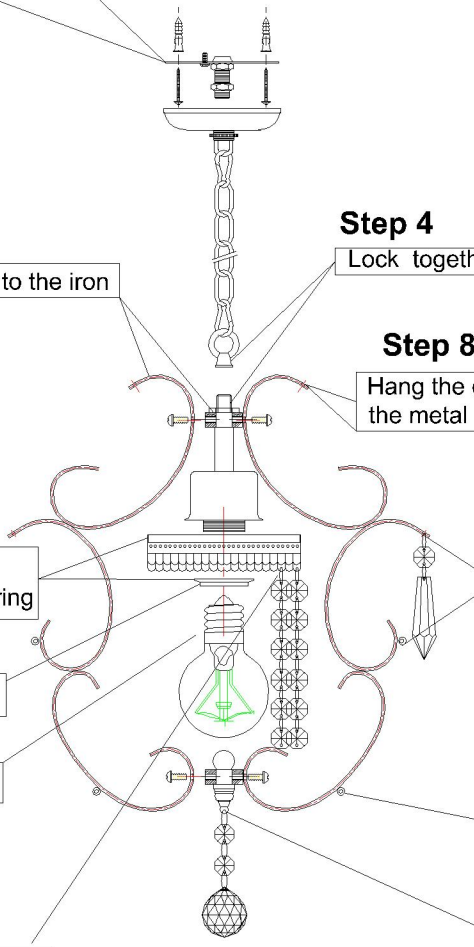

Step 1


Fix the lamp arm to the iron

Step 4

Lock together

Step 8

Hang the crystals from the metal ring Keyhole.





Step 3

Place the hardware cover on the lamp holder and tighten the lamp holder ring

Step 2


Remove the outer ring of the lamp head

Step 6

Install 1 E26 bulbs (Not included).

Step 9

Hang the crystals from the metal ring Keyhole.

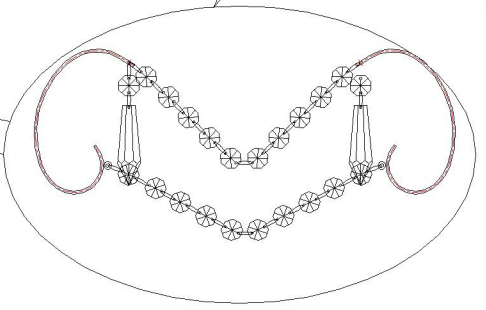

Step 10


Hang the crystals from the metal ring Keyhole.

Step 7

Leave 1 holes before hanging each crystal strand. See Picture A-A on the right.


Step 11

Hang the crystals from the metal ring Keyhole.



Assembly and Installation Steps

Crystal diagram

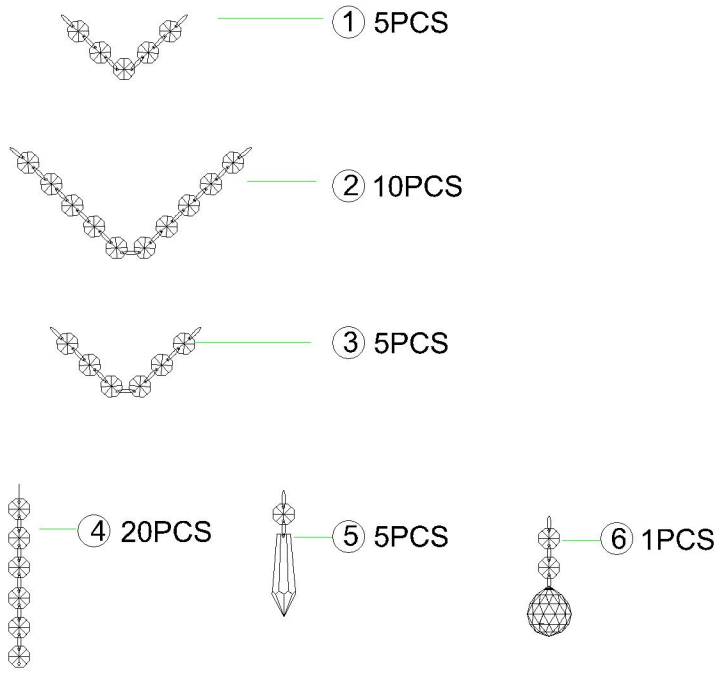

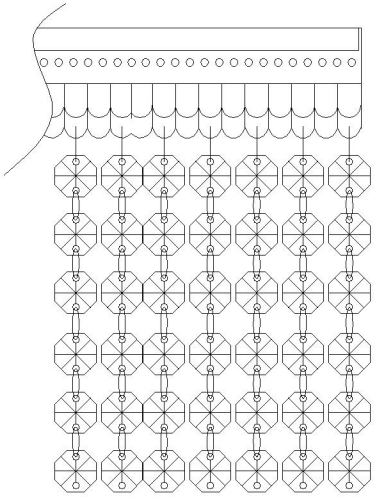


Figure A-A



Please note: The parts in this table are completely unassembled,for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.

