


**RDF1
PREMIUM
RADIATION DAMPER
FOR VENTILATION FANS**

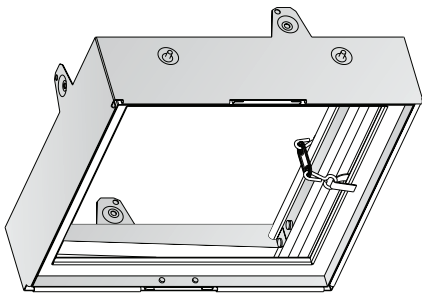

Premium radiation damper for use with Broan and NuTone ventilation fans (sold separately).

FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Separate outer frame allows complete fan and damper servcability without disturbing the surrounding ceiling material
- Meets or exceeds NFPA-90A

RDF1 for use with the following ventilation fan models:

Broan XB50, XB80, XB110, ZB80, ZB110, XB50C, XB90C, XB110C, ZB90C, ZB110C

NuTone XN50, XN80, XN110, ZN80, ZN110, XN50C, XN90C, XN110C, ZN90C, ZN110C


TYPICAL SPECIFICATION

Radiation damper shall be Broan/NuTone RDF1 suitable for use with the following ventilation fan models:

Broan XB50, XB80, XB110, ZB80, ZB110, XB50C, XB90C, XB110C, ZB90C, ZB110C

NuTone XN50, XN80, XN110, ZN80, ZN110, XN50C, XN90C, XN110C, ZN90C, ZN110C

Radiation damper shall be rated for use in up to three hour ceiling constructions. It shall be UL Classified (UL-555C), Warnock Hersey Listed and meet or exceed NFPA-90A.

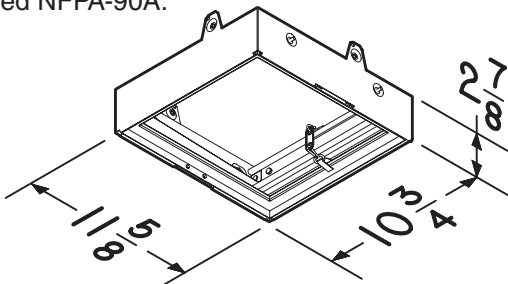

SEE DETAILS ON
UL CLASSIFICATION
MARKING ON PRODUCT



WARNOCK HERSEY
LISTED

Broan-NuTone LLC Hartford, Wisconsin www.broan.com www.nutone.com 800-558-1711
Broan-NuTone Canada Mississauga, Ontario www.broan.ca www.nutone.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date