



Parallel® | K-20716-K

Two-handle wall-mount bath faucet valve

Features

- 1/2" (12.7 mm) quarter-turn washerless ceramic disc valves
- 10.0 gpm (37.9 lpm) maximum flow rate at 45 psi (3.1 bar)
- Requires valve trim (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 03:17 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1

Technical Information

All product dimensions are nominal.

Flow Rate

Faucet Flow Rate: 10 gpm (37.9 l/min)

Valves

Included Valves: Thermostatic, Volume Control

Material


- Solid-brass construction for durability and reliability
-

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



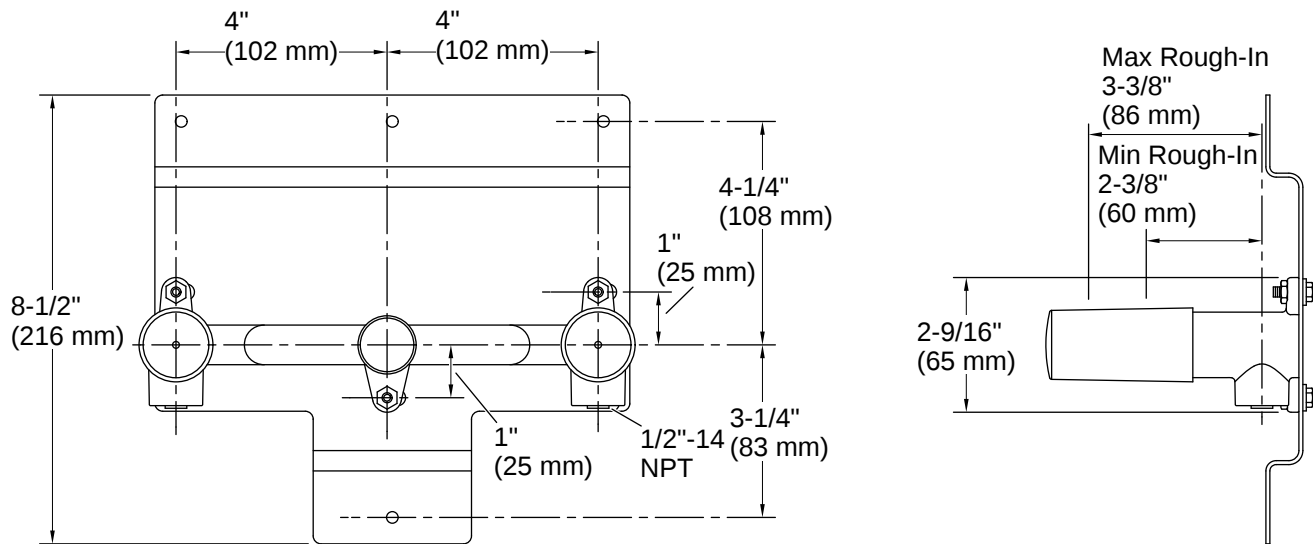

Installation

- For 8" (203 mm) centers
- Wall-mount

Installation Notes

Install this product according to the installation instructions.

