


Installation manual for:

D21" H9.5" L3

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P2) in side of top unit the mounting bracket.
6. Connect the top suction plate (P3) and the boom (P8),(P10),(P11) to the lamp body.
7. Place the top suction plate(P3) on the hanging plate (P1) and screw(P4) tightly.
8. Install E26 light source,no include bulb.
9. Place the glass cover (P20) on the semicircular cover (P16).

The end!

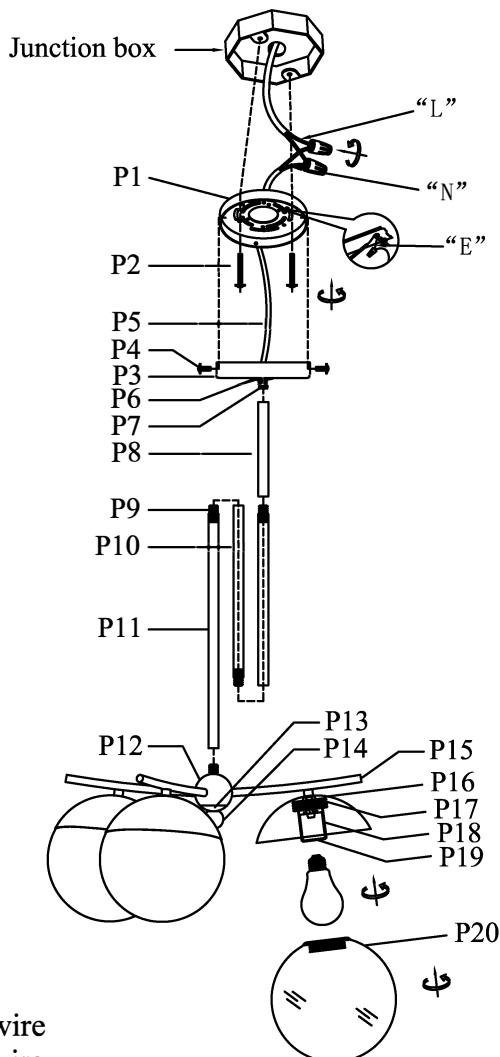

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check list
P1		D5.5" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		D6" Canopy plate	1	
P4		5/32-32 Screw	3	
P5		Power Cord 5' Black	1	
P6		D1.2" Round flat gasket	1	
P7		Pipe Plug	2	
P8		D0.63" x L6" ROD	1	
P9		Pipe Plug	3	
P10		D0.63" x L12" ROD	2	
P11		D0.63" x L16" ROD	1	
P12		D2.76" Metal Wire Box	1	
P13		D2" Wire Box	1	
P14		Cap nut	1	
P15		L8" Straight pipe weldment	3	
P16		D7.28" Semicircular cover	3	
P17		D2.16" Screw die	3	
P18		Socket cover	3	
P19		E26 Socket	3	
P20		D8" Milk Glass	3	