

Features

- Slotted overflow for maximum bathing depth
- Integral lumbar support
- Molded armrests for extra comfort
- Six concealed speakers send sound waves through the water to gently massage the body
- Plug in your smart phone, tablet, or MP3 player via auxiliary in cable. Add your own receiver to stream wirelessly via Bluetooth
- Immediate and manual purge cycles remove residual water from air channels after use
- Bask™ Heated Surface provides soothing warmth on your back and neck
- Three heat settings allow you to customize the surface temperature
- Lighted keypad controls
- Textured Bottom Surface
- Two-piece design
- 67-3/4" (1568 mm) x 31-3/4" (806 mm) x 22" (559 mm)

Material

- Exocrylic™

Hydrotherapy

- VibrAcoustic

Installation


- Freestanding Bath
- End Drain Placement
- Requires 120V electrical service
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).

Required Accessories

K-7271 Slotted Overflow Bath Drain

or

K-7272 Slotted Overflow Bath Drain

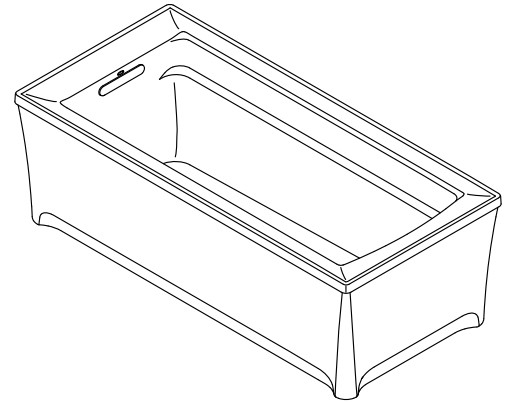






Codes/Standards

CSA B45.5/IAPMO Z124
UL 1795
CSA C22.2 No. 218.2

See website for detailed warranty information.



Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

No change in measurements if connected with drain illustrated. (K-7272)


█ Recommended faucet area.

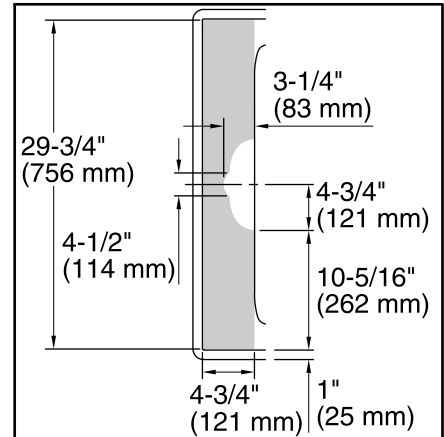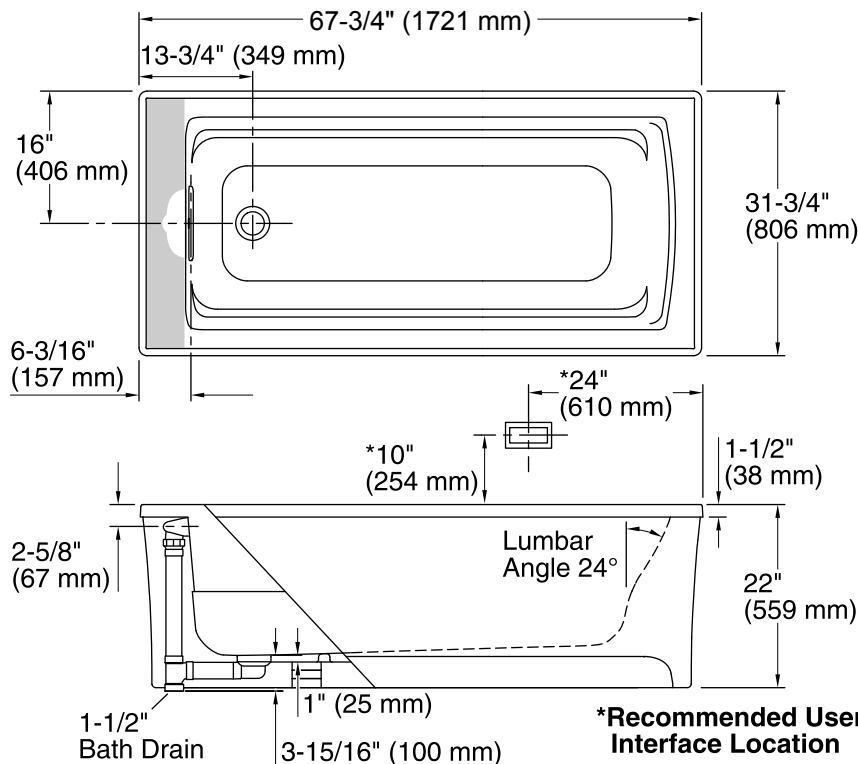

Recommended Faucet Area Detail

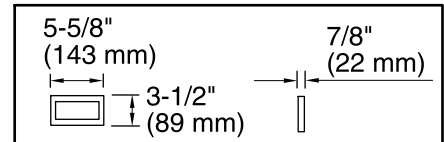

User Interface

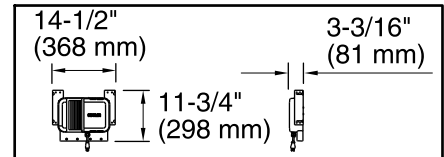

Control Amplifier

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface, 120 V, 15 A, 60 Hz
Amplifier:

Technical Information

All product dimensions are nominal.

Installation:	Freestanding
Drain location:	Reversible
Basin area, bottom:	51-1/16" x 19-11/16" (1297 mm x 500 mm)
Basin area, top:	58-9/16" x 25-5/16" (1487 mm x 643 mm)
Weight:	96 lbs (43.5 kg)
Minimum floor load:	43.9 lbs/ft ² (214.3 kg/m ²)
Water depth:	15-1/16" (383 mm)
Water capacity:	65 gal (246.1 L)
Electrical rating:	Heated Surface: 120 V, 1.1 A, 60 Hz Amplifier: 120 V, 50/60 Hz, 15 W
Pump speed:	3-speed

Notes

Measure your actual product for roughing-in details. Install this product in accordance with the installation instructions.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. Provide a third grounded outlet if connecting a powered wireless device or adapter. One electrical service may be used for the entire bath and related electrical components.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

NOTICE: Do not support the load weight of the bath by the rim. Confirm adequate support for rim-mount faucet; do not use faucets as a means of support.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.