
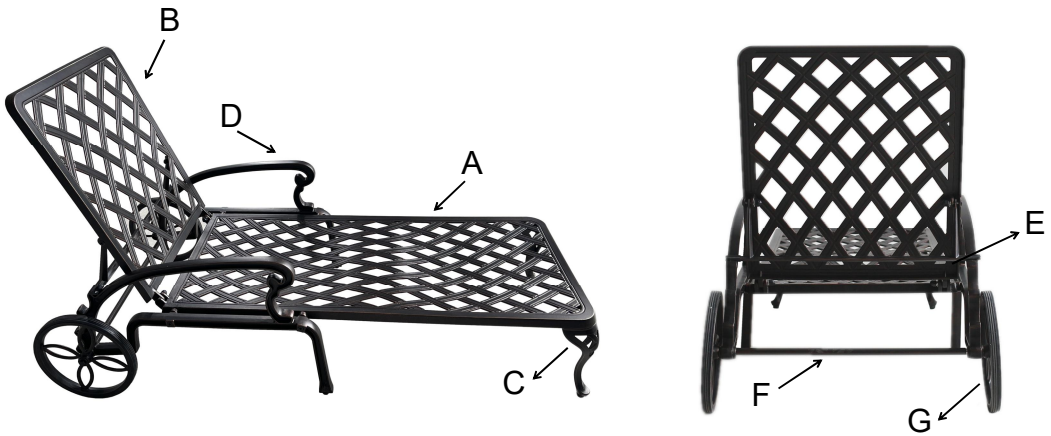


# Chaise Lounge Installation Instruction

## CAUTION:

1. Please read this instruction carefully before assembling. Count and organize all parts.
2. Assemble product on clean soft surface, such as a piece of carpet to prevent the surface painting from scratching off.

PARTS & HARDWARE LIST		
		
NO.	DESCRIPTION	QTY
A	SEAT	1
B	BACK	1
C	LEGS	2
D	ARMS	2
E	SUPPORTING AXLE	1
F	WHEEL AXLE	1
G	WHEELS	2

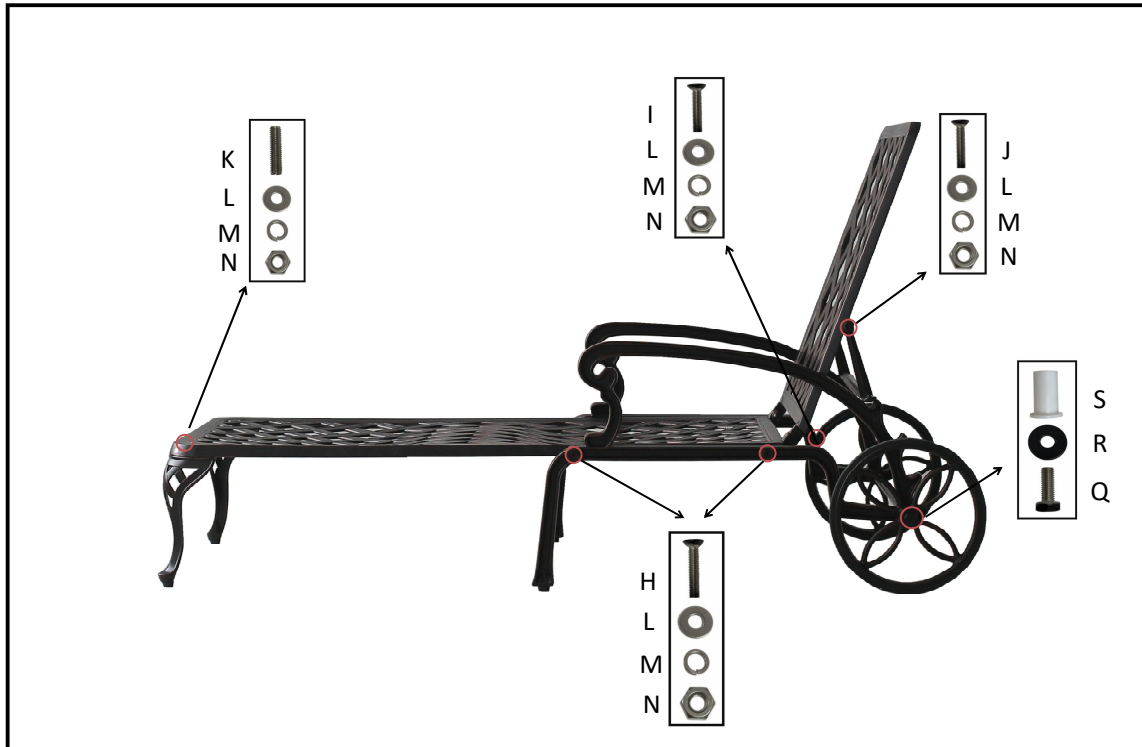

NO.	IMAGE	DESCRIPTION	QTY		IMAGE	DESCRIPTION	QTY
H		M8x70 FLAT HEAD SCREW	4	N		M8 NUTS	12
I		M8x50 FLAT HEAD SCREW	2	O		M8 NUTS CAPS	12
J		M8x45 FLAT HEAD SCREW	2	P		Foot Pads	4
K		M8x32 HEADLESS SCREW	4	Q		M10x25 HEXAGON SCREW	2
L		M8 FLAT WASHER	12	R		M10 FLAT WASHER	2
M		M8 SPRING WASHER	12	S		PLASTIC CAST	2
				T		SPANNER	1

### Installation steps

1. Connect seat (A) to one of the arms (D) with (H, L, M, and N).
2. Connect 2 arms with wheel axle, and then connect seat (A) to another arms (D) with (H, L, M, and N).
3. Fix 2 legs to seat with (K, L, M, and N).
4. Connect wheels (G) to the arms (D) with (S,R, Q).
5. Connect back (B) & supporting axle (E) with (J, L, M, and N).
6. Connect seat (A) & back (B) with (I, L, M, and N).
7. Adjust the foot pads (P) to make the chaise lounge stand evenly on the ground.

### PLEASE DO NOT OVER TIGHTEN

(Aluminum is soft metal; Over tightening may strip thread or break parts)