

ASSEMBLY INSTRUCTION

ASSEMBLY GUIDE

Congratulations, you are now the owner of the new chair!

Before enjoying the comfortable chair, you have to assemble it. This assembly guide will take you through the basic assembly process. To make sure your assembly progress goes smoothly, please follow the assembly instructions **especially the important safety information.**

It is possible to assemble the chair by your own, while having <u>a second person to</u> <u>help you will make it easier.</u>

Please check if there are any missing parts in the package before start. If there are any issues, please don't hesitate to drop us an email and we'll help you ASAP. If you run into any difficulty during the assembly, remember to check out the assembly Video to see if you've missed something. If you're still unable to resolve your problems, drop us an email and our support team will assist you.

MWARNING

To ensure proper assembly, please follow all steps and use all parts. Failure to follow this warning can result in serious injury to yourself or others.


Package List

• Without further ado, we kindly suggest you to list all parts needed for the chair first.


A*1	B*1	C*2	D*1	E*1
F*1	G*5	H*5	 *1	J*10 M6X16mm
K*4 M8X40mm	L*4 M6X25mm	M*4 M8X30mm	N*3 M8X20mm	O*1
P*4 ⊕	Q*1			


Assembly Instruction

• Use the carton/carpet as a working surface to prevent product damage during assembly.

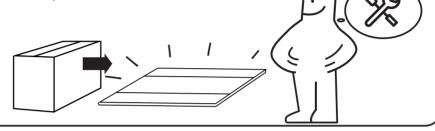


• Step 1






Remove the lid (O) of the base (F)

Connect each individual Chair leg(G) with the Base(F).



Connect the leg (G) and the base (F) with screws (J)




• Step 2


First, the wheel **(H)** is attached to the foot, then the base cover **(O)** is covered to the base, and finally the gas rod **(E)** is inserted into the center hole of the base

• Step 3

Fix the chassis **(D)** to the seat cushion **(B)** with screws **(L)**.

Note: Make sure the front of the mechanism and the knob is facing the front of the seat. There is a marking of FRONT on the mechanism and the seat.







• Step 4

Position the assembled chair up right with the Seat Mechanism(**D**) facing down. Insert the Gas Lift(**E**) into the center hole of the Seat Mechanism(**D**) and press down until fully engaged

• Step 5

Lift the magazine pocket on the back of the backrest (A) and fix the back steel plate (I) to the backrest (A) with screws (M).



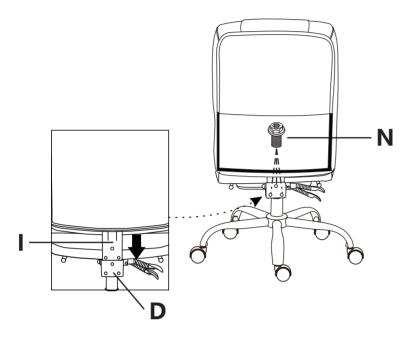


• Step 6

Insert the back steel plate (I) into the chassis mechanism (D) and fix it with screws (N).

• Step 7

Fix the left and right armrests (C) to the seat with screws (K), and then cover the stuffy cover (P) to the armrests (C).

Note: Armrests are labeled with an "L" (left) or "R" (right) to show which sides they should be placed on.





CAUTION:

Make sure all bolts and screws are fully tightened before using chair. Lubricate all moving parts and tighten all bolts/screws every 6 months or whenever needed.

CARE & MANTENANCE



DO NOT PUT HOT ITEMS DIRECTLY ON FURNITURE SURFACE.



DO NOT CLEAN FURNITURE WITH HARSH CLEANSERS OR POLISH.



DO NOT PLACE FURNITURE UNDER DIRECT SUNLIGHT.



DO NOT PLACE FURNITURE NEAR HEATING OR COOLING VENTS.



DO NOT WRITE ON FURNITURE WITHOUT A PADDED BARRIER TO PROTECT THE SURFACE.



DO NOT PLACE FURNITURE OUTSIDE, FOR INDOOR USE ONLY.



STAINS MAY BE REMOVED WITH MILD SOAP SOLUTION AND DAMP CLOTH.



DUST AND PICK-UP SPILLS USING A CLEAN, NON-COLORED, LINT-FREE CLOTH.

- **DO NOT** stand on the chair. **DO NOT** use the chair as stepladder.
- Use this product for seating one person at a time.
- **DO NOT** use the chair unless all bolts and screws are firmly secured.
- Avoid contact with sharp objects to prevent puncturing the fabric.
- Every 6 months or whenever needed, check all bolts and screws to ensure they are tight.
- Chair weight limit not to exceed **275 LBS**.